
COMMERCIAL ITEM DESCRIPTION

FUSE, PLUG, (TYPE T), TIME DELAY, DUAL ELEMENT, EDISON BASE

The General Services Administration has authorized the use of this commercial item description (CID).

Abstract. This CID covers the general requirements for a time delay, dual element type fuse plug. Fuse plugs covered by this CID are intended for commercial/industrial applications and shall not be used in military systems needing stringent environmental and electrical requirements.

Part or Identifying Number (PIN). The PIN for the CID shall be as shown in the following example:



Salient characteristics.

Design and construction. Fuse plugs supplied to this CID shall be as specified herein and shall meet the requirements of UL 198F for fuse plugs (see figure 1).

Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 125 V ac maximum.

Interrupt rating. The interrupt rating shall be 10,000 amperes rms at 125 volts.

Marking. Fuse plugs supplied to this CID shall be marked with the manufacturer's standard commercial PIN and the UL 198F listing mark.


Fuse plug base (screw shell). The screw shell shall be of the Edison base size in accordance with UL 198F.

Regulatory requirements. This section is not applicable to this CID.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

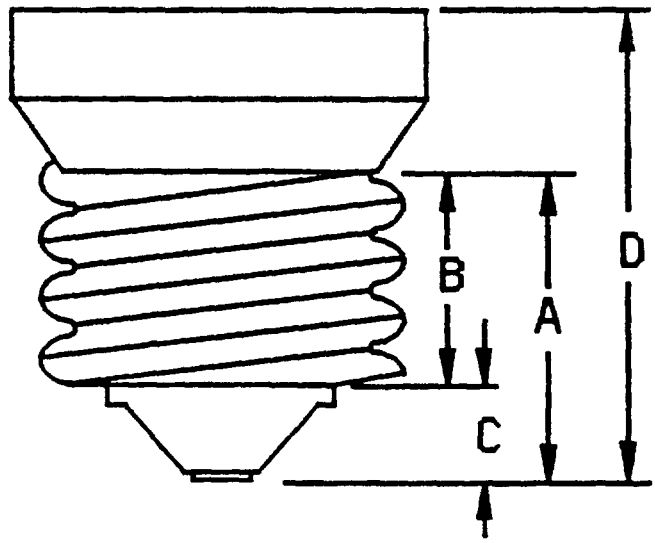

NOTES:

1. Dimensions are in millimeters.
2. Unless otherwise specified, tolerance is ±0.13 millimeter (.005 inch).
3. The US government preferred system of measurement is the metric SI system. However, since this item was originally designed using inch-pound units of measurement, in the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.
4. Dimension A: 19.1 millimeters (.75 inch) maximum.
5. Dimension B: Not less than three full threads 10.9 millimeters (.43 inch) minimum; seven threads per 25.0 millimeters (1.00 inch) in screw shell.
6. Dimension C: 4.80 millimeters (.187 inch) minimum, except that if the extension of the fusible element is externally soldered to the lower edge of the screw shell, the fusible element of the solder shall not be less than 3.20 millimeters (.125 inch).
7. Dimension D: 34.90 millimeters (1.375 inches) maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

Figure 1. Configuration and dimensions.

TABLE 1. Electrical characteristics.

A-A-55473-	Ampere rating	A-A-55473-	Ampere rating	A-A-55473-	Ampere rating
01	.25	13	2	25	6
02	.3	14	2.25	26	6.25
03	.4	15	2.50	27	7
04	.50	16	2.8	28	8
05	.6	17	3	29	9
06	.8	18	3.2	30	10
07	1	19	3.50	31	12
08	1.125	20	4	32	14
09	1.250	21	4.50	33	15
10	1.4	22	5	34	20
11	1.6	23	5.6	35	25
12	1.8	24	5.8	36	30

Quality assurance provisions.

Responsibility for inspection. The contractor is responsible for the performance of all inspection, examination, and test requirements specified in the contract or purchase order. The contractor may use his own or any other facilities suitable for inspection requirements specified in the contract or purchase order, unless otherwise disapproved by the acquiring activity. The acquiring activity reserves the right to perform any of the inspections set forth in the contract or purchase order where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Contractor certification statement. The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurances practices, and is the same as the product provided as a bid sample. The acquiring activity reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Certificate of compliance. A certificate of compliance shall accompany all fuse plugs supplied to this CID. The letter of certification shall state that the fuse plug is UL listed to the requirements of UL 198F for fuse plugs and it shall include the UL file number.

Packaging.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or purchase order.

Notes. This section contains relevant information which is useful to buyers, users, and suppliers in the process of acquiring the item, but is not mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

Referenced document. The following document, of the issue in effect on date of invitation for bids for request for proposal, form a part of this CID to the extent specified herein.

Other Publication

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 198F - Plug Fuses, Standard For.

(Applications for copies should be addressed to the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

Ordering data. The contract or purchase order shall specify the following:

a. CID document number and revision and CID PIN.

b. Quality assurance provisions.

c. Packaging requirements.

Comments. Comments on this CID should be directed to Defense Electronics Supply Center, 1507 Wilmington Pike, ATTN: DESC-EMM, Dayton, OH 45444-5270, or telephone (513) 296-6184, or fax (513) 296-8868.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

Suggested sources of supply. Suggested sources of supply are listed herein. Additional sources will be added as they become available.

CID dash number (see table I) A-A-55473-	Vendor commercial PIN CAGE 71400	CID dash number (see table I) A-A-55473-	Vendor commercial PIN CAGE 71400
01	T 1/4	19	T 3-1/2
02	T 3/10	20	T 4
03	T 4/10	21	T 4-1/2
04	T 1/2	22	T 5
05	T 6/10	23	T 5-6/10
06	T 8/10	24	T 5-8/10
07	T 1	25	T 6
08	T 1-1/8	26	T 6-1/4
09	T 1-1/4	27	T 7
10	T 1-4/10	28	T 8
11	T 1-6/10	29	T 9
12	T 1-8/10	30	T 10
13	T 2	31	T 12
14	T 2-1/4	32	T 14
15	T 2-1/2	33	T 15
16	T 2-8/10	34	T 20
17	T 3	35	T 25
18	T 3-2/10	36	T 30

Vendor CAGE number	Vendor name and address
71400	Bussmann P.O. Box 14460 St. Louis, MO 63178-4460 (314) 527-1253

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5920-D208)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.