
COMMERCIAL ITEM DESCRIPTION

CONNECTORS, PIN, ELECTRICAL, RECTANGULAR, RACK AND PANEL, PIN PROTECTOR

The General Services Administration has authorized the use of this commercial item description (CID)

Abstract This CID covers the general requirements for a pin protector for MIL-C-28748/9 connectors This pin protector can be used in applications that require an aluminum alloy pin protector Pin protectors covered by this CID are intended for commercial/industrial applications and shall not be used in military systems needing stringent environmental and electrical requirements.

Part or Identifying Number (PIN) The PIN for the CID shall be as shown in the following example



Salient characteristics

Design, construction, and dimensions Design, construction, and dimensions shall be as specified on figure 1 and table I


Material Pin protectors are manufactured from an aluminum alloy A380 in accordance with federal specification QQ-A-591, for durability and strength. Screw, lockwasher, and hex nut are stainless steel 300 series

Finish Pin protectors are anodized "dyed black" or electroless nickel, see table I Screw, lockwasher, and hex nut are passivated in accordance with QQ-P-35.

Regulatory requirements This section is not applicable to this CID

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

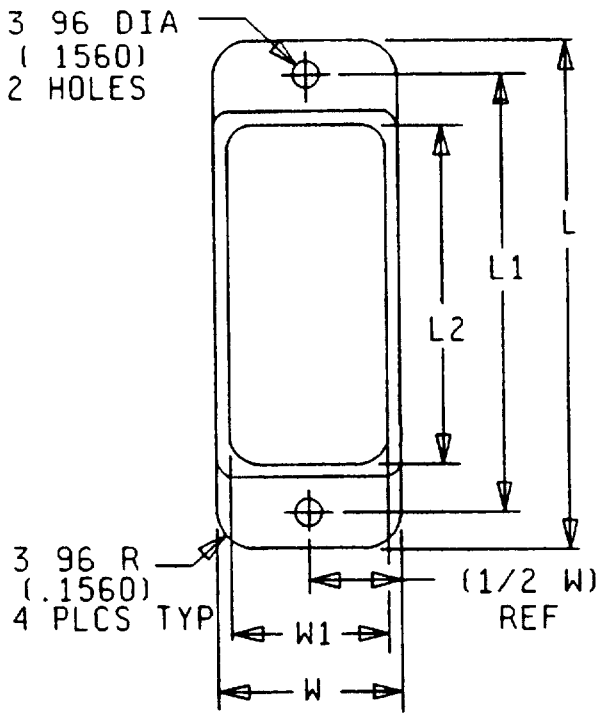

Dash numbers -01 through -06

Figure 1 Configuration and dimensions


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

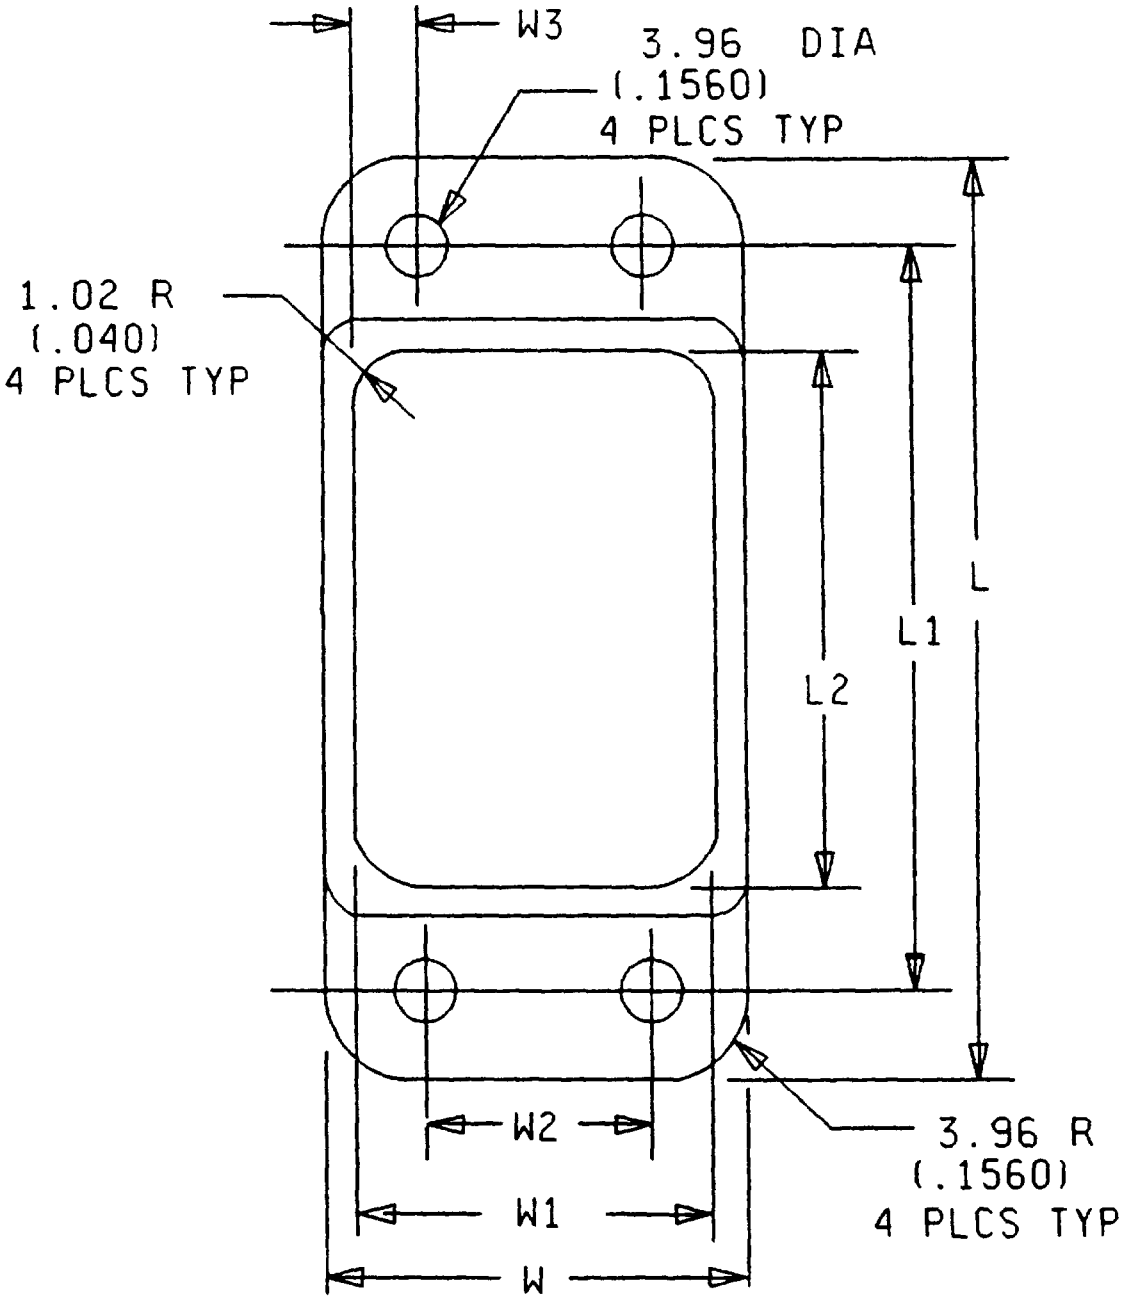

Dash numbers -07 through -16

Figure 1. Configuration and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

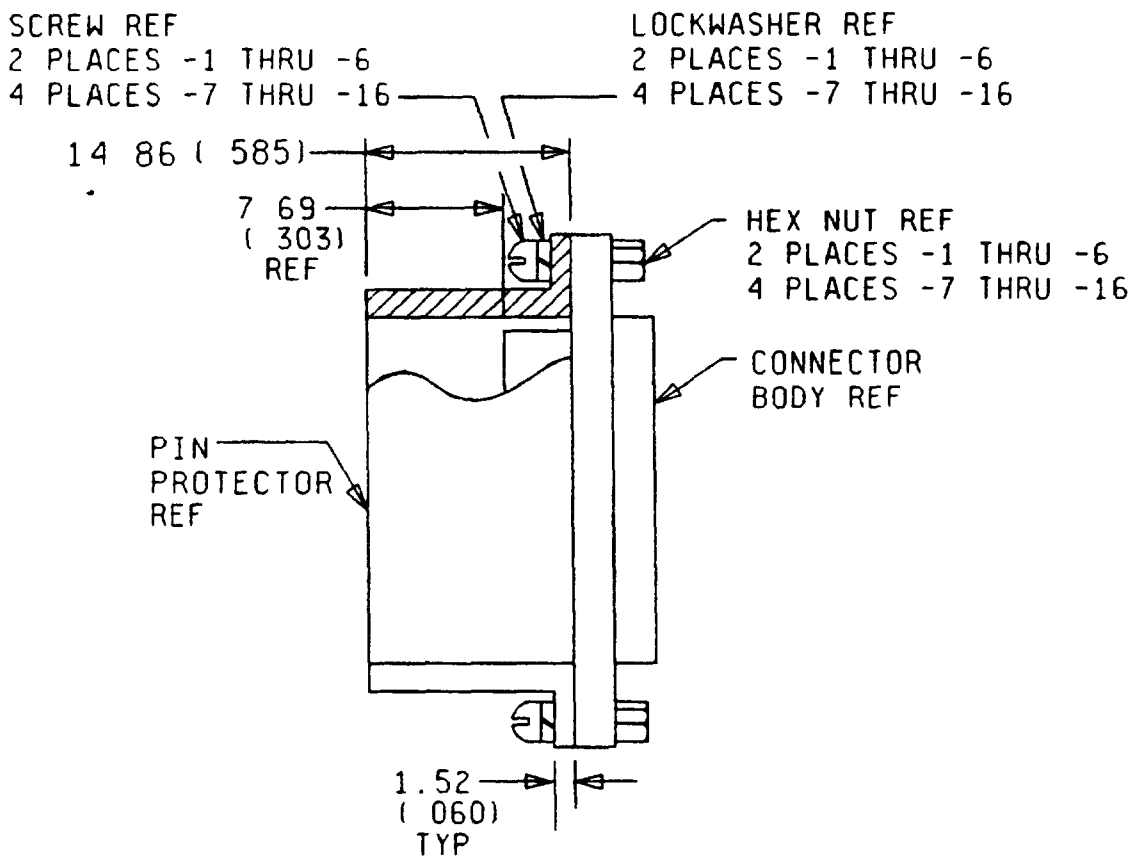

NOTES
1. Dimensions are in millimeters
2. Inches are in parentheses.
3. Unless otherwise specified, tolerance is ± 76 millimeter (±.030 inch)
4. The US government preferred system of measurement is the metric SI system However, this item was originally designed using inch-pound units of measurement In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence
5. Dimensions L2 and W1 are measured at non-flanged opening, with 1° maximum draft acceptable

Figure 1 Configuration and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

Quality assurance provisions

Responsibility for inspection Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements

Contractor certification statement The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurances practices, and is the same as the product provided as a bid sample The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Certificate of compliance A certificate of compliance shall accompany all pin protectors supplied to this CID.

Packaging

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, labeling, and marking shall be as specified in the contract or purchase order.

Notes This section contains relevant information which is useful to buyers, users and suppliers in the process of procuring the item, but is not mandatory

Referenced documents.

Federal Specifications

QQ-A-591	-	Aluminum Alloy Die Castings
QQ-P-35	-	Passivation Treatments For Corrosion-Resistant Steel.

Military Specification

MIL-C-28748/9	-	Connectors, Receptacle, Electrical, Rectangular, Rack and Panel, Polarized Center Jackscrew or Guidepin Style, Crimp Type Removable Pin Contacts, Size 16

(Copies of federal and military specifications are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094)

Ordering data (see table I). Acquisition documents should specify the following:

a. CID document number and revision and CID PIN.

b Quality assurance provisions.

c Packaging requirements

d Color (if applicable).

Comments Comments on this CID should be directed to Defense Electronics Supply Center, 1507 Wilmington Pike, ATTN DESC-EMT, Dayton, OH 45444-5000, or telephone (513) 296-5391

Sources of supply. A suggested source of supply is listed in table II. Additional sources will be added as they become available.

Cross-reference Cross-reference information is listed in table III, CID dash number to MIL-C-28748/9 insert designator

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I Ordering data

CID dash number A-A-55479- 1/ 2/	L mm (Inch)	L1 mm (Inch)	L2 mm (Inch)	W mm (Inch)	W1 mm (Inch)	W2 mm (Inch)	W3 mm (Inch)
01	42 55 (1 675)	33.02 (1.300)	24 59 (968)	14 49 (.570)	12.22 (481)	---	---
02	42 55 (1 675)	33.02 (1 300)	24.59 (.968)	14 49 (.570)	12.22 (481)	---	---
03	42.55 (1.675)	33 02 (1.300)	24 59 (.968)	21.21 (.835)	18 82 (741)	---	---
04	42.55 (1 675)	33.02 (1.300)	24 59 (968)	21.21 (.835)	18.82 (.741)	---	---
05	53.98 (2 125)	44 45 (1 750)	35 99 (1 42)	21.21 (.835)	18.82 (741)	---	---
06	53 98 (2 125)	44 45 (1 750)	35 99 (1 42)	21.21 (.835)	18 82 (741)	---	---
07	57.79 (2.275)	48.26 (1.900)	39 78 (1.566)	27.81 (1.095)	25.43 (1.001)	13 97 (.550)	5 69 (.224)
08	57.79 (2.275)	48 26 (1 900)	39.78 (1.566)	27.81 (1.095)	25.43 (1.001)	13 97 (.550)	5 69 (.224)
09	61.60 (2 425)	51 94 (2 045)	43 46 (1 711)	34 42 (1.355)	32.03 (1 261)	20 62 (812)	5 74 (.226)
10	61.60 (2 425)	51 94 (2 045)	43 46 (1 711)	34 42 (1 355)	32 03 (1 261)	20 62 (812)	5 74 (.226)
11	73.03 (2 875)	63 50 (2.500)	55 04 (2 167)	34 42 (1 355)	32 03 (1.261)	20 62 (.812)	5 74 (.226)
12	73 03 (2.875)	63.50 (2.500)	55 04 (2 167)	34 42 (1.355)	32 03 (1.261)	20 62 (.812)	5 74 (.226)
13	73 03 (2.875)	63.50 (2.500)	55.04 (2 167)	47.37 (1.865)	44.98 (1.771)	31.75 (1.250)	6 65 (.262)
14	73 03 (2.875)	63.50 (2.500)	55.04 (2 167)	47.37 (1.865)	44.98 (1.771)	31 75 (1.250)	6.65 (262)
15	73.03 (2.875)	63 50 (2.500)	55 04 (2 167)	60 83 (2.395)	58 45 (2.301)	46 99 (1 850)	5 77 (227)
16	73.03 (2.875)	63 50 (2 500)	55 04 (2 167)	60 83 (2 395)	58 45 (2 301)	46 99 (1 850)	5 77 (227)

1/ Odd CID dash numbers are electroless nickel finish
2/ Even CID dash numbers are anodized and dyed black

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II Suggested sources of supply

CID dash number 1/ 2/ A-A-55479-	Vendor commercial PIN	Vendor CAGE number
01	MAC0010S004	53669
02	MAC0010S001	53669
03	MAC0020S004	53669
04	MAC0020S001	53669
05	MAC0036S004	53669
06	MAC0036S001	53669
07	MAC0052S004	53669
08	MAC0052S001	53669
09	MAC0080S004	53669
10	MAC0080S001	53669
11	MAC0104S004	53669
12	MAC0104S001	53669
13	MAC0158S004	53669
14	MAC0158S001	53669
15	MAC0212S004	53669
16	MAC0212S001	53669

1/ Odd CID dash numbers are electroless nickel
2/ Even CID dash numbers are anodized and dyed black.

Vendor CAGE number	Vendor name and address
53669	Packard Hughes Interconnect 17150 Von Karman Avenue Irvine, CA 92713-9685

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE III Quick cross-reference

CID dash number 1/ 2/ A-A-55479-	MIL-C-28748/9 insert designator	Connector size
01	A or J	10
02	A or J	10
03	B or K	20
04	B or K	20
05	C or L	36
06	C or L	36
07	D or M	52
08	D or M	52
09	E or N	80
10	E or N	80
11	F or P	104
12	F or P	104
13	G or R	158
14	G or R	158
15	H or S	212
16	H or S	212

1/ Odd CID dash numbers are electroless nickel finish
2/ Even CID dash numbers are anodized and dyed black

CIVIL AGENCY COORDINATING ACTIVITY

GSA - 7FXE

PREPARING ACTIVITY

DLA-ES

(Project 5935-D481)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.