A-A-55485/10
September 30, 1993
SUPERSEDING
MIL-M-38527/10B
May 19, 1989

COMMERCIAL ITEM DESCRIPTION

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, LEAD CONVERSION, .200 DIAMETER PIN CENTER

The General Services Administration has authorized the use of this commercial item description (CID) in preference to MIL-M-38527/10B.

Abstract This CID covers mounting pads with pin through-holes beginning on a .200 diameter circle and tapering at an angle to a different diameter exit circle.

Part or Identifying Number (PIN). The PIN shall be A-55485/10- (plus a dash number from figure 1 and a material letter as shown below). Complete PIN example: A-55485/10-001D.

Salient characteristics.

Material Material shall be diallyl phthalate (D) or nylon (N)

Configurations and dimensions. Configurations and dimensions shall be as specified on figure 1

Regulatory requirements This section is not applicable to this CID.

Quality assurance provisions. Quality assurance provisions shall be as specified in A-A-55485.

Packaging. Packaging shall be as specified in A-A-55485.

Suggested sources of supply. Suggested sources of supply are shown in table I.

Supersession data. Supersession data shall be as specified in table II.

Notes. The following information may be useful in acquiring the items described, but is not directive in nature.

Ordering data. Ordering data shall be as specified in A-A-55485.


Comments. Comments and requests for changes to this CID should be directed to Defense Electronics Supply Center, ATTN: DESC-EBM, 1507 Wilmington Pike, Dayton, OH 45444-5270, telephone (513) 296-5255, FAX (513) 296-8868.

AMSC N/A FSC 5999


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

Inches	mm
.020	0.51
.025	0.64
.030	0.76
.031	0.79
.048	1.22
.055	1.40
.060	1.52
.096	2.44
.100	2 54
.192	4.88
350	8.89

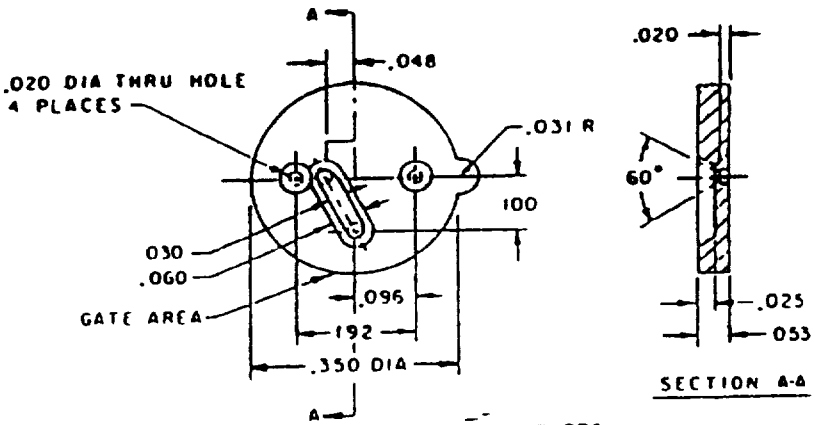

A-55485/10-001

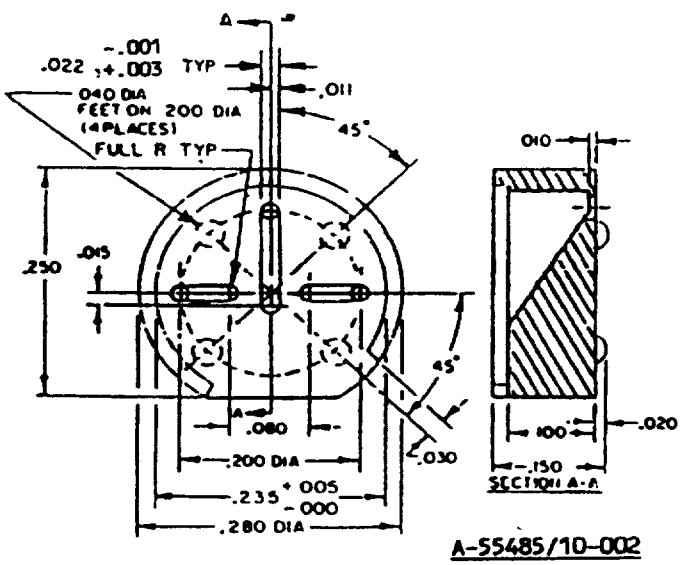


A-55485/10-002

Inches	mm
.001	0.03
.005	0.13
.010	0.25
.011	0.28
.015	0.38
.020	0.51
.022	0.56
.030	0.76
.040	1.02
.080	2.03
.100	2.54
.150	3.81
.200	5.08
.235	5.97
.250	6.35
.280	7.11

Figure 1. Configurations and dimensions.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

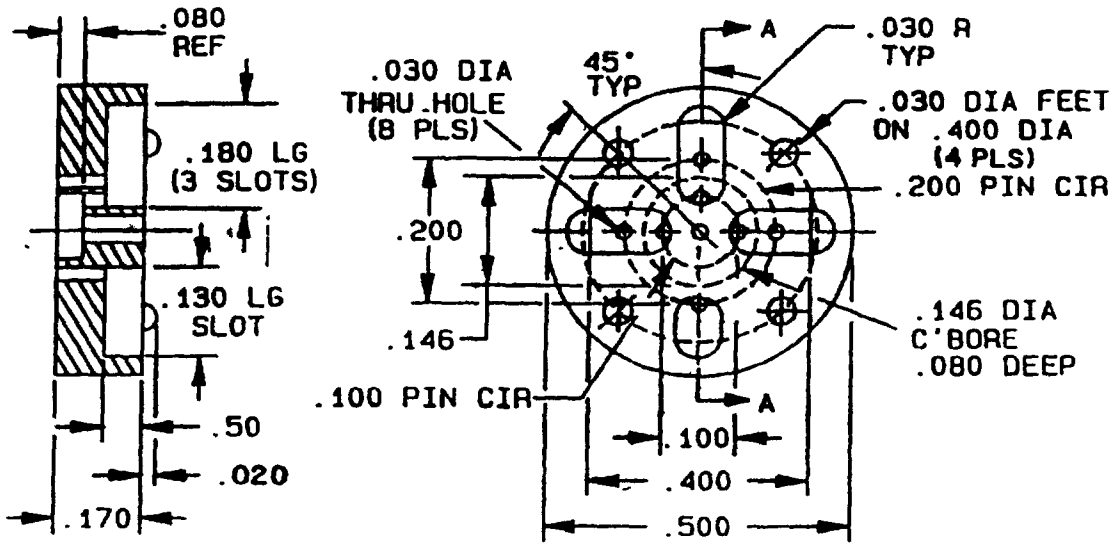

Inches	mm
.020	0.51
.030	0.76
.050	1.27
.100	2.54
.146	3.71
.170	4.32
.180	4.57
.200	5.08
.400	10.16
.500	12.70

SECTION A-A

A-55485/10-003

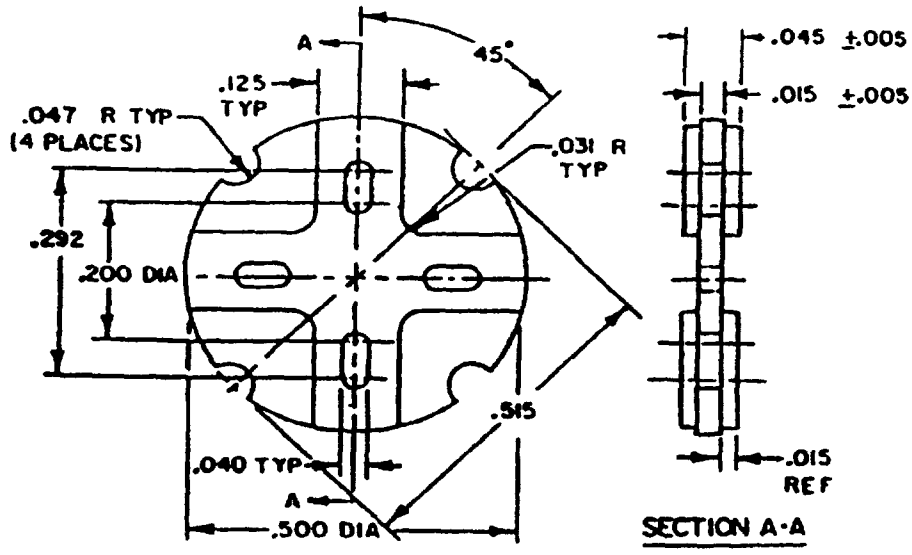


Inches	mm
.005	0.13
.015	0.38
.031	0.79
.040	1.02
.045	1.14
.047	1.19
.125	3.18
.200	5.08
.292	7.42
.550	12.70
.515	13.08

A-55485/10-004


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

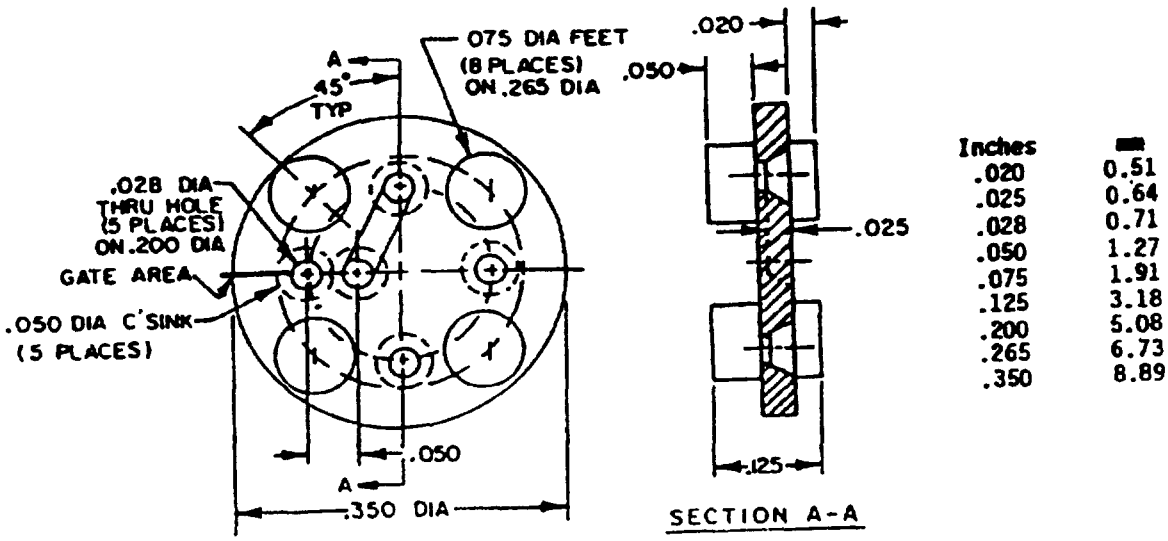

Inches	mm
.020	0.51
.025	0.64
.028	0.71
.050	1.27
.075	1.91
.125	3.18
.200	5.08
.265	6.73
.350	8.89

A-55485/10-005

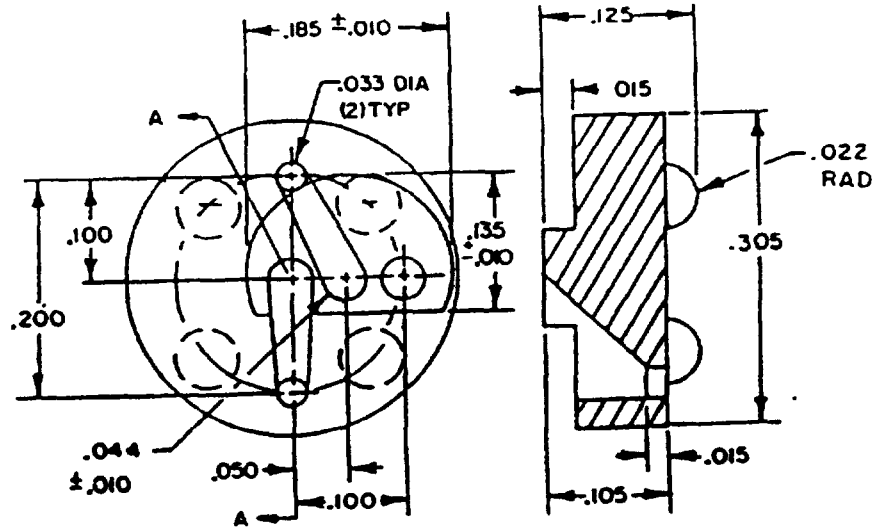

Inches	mm
.010	0.25
.015	0.38
.022	0.56
.033	0.84
.044	1.12
.050	1.27
.100	2.54
.105	2.67
.125	3.18
.135	3.43
.185	4.70
.200	5.08
.210	5.33
.305	7.75

A-55485/10-006

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on height of pad shall be ±.015 (0.38 mm).
4. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for decimals and ±1° on angles. A .010 (0.25 mm) radius is permissible on corners and edges. A 1° draft is permitted on sides

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply. 1/

CID PIN (see figure 1) A-55485/10-	Vendor commercial PIN 2/					
	CAGE code 07047	CAGE code 21071	CAGE code 24227	CAGE code 32559	CAGE code 53174	CAGE code 54355
001N	10126N	10296-1				965-685N
001D	10126D	10296-2			AP-226/D	965-685D
002N	10171N	10304-1			AP-234/N	965-623N
002D	10171D	10304-2			AP-234/D	965-623D
003N						
003D	10025D					
004N		10366-1			AP-174/N	965-534N
004D	10061D	10366-2			AP-174/D	965-534D
005N		10298-1			AP-146/N	965-538N
005D	10032D	10298-2	2014		AP-146/D	965-538D
006N		10142-1		207-125	AP-023/N	965-544N
006D		10142-2			AP-023/D	965-544D

1/ This table is not a qualified products list or an approved source list. The vendors listed have submitted Certificates of Compliance (see A-A-55485) to DESC-EMM; however, parts may be ordered from any manufacturer who agrees to supply products that meet all the requirements of this CID.

2/ Vendor commercial PIN's are given for reference only. Do not use these numbers for ordering purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply - Continued. 1/

Vendor CAGE number	Vendor name and address
07047	Milton Roos Company 262 Valley Road Warrington, PA 18976-2533 (215) 491-0600
21071	Globe Plastics, Incorporated 13477 Twelfth Street Chino, CA 91710-9998 (909) 464-1520
24227	Teknational Industries, Incorporated 480 Clinton Avenue South Rochester, NY 14620-1103 (716) 232-1291
32559	Bivar, Incorporated 4 Thomas Irvine, CA 92718-2512 (714) 951-8808
53174	APX Plastics Company 3407 Dalworth Street Arlington, TX 76011-6815 (817) 275-3883
54355	Accessories for Electronics, Incorporated 800 Merrick Road Baldwin, NY 11510-3593 (516) 546-1751

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information 1/

Superseded (old) PIN in accordance with MIL-M-38527/108: M38527/10-	Superseding (new) CID PIN A-55485/10-
001	001
002	002
003	003
004	004
005	005
006	006
007	007

1/ Complete PIN shall include a suffix letter to denote material.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5999-0313-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.