INCH-POUND

A-A-55487A
7 March 2022
SUPERSEDING
A-A-55487
23 November 1994

COMMERCIAL ITEM DESCRIPTION (CID)

PIN, LOCK (HITCH PIN)

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all Federal Agencies.

1. SCOPE. This commercial item description depicts the requirements for a lock pin (hitch pin).

2. SALIENT CHARACTERISTICS.

2.1. Material.

TABLE I. Stainless steel spring wire, type 316 (UNS S31600), in accordance with ASTM A313/A313M.
TABLE II. Carbon steel spring wire, Type I, Class 1 or 2 in accordance with SAE AMS-QQ-W-428.

2.2. Surface treatment/plating.

A. Cres pins shall be passivated in accordance with SAE AMS2700, except hexavalent chromium (dichromate) is prohibited.
B. Carbon steel pins shall be zinc plated, Type V, FE/ZN12 in accordance with ASTM B633.

2.3. Dimensions and Tolerance.

Tolerance is ± .0156, unless otherwise specified.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and data which may improve this document should be sent to: DLA Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or emailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

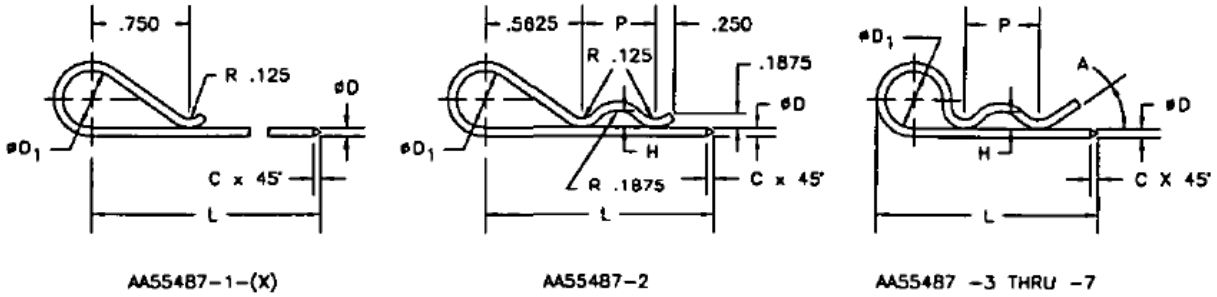


Table I. Cres pins.

CID P/N	Ø D WIRE	L LENGTH	Ø D_1 EYE	H HEIGHT	P PITCH	A ANGLE ± 5°	C X 45° CHAMFER, MIN	CLEVIS PIN DIA REF
-1(x)	.080 +.000 - .002	1/	.375	-	-	-	.020	-
-2	.080 +.000 - .002	1.938	.375	.188	.750	-	.020	.375
-3	.0295 ±.001	.594	.094	.047	.188	35°	.014	.125
-4	.0585 ±.001	1.125	.250	.094	.375	35°	.020	.250
-5	.0725 ±.002	1.438	.313	.094	.500	35°	.020	.312
-6	.0915 ±.002	1.875	.688	.125	.563	35°	.020	.375
-7	.1480 ±.002	2.688	.781	.125	.875	35°	.020	.625

1/ AA55487-1-(x) Only: Second dash number indicates length L in increments of one (1) inch.

Example: AA55487-1-7 is the part number for a type AA55487-1 pin with length (L) of seven (7) inches. Length (L) available in 1, 2, 3, 4, 5, 7, 8, 10, 12, 13, 18, 19, 20, 25, or 26 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

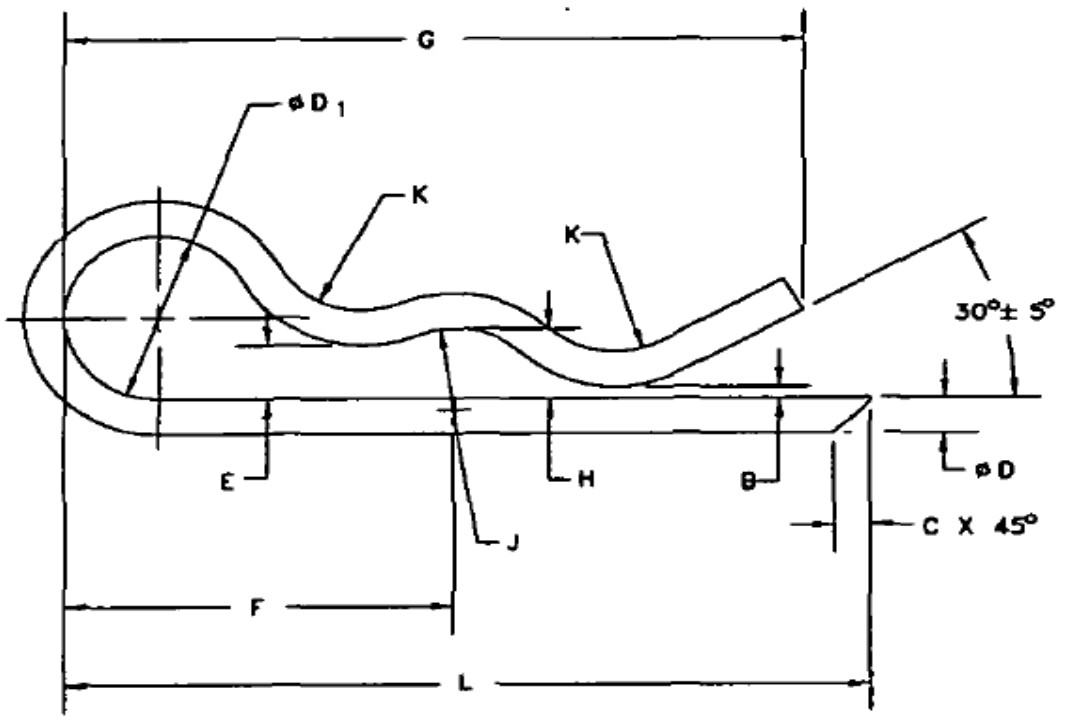


Table II. Zinc plated carbon steel pins.

CID P/N	Ø D	B	G	J (RAD)	H	F	Ø D_1	E	K (RAD)	L	C X 45°	CLEVIS PIN DIA (REF)
-8	.062 ± .001	.03	.81	.12	.08	.48	.18	.03	.16	.88	.014	.25
-9	.062 ± .001	.03	.81	.09	.08	.48	.18	.03	.16	.88	.014	.19
-10	.093 ± .002	.03	.94	.16	.09	.56	.22	.05	.19	1.03	.014	.31
-11	.093 ± .002	.09	.94	.22	.16	.53	.22	.11	.19	1.03	.014	.44
-12	.093 ± .002	.06	1.50	.12	.16	.62	.32	.08	.25	1.66	.020	.25
-13	.125 ± .002	.06	1.31	.25	.16	.73	.32	.11	.25	1.41	.020	.50
-14	.125 ± .002	.09	1.50	.31	.22	.73	.32	.16	.16	1.59	.020	.62
-15	.125 ± .002	.03	1.62	.38	.22	.88	.38	.12	.19	1.75	.020	.75
-16	.125 ± .002	.03	2.62	.50	.31	1.25	.62	.25	.38	2.75	.020	1.00
-17	.125 ± .002	.06	3.00	.62	.34	1.38	.62	.28	.50	3.12	.020	1.25
-18	.148 ± .002	.03	2.75	.25	.16	1.38	.62	.31	.25	3.06	.020	.50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

3. REGULATORY REQUIERMENTS. The offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation FAR, or the sustainable acquisition of EO 13693; as applicable

4. PRODUCT CONFORMANCE PROVISIONS.

4.1. Product conformance. The pins provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

4.2. Inspection requirements. The suppliers shall be responsible for those in process controls and inspections necessary to supply a product consistently conforming to the requirements of this document.

4.3. Certification. Upon request, the supplier will certify with documented test/inspection evidence, that the parts supplied meets the requirements of this document.

5. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES.

6.1. All dimensions are in inches.

6.2. Chamfer as shown and remove all burrs and break sharp edges.

6.3. Interpret drawing in accordance with ASME Y14.5.

6.4. Documents. Referenced documents shall be of the issue in effect on the date of the invitation for bids. ASTM A313/A313M and ASTM B633 are available for purchase online from www.astm.org. SAE AMS-QQ-W-428 and SAE AMS2700 are available for purchase online from www.sae.org. ASME Y14.5 is available for purchase online at www.asme.org. The Federal Acquisition Regulation FAR is available for free online at www.acquisition.gov. EO 13693 is available for free online at www.govinfo.gov.

6.5. Ordering Data. Acquisition documents should specify the following:


a. Title, number, and date of this commercial item description.
b. Part or Identification Number of the item being ordered.
c. Product conformance (see 4.1).
d. Inspection certification (see 4.2)
e. Packaging requirements (see 5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

6.6. Part or Identification Number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

The part number shall consist of the basic CID number and a dash number from Table I or Table II.

Example: AA55487 – 2

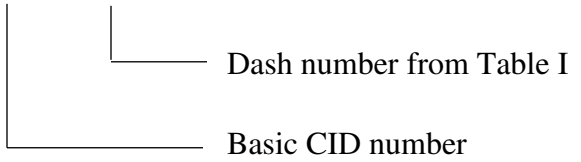

Example: AA55487 – 8

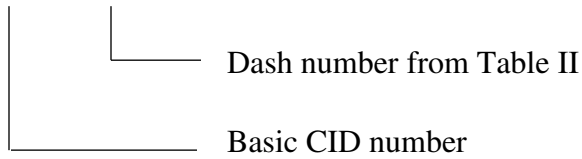


Table III. Cross-reference table.

Cancelled MS Pin	Replacement CID Pin
AN415 - • 1/	AA55487 - • 1/

1/ • Represents the same designation codes for both AN and CID pins.

Custodians:
Army – AV
Navy – AS
Air Force – 99
DLA – GS

Preparing Activity:
DLA – GS7

(Project 5315-2022-001)

Review Activities:
Army – AT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.