[METRIC]
A-A-55490B
May 1, 2008
SUPERSEDING
A-A-55490A
January 28, 2005

COMMERCIAL ITEM DESCRIPTION

CIRCUIT BREAKER, AUTOMOTIVE TYPE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the general requirements for an automotive type circuit breaker. Circuit breakers covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system that is included in the PIN as shown in the following example (see 7.1).

AA55490	-	001
CID number		Dash number (see table I)

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Automotive circuit breakers supplied to this CID shall be as specified herein (see figure 1) and shall meet the requirements of SAE J553 for automotive type circuit breakers (see figure 1).

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 12 V dc.

3.4 Termination style. The termination style shall be 10-32 threaded studs and shall be supplied with lock washers and hex nuts (see figure 1).

3.5 Marking. Circuit breakers supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN. (NOTE: The part number marked on the unit pack shall be the CID PIN.)

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, P.O. Box 3990, Columbus, OH 43218-3990, or email mailto:CircuitProtect@dscc.dla.mil. Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at http://assist.daps.dla.mil.

AMSC N/A FSC 5925

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

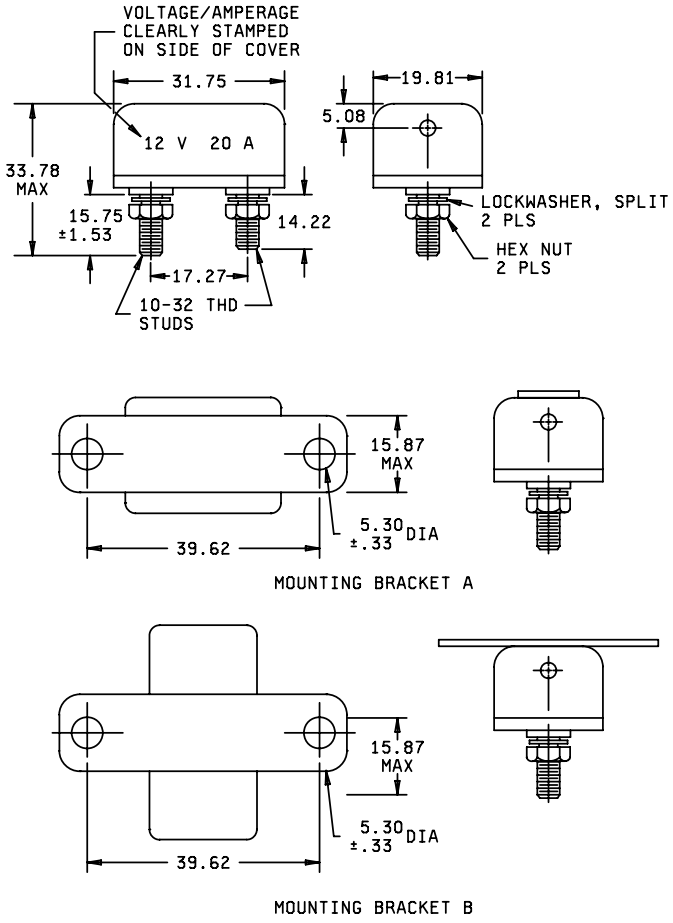

mm	Inches	mm	Inches
0.33	.012	15.87	.625
1.53	.060	17.27	.680
5.08	.200	19.81	.780
5.30	.208	31.75	1.250
14.22	.559	33.78	1.330
15.75	.620	39.62	1.560

NOTES:

1. Dimensions are in millimeters.
2. Unless otherwise specified, tolerance is ±0.13 millimeter (.005 inch).
3. The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

AA55490-	Ampere rating	Mounting bracket configuration	AA55490-	Ampere rating	Mounting bracket configuration
001	4	No bracket	019	15	Mounting bracket A
002	5		020	20	
003	6		021	25	
004	8		022	30	
005	10		023	40	
006	12		024	50	
007	15		025	4	Mounting bracket B
008	20		026	5	
009	25		027	6	
010	30		028	8	
011	40		029	10	
012	50		030	12	
013	4	Mounting bracket A	031	15	
014	5		032	20	
015	6		033	25	
016	8		034	30	
017	10		035	40	
018	12		036	50	

3.6 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.7 Workmanship. Circuit breakers shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

7.2 Environmentally preferable material. Environmentally preferable materials should be used to the maximum extent possible to meet the requirements of this specification. As of the dating of this document, the U.S. Environmentally Protection Agency (EPA) is focusing efforts on reducing 31 priority chemicals. The list of chemicals is available on their website at http://www.epa.gov/epaoswer/hazwaste/minimize/chemlist.htm. Further information is available at the following EPA site: http://www.epa.gov/epaoswer/hazwaste/minimize/. Included in the EPA list of 31 priority chemicals are cadmium, lead, and mercury. Use of the materials on the list should be minimized or eliminated unless needed to meet the requirements specified herein (see Section 3).

7.3 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these circuit breakers to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.4 Source of documents.

FEDERAL ACQUISITION REGULATION (FAR)

FAR - Federal Acquisition Regulations.

(Copies of this document are available online at http://www.acquisition.gov/comp/far/index.html from the U.S. Government Printing Office, 732 North Capital Street, NW, Washington D.C. 20401-0001.)

Other Publications

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J553 - Circuit Breakers.

(Copies of these document are available online at http://www.sae.org/ or from the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

7.5 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.6 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer's CAGE	Manufacturer's name and address
71400	Cooper Bussmann, Incorporated Automotive Products 7300 W. Wilson Avenue Chicago, IL 60706-4792 Phone number: (800) 323-1226 Facsimile number: (800) 544-2570 E-mail: emailto:fusebox@cooperindustries.com Uniform Resource Locator (URL): http://www.bussauto.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

7.7 Part number (P/N) supersession data. These CID PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N supersession data.

CID dash number (see table I) AA55490-	MFR's CAGE 11873 MFR's P/N 1/	CID dash number (see table I) AA55490-	MFR's CAGE 11873 MFR's P/N 1/
001	N/A	019	121B15-B2P-HA
002	121B05-00M-HA	020	121B20-B2P-HA
003	121B06-00M-HA	021	121B25-B2P-HA
004	121B08-00M-HA	022	121B30-B2P-HA
005	121B10-00M-HA	023	121B40-B2P-HA
006	121B12-00M-HA	024	121B50-B2P-HA
007	121B15-00M-HA	025	N/A
008	121B20-00M-HA	026	121B05-A2P-HA
009	121B25-00M-HA	027	121B06-A2P-HA
010	121B30-00M-HA	028	121B08-A2P-HA
011	121B40-00M-HA	029	121B10-A2P-HA
012	121B50-00M-HA	030	121B12-A2P-HA
013	N/A	031	121B15-A2P-HA
014	121B05-B2P-HA	032	121B20-A2P-HA
015	121B06-B2P-HA	033	121B25-A2P-HA
016	121B08-B2P-HA	034	121B30-A2P-HA
017	121B10-B2P-HA	035	121B40-A2P-HA
018	121B12-B2P-HA	036	121B50-A2P-HA

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see 3.5.

7.8 Government users. To acquire information on obtaining these circuit breakers from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-FMX, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-3677.

7.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5925-2008-005

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.