The documentation and process conversion measures necessary to comply with this revision shall be completed by 4 November 1999.

INCH-POUND

MIL-PRF-19500/297C
4 August 1999
SUPERSEDING
MIL-S-19500/297B
30 Mar 1989

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER,
TYPES 1N1184, 1N1186, 1N1188, 1N1190, 1N3766, 1N3768,
1N1184R, 1N1186R, 1N1188R, 1N1190R, 1N3766R, 1N3768R,
JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon semiconductor power rectifier diodes. Three levels of product assurance are provided for each device as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (DO-5).

1.3 Maximum ratings.

Type	V_R(non-rep)	V_R	V_{RM}	I_O 1/ T_C = 150°C	i_f(surge) at 1/120 s T_C = 150°C	Barometric pressure (reduced)	t_{rr}
	V (pk)	V dc	V (pk)	A dc	A	mmHg	µs
1N1184	120	100	100	35	500	8	10
1N1186	240	200	200	35	500	8	10
1N1188	480	400	400	35	500	8	10
1N1190	720	600	600	35	500	16	10
1N3766	960	800	800	35	500	30	10
1N3768	1,200	1,000	1,000	35	500	54	10

1/ Derate linearly 1.4 A dc/°C between T_C = 150°C to T_C = 175°C.

Storage temperature: T_C = -65°C to +175°C.

Operating temperature: T_C = -65°C to +150°C.

1.4 Primary electrical characteristics. $R_{\theta JC}$ = 0.8°C/W maximum.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in section 3 and 4 of this specification, whether or not they are listed.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

FEDERAL

FED-STD H28 -- Screw Thread Standards for Federal Services

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification takes precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.3 Interface requirements and physical dimensions. The Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and figure 1 (DO-5).

3.3.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750 and herein. Where a choice of lead finish is desired, it shall be specified in the contract or purchase order (see 6.2).

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.4.1 Polarity. The polarity shall be indicated by a graphic symbol with the arrow pointing toward the negative end for forward bias. The reversed units shall also be marked with an R following the last digit in the type number.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.6 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.7 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturer's list before contract award (see 4.2 and 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.

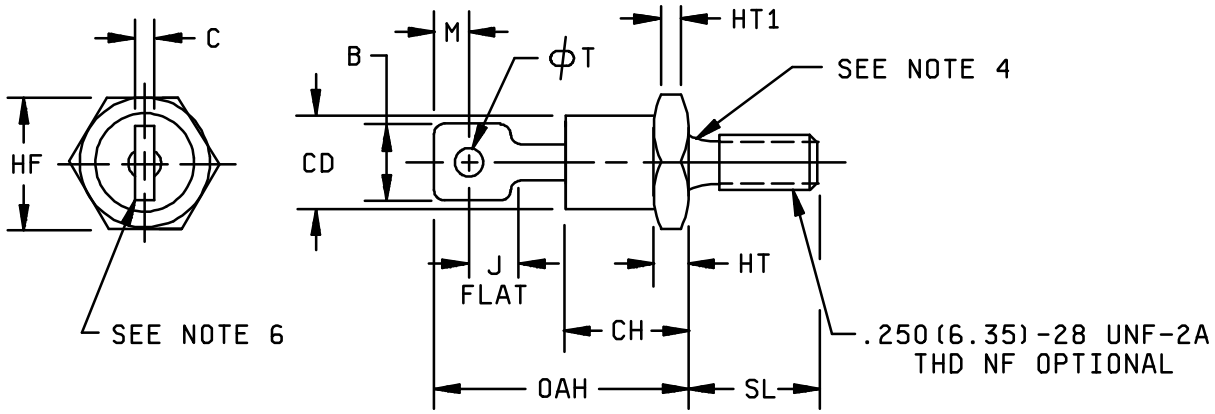


FIGURE 1. Physical dimensions, (all device types) DO-5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
OAH		1.000		25.40
CH		0.450		11.43
HT	0.115	0.200	2.93	5.08
SL	0.422	0.453	10.72	11.50
HT_1	0.060		1.53	
B	0.250	0.375	6.35	9.52
CD		0.667		16.94
HF	0.667	0.687	16.95	17.44
J	0.156		3.97	
ϕT	0.140	0.175	3.56	04.44
C		0.080		2.03
M	0.030		0.77	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Units must not be damaged by torque of 30 inch-pounds applied to 0.250-28 UNF-28 nut assembled on thread.
4. Diameter of unthreaded portion 0.249 inch (6.32 mm) max and 0.220 inch (5.59 mm) min.
5. Complete threads to extend to within 2.5 threads of seating plane.
6. Angular orientation of this terminal is undefined.
7. Max pitch diameter of plated threads shall be basic pitch diameter 0.2268 inch (5.76 mm) reference FED-STD-H28 (Screw Thread Standards for Federal Services.)
8. A chamfer or undercut on one or both ends of the hex portion is optional; minimum base diameter at seating plane. 0.600 inch (15.24 mm).

FIGURE 1. Physical dimensions, (all device types) DO-5 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.

4.VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500, and as specified herein. Tests in either polarity shall be sufficient to obtain qualification approval of both polarities.

4.3 Screening (JANTX and JANTXV levels only). Screening shall be in accordance with MIL-PRF-19500 (table IV) and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement
	JANTX and JANTXV levels
1/	Surge (see 4.3.1) Thermal response (see 4.3.2)
4	Not applicable
9	V_{F2} and I_{R1} 2/
10	MIL-STD-750, method 1038, test condition A, t = 48 hours
11	Subgroup 2 of table I herein, V_{F2} and I_{R1}; ΔV_{F2} = 0.1 V(pk) from initial value; ΔI_{R1} = ± 5 µA dc or 100 percent from the initial value, whichever is greater. 3./
12	Not applicable
13	Not applicable

1/ Surge shall precede thermal response. These tests shall be performed anytime after screen 3 and before screen 9.

2/ I_{R1} measurement shall not be indicative of an open condition.

3/ PDA of screen 13 shall apply to screen 11.

4.3.1 Surge current. Surge current, see MIL-STD-750, method 4066. I_O = 0; $V_{RM}(w)$ = 0; I_{FSM} = 500a; six surges; T_A = 25°C, t_p = 8.3 ms, one surge per minute maximum.

4.3.2 Thermal response. The thermal response measurements shall be performed in accordance with method 3101 of MIL-STD-750. The thermal response conditions and maximum thermal response limit shall be derived by each vendor. The chosen thermal response measurement and conditions for each device in the qualification lot shall be submitted in the qualification report and a thermal response curve shall be plotted. The chosen thermal response values shall be considered final after the manufacturer has had the opportunity to test five consecutive lots. Heating current (I_H) ≥ rated I_O; t_H = 150 to 400 ms; t_{MD} = 50 to 300 µs; 50 mA ≤ I_M ≤ 250 mA.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IVb (JANTX and JANTXV) of MIL-PRF-19500, and herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

4.4.2.1 Group B inspection, table VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
B2	4066	T_C = 150°C; V_R = Rated V_R (see 1.3), six 1/120 s surges. 1 surge per minute maximum. t_p = 8.3 ms. i_f (surge) = 500 A superimposed on I_O = 35 A dc
B3	1037	0.25 Rated $I_O \leq I_O$ applied $\leq$ Rated I_O (see 4.5.1) 2,000 cycles.
B3	1038	Condition A; 340 hrs.
B5		Not required

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

4.4.3.1 Group C inspection, table VII of MIL-PRF-19500.

Subgroup	Method	Condition
C2	2036	Test condition B, weight = 15 pounds, t = 15 s.
C2	2036	Test condition D1, terminal torque = 3 ounce-inches, t = 15 s.
C2	2036	Test condition D2, stud torque = 30 pound-inches, t = 15 s.
C5	3101	$R_{\theta JC}$ = 0.8°C/W maximum; I_M = 50 - 250 mA; $I_H \geq$ rated I_O; t_H = 150 to 400 ms; t_{MD} = 50 to 300 µs
C6	1037	0.25 Rated $I_O \leq I_O$ applied $\leq$ Rated I_O (see 4.5.1) 6,000 cycles.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IX of MIL-PRF-19500, and herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.

4.4.4.1 Group E inspection, table IX of MIL-PRF-19500.

Subgroup	Method	Condition	Sampling plan
E1	1056	0°C to 100°C, 100 cycles.	22 devices, c = 0
E2	1038 or 1049	Condition A; 1,000 hrs.	22 devices, c = 0
E3	2101	Photos of cross sections shall be submitted In the qualification report. Vendors shall Retain duplicate photos.	3 devices, c = 0
E4	3101	$R_{\theta JC}$ = 0.8°C/W maximum; I_M = 50 mA -- 250 mA; $I_H \geq$ rated I_O; t_H = 150 to 400 ms; t_{MD} = 50 to 300 µs	22 devices, c = 0
E5	1001	Hg = rated Hg (see 1.3), t = 60 s, while the test is being performed, I_R shall be monitored and shall not exceed 35 mA dc. T_C = 25°C.	22 devices, c = 0

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 DC intermittent operation life. A cycle shall consist of an "on" period, when power is applied suddenly, not gradually, to the device for the time necessary to achieve a delta case temperature of 85°C +15°C -5°C followed by an "off" period, when the power is suddenly removed, for cooling. Auxiliary (forced) cooling is permitted during the off period only. 30 s $\leq t_{Heating} \leq$ 60 s, $P = V_F \times I_F$ or $P = V_{FPK} \times I_{av}$ if using sine wave current. DC full wave current (or equivalent half sine wave current) shall be used for the power required during the on period. The test power, or current, shall be at least the free air rating. Within the time interval of 50 cycles before to 500 cycles after the termination of the test, the sample units shall be removed from the specified test conditions and allowed to reach room ambient conditions. Specified end-point measurements for qualification and quality conformance inspection shall be completed within 96 hours after removal of sample units from the specified test conditions. Additional readings may be taken at the discretion of the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical Inspection	2071					
Subgroup 2						
Forward voltage	4011	t_p < 8.3 ms, duty cycle ≤ 2 percent pulse i_f = 110 a(pk)	V_{F2}		1.4	V dc
Reverse current	4016	AC method V_r = Rated V_r (see 1.3)	i_r		3	mA (pk)
Reverse current	4016	DC method V_R = Rated V_R (see 1.3)	I_{R1}		10	µA dc
Subgroup 3						
High temperature operation:		T_C = 150°C				
Reverse current	4016	DC method V_R = Rated $V_{R(pk)}$ (see 1.3)	I_{R2}		1	mA dc
Subgroups 4 and 5						
Not applicable						
Subgroup 6 2/						
Forward voltage	4011	$I_F = i_{f(surge)}$; t_p = 800 µs	V_{F1}		2.5	V dc
Forward voltage	4011	$I_F = i_{f(surge)}$; t_p = 8.3 ms	V_{F1}		2.3	V dc
Subgroup 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

2/ V_{F1} shall be performed with either t_p = 800 µs or t_p = 8.3 ms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.

TABLE II. Groups B, C and E delta electrical end-point measurements. 2/ 3/ 4/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Thermal response	3101	See 4.3.2	ΔV_F			mV dc

1/ Devices which exceed the group A limits for this test shall be rejected.

2/ The delta electrical measurements for table VIb (JANTX and JANTXV) of MIL-PRF-19500 are as follows:

a. Subgroup 2, see table II herein, step 1.

3/ The delta electrical measurements for table VII of MIL-PRF-19500 are as follows:

a. Subgroup 2 see table II herein, step 1.

b. Subgroup 6, see table II herein, step 1.

4/ The delta electrical measurements for table IX of MIL-PRF-19500 are as follows:

a. Subgroup 1 see table II herein, step 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements should be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Issue of DODISS to be cited in the solicitation (see 2.1.1).

b. The lead finish as specified (see 3.3.1).

c. Type designation and quality assurance level.

c. Packaging requirements (see 5.1).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturer's List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI, SM
Navy – AS, CG, MC, OS
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5961-2137)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of Requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/297C	2. DOCUMENT DATE (YYMMDD) 990804

3. DOCUMENT TITLE
SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER, TYPES 1N1184, 1N1186, 1N1188, 1N1190, 1N3766, 1N3768, 1N1184R, 1N1186R, 1N1188R, 1N1190R, 1N3766R, 1N3768R, JAN, JANTX, AND JANTXV

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN FAX EMAIL	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. Point of contact: Alan Barone,	b. TELEPHONE Commercial 614-692-0510 DSN 850-0510 FAX 614-692-6939 EMAIL alan_barone@dscc.dla.mil
c. ADDRESS : Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad Street, Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman, Suite 2533, Fort Belvoir, VA 22060-6221 Telephone (703) 767-6888 DSN 427-68880

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T14:09Z
Check the source to verify that this is the current version before use.