INCH-POUND


MIL-DTL-55116/14B
22 March 2004
SUPERSEDING
MIL-C-55116/14A(CR)
2 May 1990

DETAIL SPECIFICATION SHEET

# CONNECTOR, RECEPTACLE, SIX PIN AUDIO, SOLDER CUP SPRING TERMINALS, WIRE STRAIN RELIEF, U-228 TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55116.

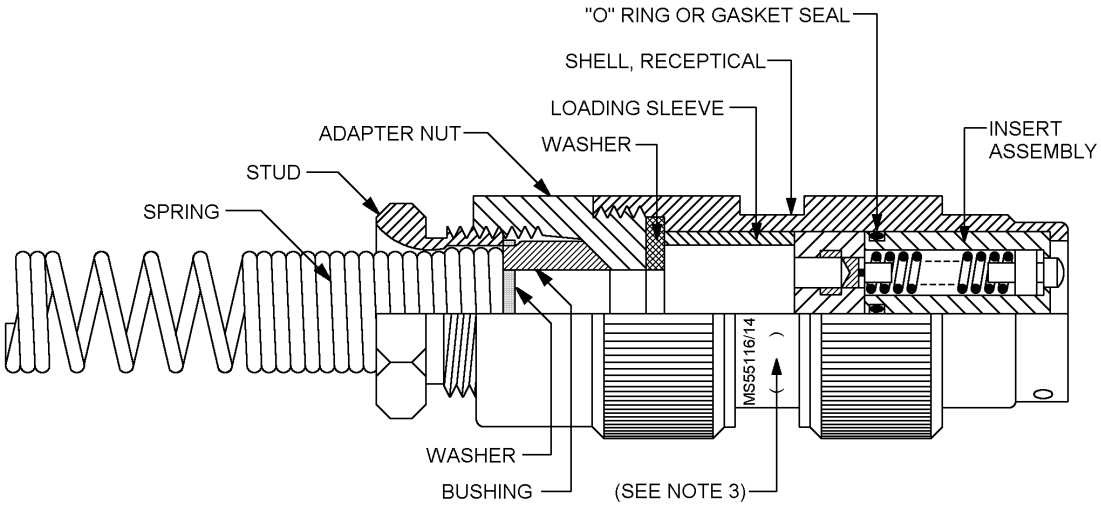


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Stamp or etch 1/16 gothic characters in accordance with MIL-STD-13231, group 1.

FIGURE 1. Connector, receptacle, five pin audio, U-228 type.

AMSC N/A FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:25Z
Check the source to verify that this is the current version before use.


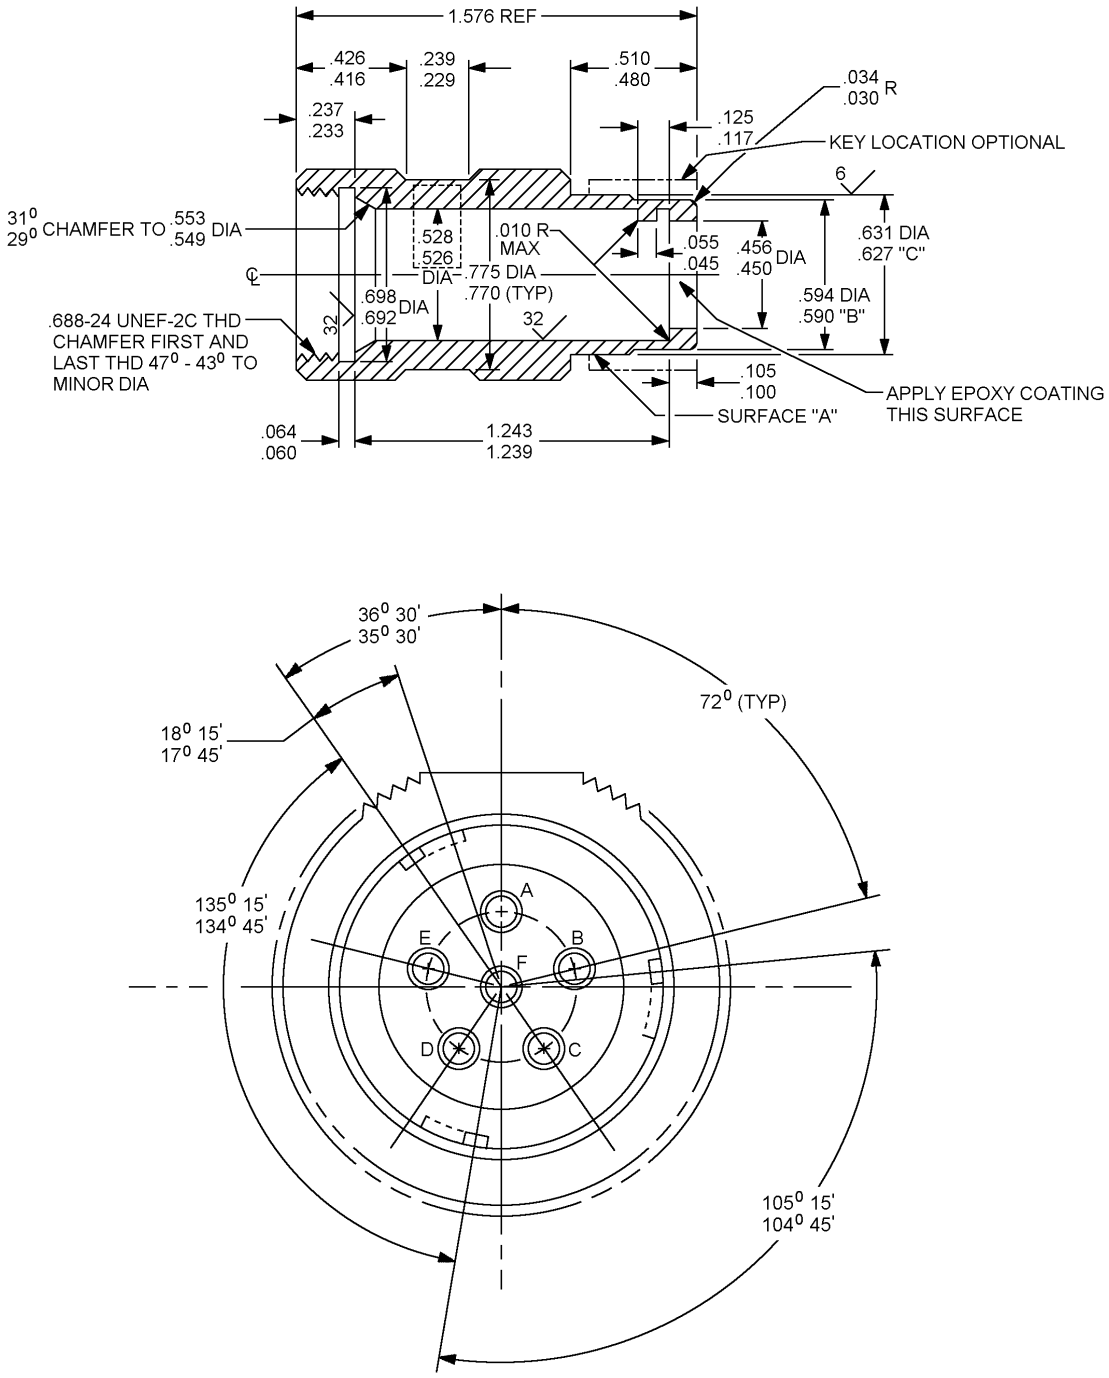



FIGURE 1. Connector, receptacle, five pin audio, U-228 type - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:25Z
Check the source to verify that this is the current version before use.

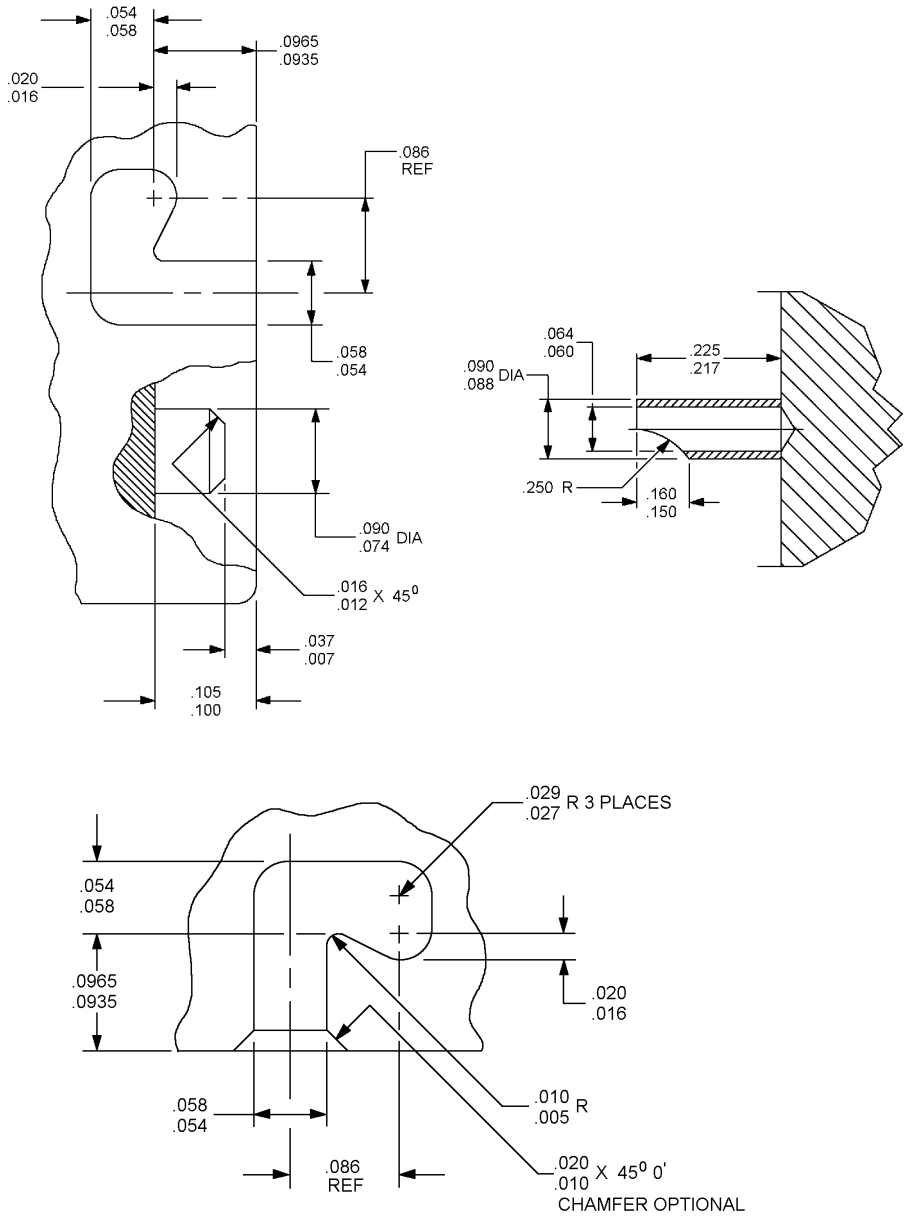


J-SLOT DETAIL

FIGURE 1. Connector, receptacle, six pin audio, U-228 type - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:25Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|
| .005 | .127 | .090 | 2.286 | .480 | 12.192 |
| .007 | .178 | .0935 | 2.375 | .510 | 12.954 |
| .010 | .254 | .0965 | 2.451 | .526 | 13.360 |
| .012 | .305 | .100 | 2.540 | .528 | 13.411 |
| .016 | .406 | .105 | 2.667 | .549 | 13.945 |
| .020 | .508 | .117 | 2.972 | .553 | 14.046 |
| .027 | .686 | .125 | 3.175 | .590 | 14.986 |
| .029 | .737 | .150 | 3.810 | .594 | 15.088 |
| .030 | .762 | .160 | 4.064 | .627 | 15.926 |
| .034 | .864 | .217 | 5.512 | .631 | 16.027 |
| .037 | .940 | .223 | 5.664 | .6875 | 17.463 |
| .045 | 1.143 | .229 | 5.817 | .692 | 17.577 |
| .054 | 1.372 | .233 | 5.418 | .698 | 17.729 |
| .055 | 1.397 | .237 | 6.020 | .770 | 19.558 |
| .058 | 1.473 | .239 | 6.071 | .775 | 19.685 |
| .060 | 1.524 | .250 | 6.350 | 1.239 | 31.471 |
| .064 | 1.626 | .416 | 10.566 | 1.243 | 31.572 |
| .074 | 1.880 | .426 | 10.820 | 1.576 | 40.030 |
| .086 | 2.184 | .450 | 11.430 | | |
| .088 | 2.235 | .458 | 11.633 | | |

FIGURE 1. Connector, receptacle, six pin audio, U-228 type - Continued.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Reference documents. In addition to MIL-DTL-55116, this document references the following:
MIL-STD-13231

CONCLUDING MATERIAL

Custodians:
Army - CR
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-A604-014)

Review activity:
Army – MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at http://www.dodssp.daps.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:25Z
Check the source to verify that this is the current version before use.