INCH-POUND

MIL-DTL-55302/155B
9 March 2005
SUPERSEDING
MIL-C-55302/155A
17 November 1988

DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, HOOD FOR PRINTED WIRING BOARDS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.

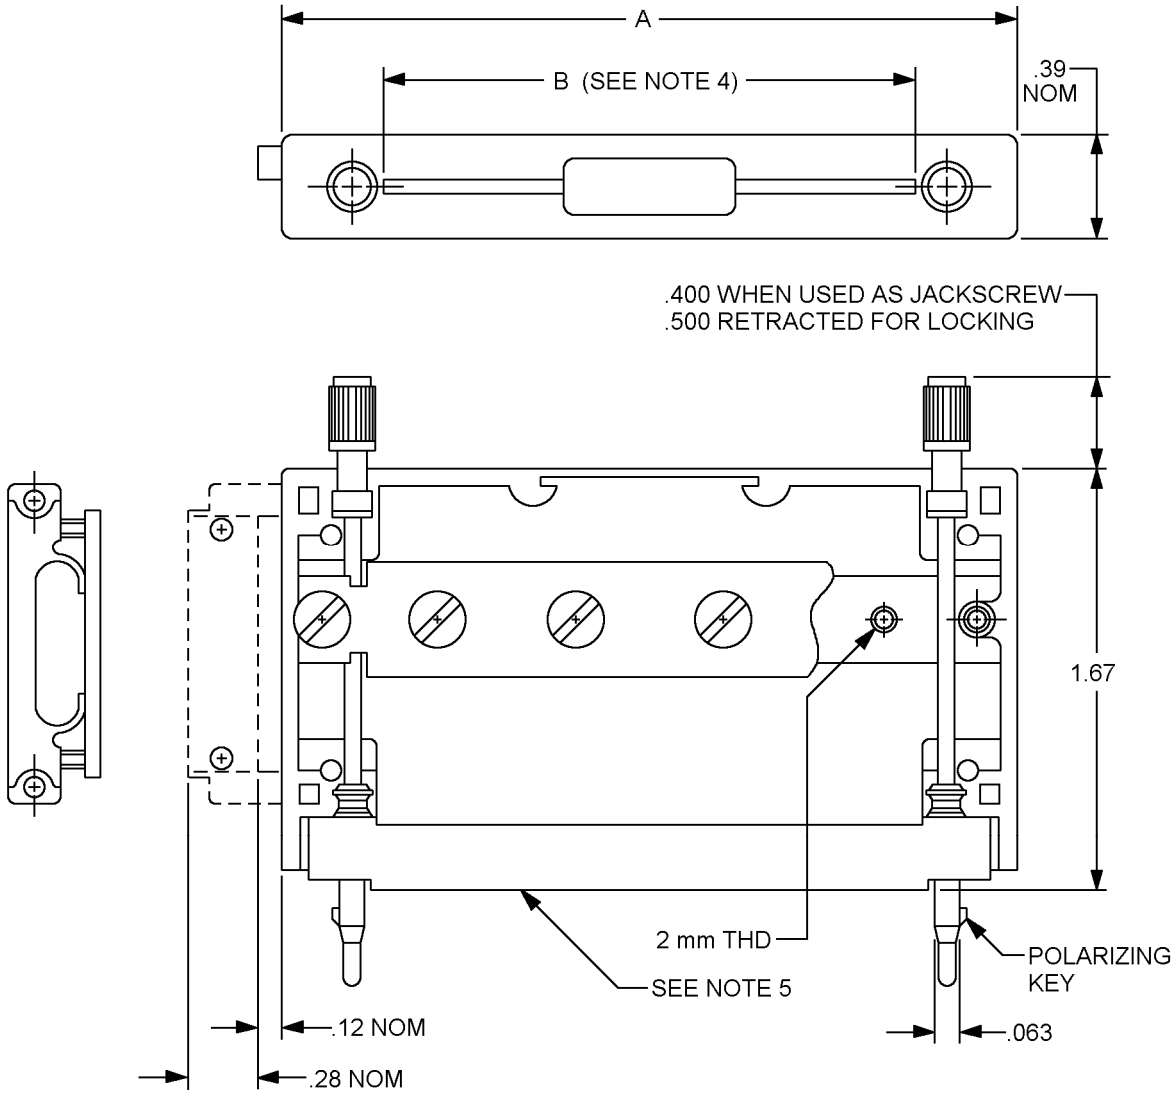


FIGURE 1. Hood.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and dimensions.

Dash number	Dimensions		Sub part (See fig. 2)
	A	B	
01	1.673	1.015	A B C
02	2.272	1.614	A B C
03	2.472	1.815	A B C
04	2.874	2.216	A B C
05	3.472	2.815	A B C
06	4.075	3.417	A B C

Inches	mm	Inches	mm
.063	1.60	1.815	46.10
.12	3.0	2.216	56.29
.28	7.1	2.272	57.71
.39	9.9	2.472	62.79
.400	10.16	2.815	71.50
.500	12.70	2.874	73.00
1.015	25.78	3.417	88.79
1.614	41.00	3.472	88.19
1.67	42.42	4.075	103.50
1.673	42.49		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .015 (0.38 mm).
4. Slot is provided for flexible, flat conductor, cable.
5. The connector is not included under this number.

FIGURE 1. Hood – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

TABLE II. Hood applications.

dash number	Corresponding connector
01	MIL-DTL-55302/140-17, /142-17, /144 and /149
02	MIL-DTL-55302/140-29, /142-29, /145 and /150
03	MIL DTL-55302/140-33, /142-33
04	MIL-DTL-55302/140-41, /142-41, /146 and /151
05	MIL-DTL-55302/140-53, /142-53, /147 and /152
06	MIL-DTL-55302/140-65, /142-65, /148 and /153

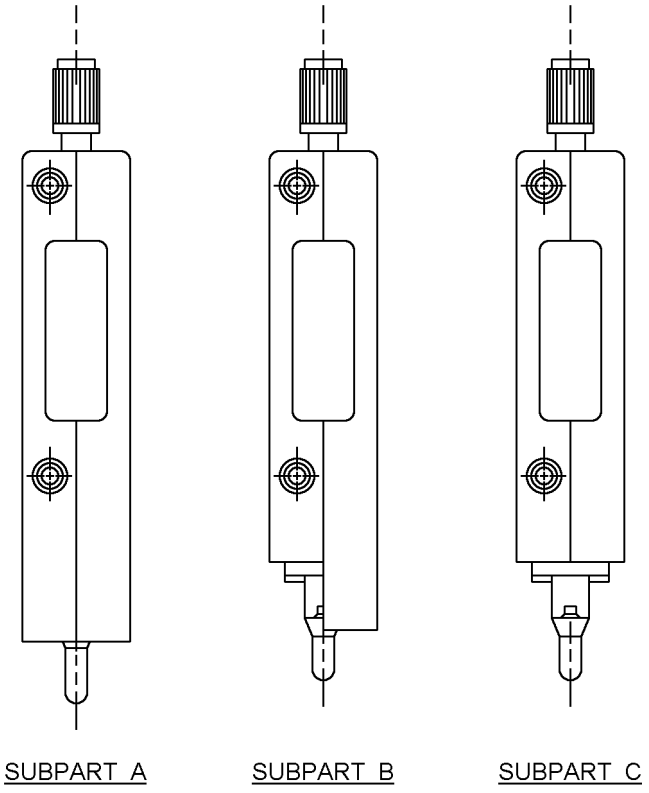


FIGURE 2. Shroud configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figures 1, 2 and table I.

Materials and finish:

Hood molding: Glass filled polycarbonate in accordance with ASTM D4203, color grey.

Cable clamp (external): Glass filled nylon in accordance with NASM3036, color grey.

Jackscrews: Stainless steel .305 in accordance with ASTM A276.

Mating hardware: In accordance with MIL-DTL-55302/154.

Corresponding parts: See table II.

Part or Identifying Number (PIN): M55302/155, (hood application) (shroud configuration) (cable entry).

PIN example: M55302/155-01 A S.

01 – denotes differences in hood lengths.

A – denotes different type shrouds.

T – denotes top entry cable.

S – denotes side entry cable.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/144	MIL-DTL-55302/147	MIL-DTL-55302/151	ASTM A276
MIL-DTL-55302/145	MIL-DTL-55302/148	MIL-DTL-55302/152	ASTM D4203
MIL-DTL-55302/146	MIL-DTL-55302/149	MIL-DTL-55302/153	NASM3036
	MIL-DTL-55302/150	MIL-DTL-55302/154	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Review activities:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4500-000)

Review activities:
Army – AR, AT, AV, CR4, MI
Navy – AS, MC, OS
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.