MILITARY SPECIFICATION

POWER SUPPLY, LOW VOLTAGE: 11746916

This Amendment forms a part of Military Specification MIL-P-62211B, dated 30 June 1981, and is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 10

FIGURE 2, Delete in its entirety and substitute:

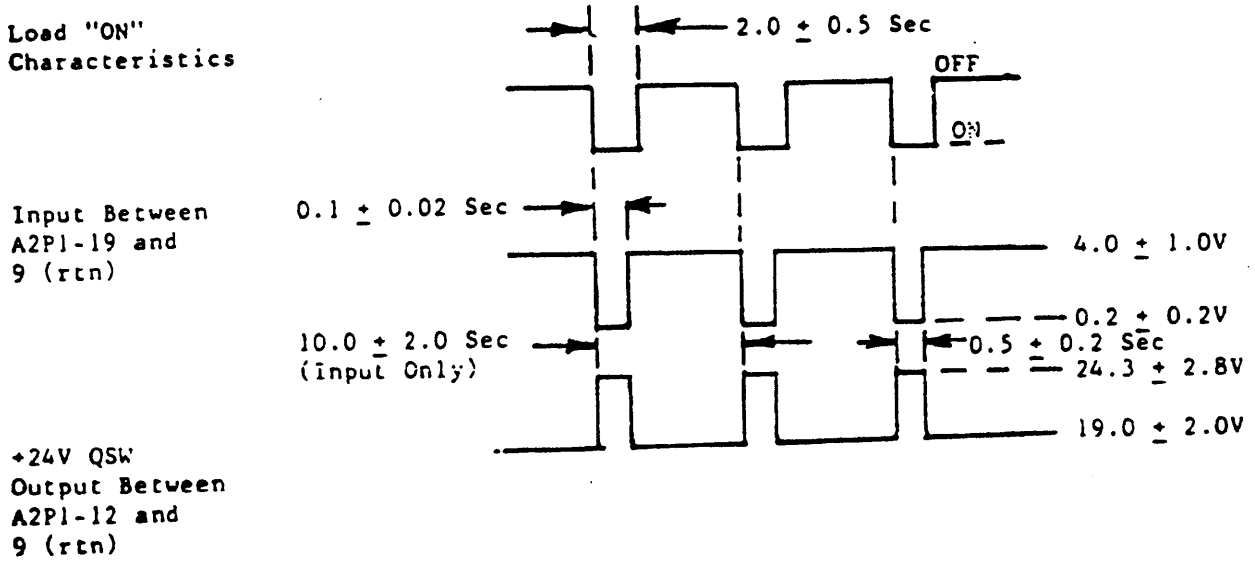


FIGURE 2. "Q" motor on-time limiting signal characteristic~

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

FIGURE 3, Delete in its entirety and substitute:

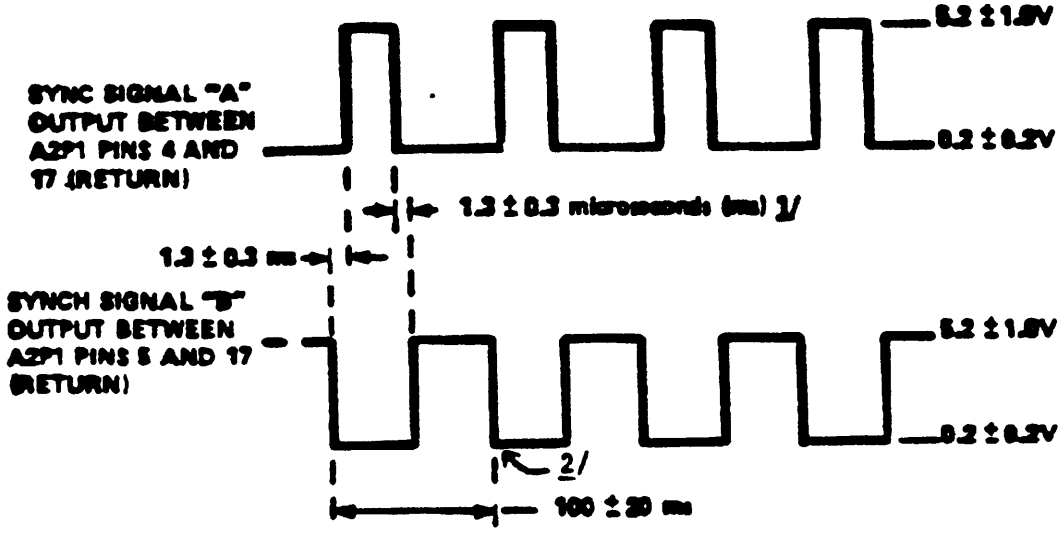


FIGURE 3. Sync SIG A and Sync SIG B output characteristics

1/ Time intervals are specified at the 50% point of the pulse amplitude
2/ Overshoot on leading and tailing edge is allowable (Neg shoot approx -2V at 6.2 microsec)

*The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment."

Custodian:
Army-AR

Preparing activity
Army-AR

(Project 1240-A928)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.