INCH-POUND

MIL-T-55155/20C


19 March 1990
SUPERSEDING
MIL-T-55155/20B
28 February 1983

MILITARY SPECIFICATION SHEET

TERMINALS, STUD (INSULATED), STYLE SE20

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-55155

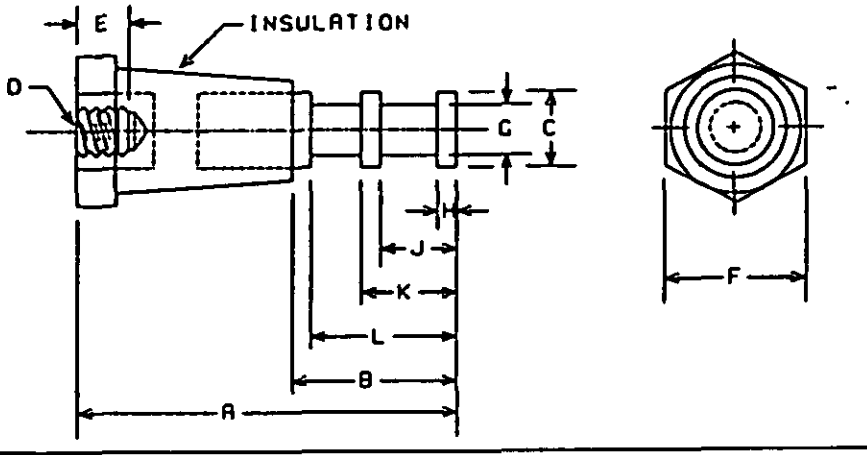

PART NUMBER 1/	DIMENSIONS										
	A	B	C	D (UNC-2B)	E (MIN)	F	G	H	J	K	L
MS5155/20--01	.718	.343	.140	.112-40	.156	.250	.062	.031	.125	.156	.304
MS5155/20--02	.937				.218						
MS5155/20--03	.390	.136	.072	.086-56	.078	.156	.047	.020	.068	.088	.116
MS5155/20--04	.937	.343	.140	.138-32	.218	.250	.062	.031	.125	.156	.304

FIGURE 1. CONFIGURATION AND DIMENSIONS.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .015 inch.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Insulation material: Diallyl phthalate.

Dielectric withstanding voltage: See table I.

TABLE I. Dielectric withstanding voltage.

Part 1/ number	Pressure	Volts, ac (rms) (min)
M55155/20--01	Atmospheric	3,000
M55155/20--03	Reduced barometric	1,250
M55155/20--02	Atmospheric	6,000
M55155/20--04	Reduced barometric	2,500

Pull: 8 pounds, min.

Torque: 3 ounce-inches, min.

Type of mounting: Tapped hole.

TABLE II. Substitutability data.

Part number in MIL-T-55155/20C 1/	Part number in MIL-T-55155/20B 2/
M55155/20--01	SE20-D01
M55155/20--02	SE20-D02
M55155/20--03	SE20-D03
M55155/20--04	SE20-D04

1/ The complete part number shall include the symbol for the insulation color (first dash) and symbol for the conductor material and finish (second dash).

2/ The complete number included the symbol for the insulation color.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:30Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI, AV
Navy -
Air Force -
DLA-GS

User activities:
Army - AT
Navy - MC, OS, AS
Air Force -

Preparing activity:
Army - ER

(Project 5940-1099-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.