
MILITARY SPECIFICATION SHEET

TERMINALS, FEEDTHRU (INSULATED),

STYLE FT03

The complete requirements for procuring the terminals described herein shall consist of this document and the latest issue of Specification MIL-T-55155.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

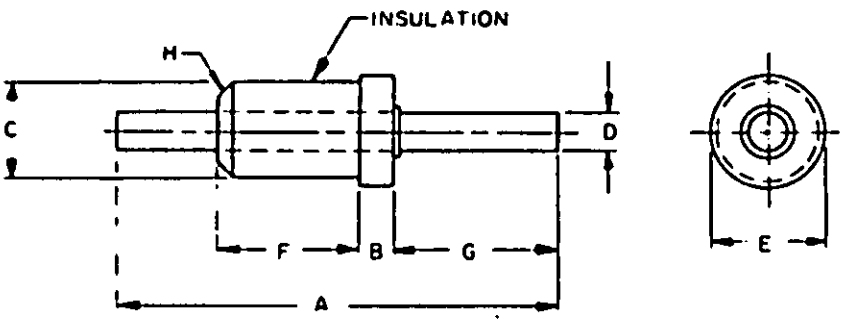

INCHES	MM
.002	.05
.015	.38
.031	.79
.040	1.02
.093	2.36
.100	2.54
.125	3.18
.148	3.76
.150	3.81
.165	4.19
.172	4.37
.187	4.75
.200	5.08
.210	5.33
.343	8.71
.375	9.53
.515	13.08
.675	17.15


Type designation	Dimensions							
	A	B	C +.002 -.000	D	E	F	G	H
FT03-B01	.375	.040	.148	.040	.172	.100	.125	.015 x 45°
FT03-B02	.515						.210	
FT03-B03	.675	.125	.165		.187	.150	.200	.031 x 45°
FT03-B04	.515	.040	.093		.125	.100	.210	.015 x 45°
FT03-B05	.343						.125	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015(.38 mm) on decimals and ±3° on angles.
4. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
5. Dash in type designation allows for different insulation colors in accordance with MIL-T-55155.
6. Terminals should have no less than .040(1.02 mm) of the insulated portion protruding beyond the mounting panel or board.

FIGURE 1.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:30Z
Check the source to verify that this is the current version before use.

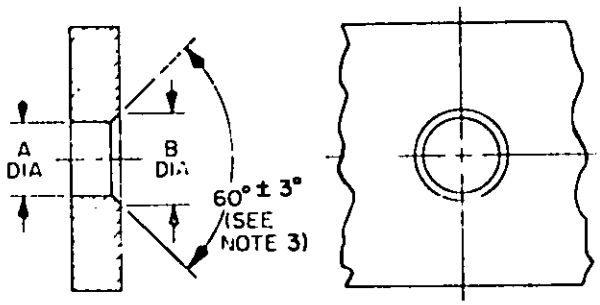

Type designation	Dimensions			
	A		B	
	MAX	MIN	MAX	MIN
FT03-B01 FT03-B02	.138	.134	.165	.160
FT03-B03	.154	.150	.180	.175
FT03-B04 FT03-B05	.088	.081	.115	.110

INCHES	MM
.081	2.06
.088	2.24
.110	2.79
.115	2.92
.134	3.40
.138	3.51
.150	3.81
.154	3.95
.160	4.06
.165	4.19
.175	4.45
.180	4.57

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. For panels less than 0.040(1.02 mm) thick, the countersink angle shall be 82°.

FIGURE 2. Test-mount holes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Insulation material: Polytetrafluoroethylene.

Test mounting: Terminals shall be mounted for testing in the hole specified on figure 2. The hole shall be made in 14 to 16 B & S gage sheet metal.

Dielectric withstanding voltage:

Type designation	Pressure	Volts ac (rms) (min)
FT03-B01 & FT03-B02	Atmospheric Reduced barometric	2,000 650
FT03-B03	Atmospheric Reduced barometric	2,500 650
FT03-B04 & FT03-B05	Atmospheric Reduced barometric	1,500 450

Pull: 8 pounds, min.

Torque: 3 ounce-inches, min.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MI, MU, SL, WC
Navy -
Air Force - 11, 80
DSA - GS

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS, SH, YD
Air Force -

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5940-0639)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-140/2351

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:30Z
Check the source to verify that this is the current version before use.