INCH-POUND

MIL-T-55164/15A
21 November 1988
SUPERSEDING
MIL-T-55164/15
30 June 1987

MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER STUD TYPE, CLASS 9TB

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the terminal board described herein shall consist of this specification and the latest issue of MIL-T-55164.

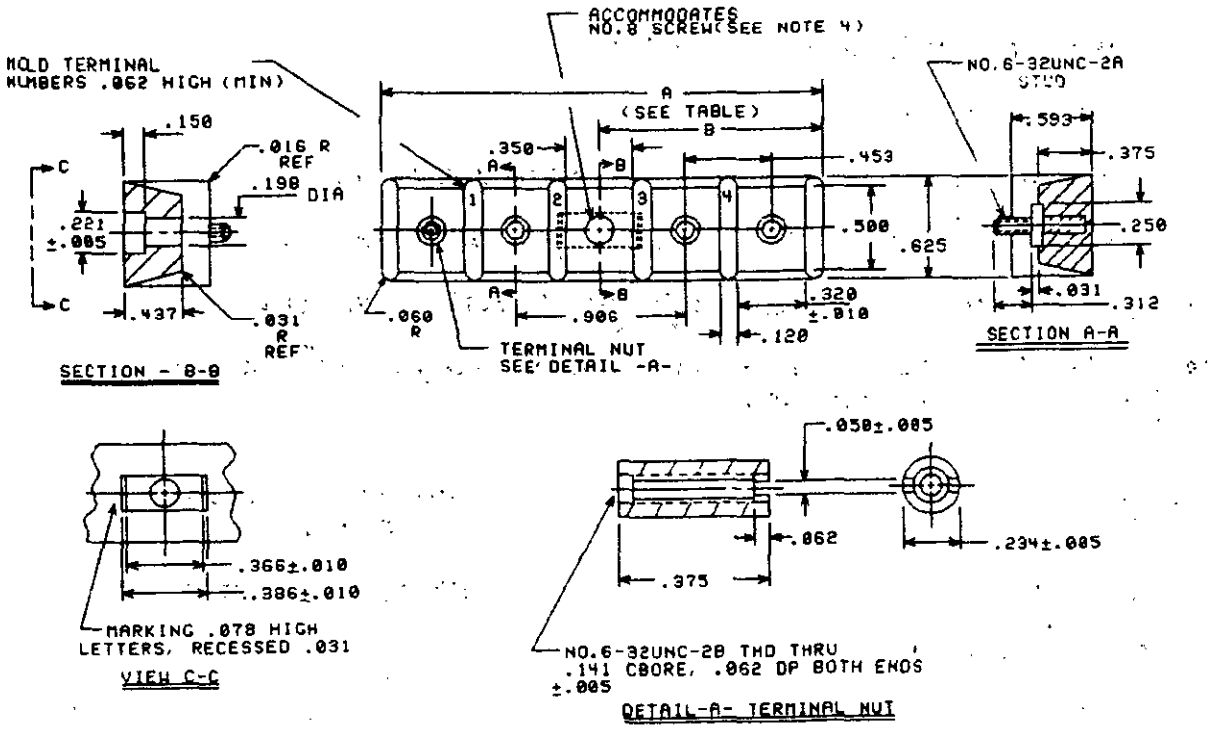


FIGURE 1. Dimensions and Configuration.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

NOTES;
1. Dimensions are in inches
2. Metric equivalents (to the nearest .01 mm.) are given for general information only.
3. Unless otherwise specified, tolerance is ±0.016 inch.
4. This terminal board is center mounted.
5. Studs shall be threaded to within 0.046 inch of the stud shoulder.

Type Designation	Dimensions		Recommended wire terminal lugs		Terminal Nuts
	A+.031, -.016	B+.031, -.062			
	inch (mm)	inch (mm)	MIL-T-16366	MS-17143	required
9TB2F	1.469 (37.31)	0.734 (18.64)		-4	2
9TB4F	2.375 (60.33)	1.188 (30.18)	L-81	-5	4
				-6	

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table.

Voltage rating (maximum): 300 volts.

Current rating: 35 amps.

Maximum number of terminal lugs for each stud: 4.

Plastic Material: Type GDI-30F or MAI-60 of MIL-M-14.

Dielectric withstanding test voltage: 1,600 volts rms.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army-ER
Navy-
Air Force-85

Preparing Activity:
Army-ER

(Project Number 5940-1017-07)

Review Activities:
Army-MI
Navy-
Air Force- 99
DLA - GS

User Activities:
Army-AV, AT, ME
Navy-MC, AS, SH
Air Force-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.