
MILITARY SPECIFICATION SHEET

TERMINAL BOARD, MOLDED, BARRIER,

STUD TYPE, CLASS 13TR

The complete requirements for procuring the terminal board described herein shall consist of this document and the issue in effect of Specification MIL-T-55164

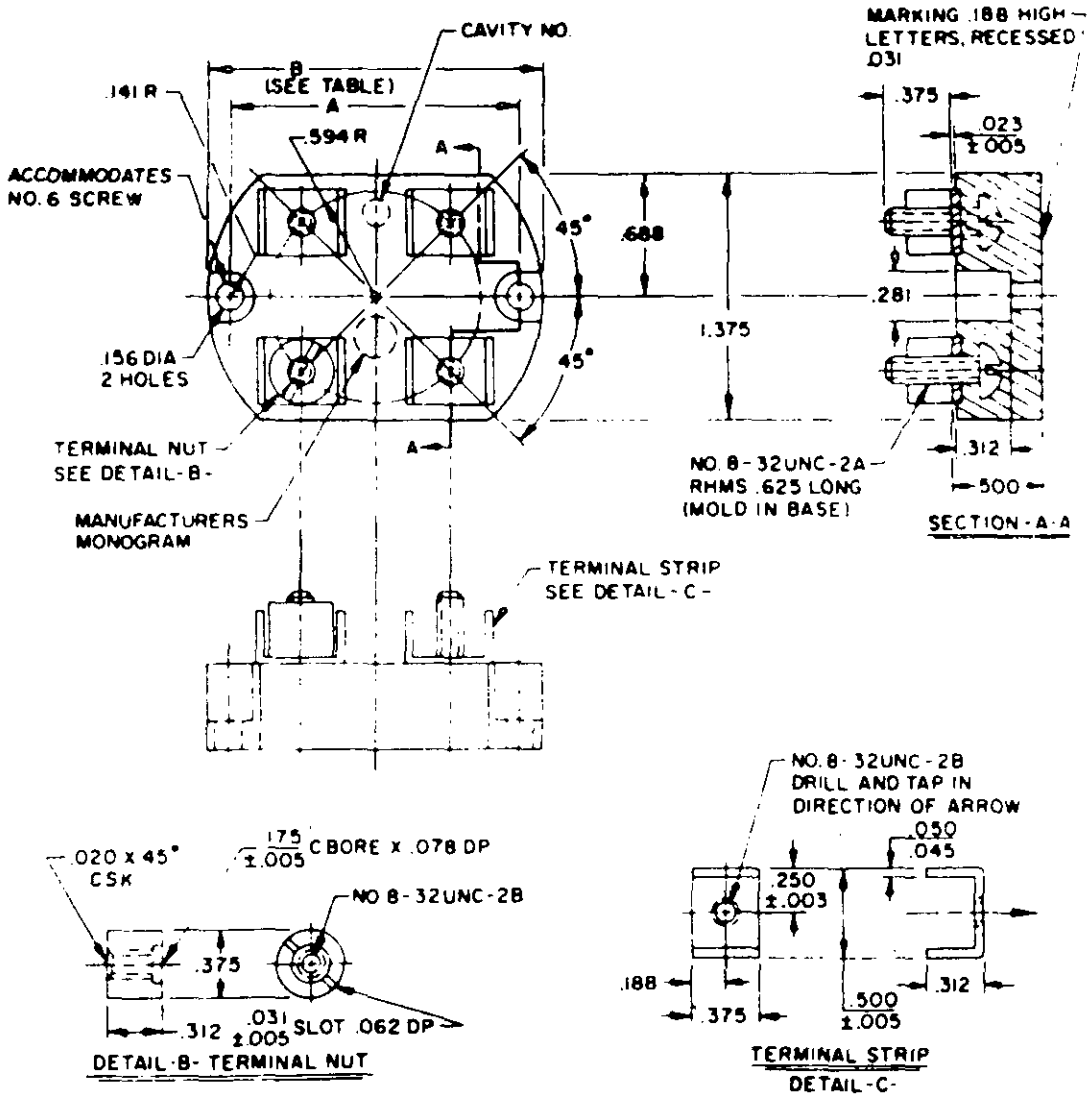

DETAIL-B- TERMINAL NUT


TERMINAL STRIP
DETAIL-C-

Figure continued on next page.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:32Z
Check the source to verify that this is the current version before use.

ALTERNATE DESIGN

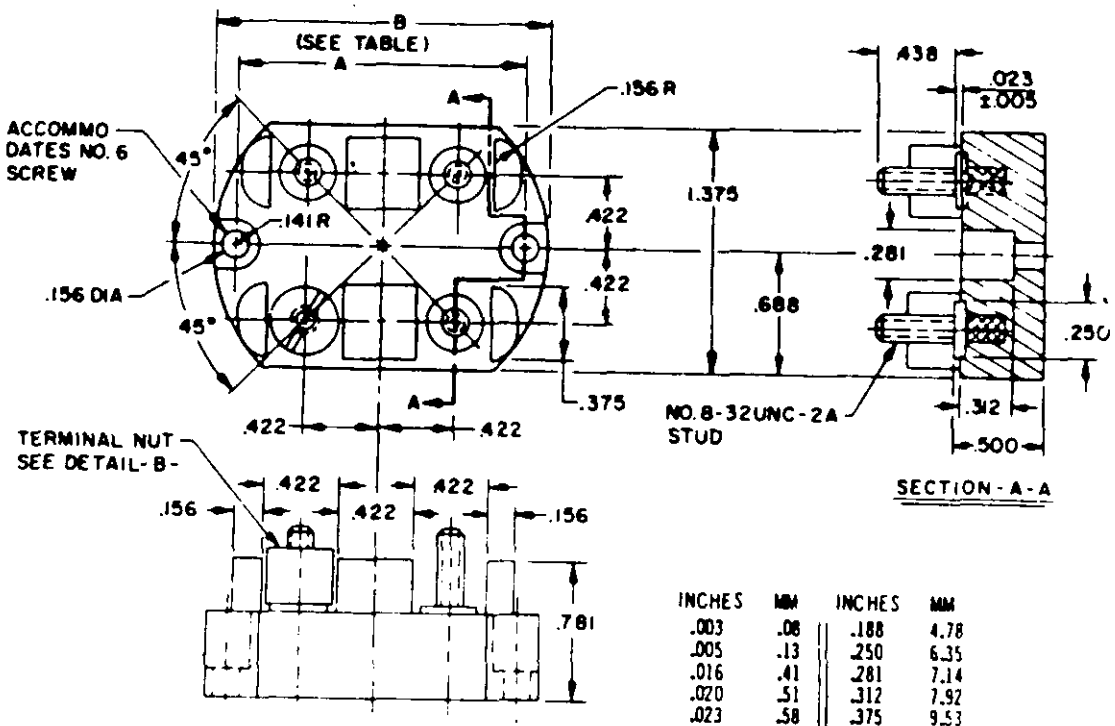

INCHES	MM	INCHES	MM
.003	.08	.188	4.78
.005	.13	.250	6.35
.016	.41	.281	7.14
.020	.51	.312	7.92
.023	.58	.375	9.53
.031	.79	.422	10.72
.045	1.14	.438	11.13
.050	1.27	.500	12.70
.062	1.57	.594	15.09
.078	1.98	.625	15.88
.141	3.58	.688	17.48
.156	3.96	.781	19.84
.175	4.45	1.375	34.93

NOTES
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .xxx±.016.

Figure continued.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:32Z
Check the source to verify that this is the current version before use.

Type designation	Dimensions				Recommended wire terminal lugs		Maximum number of terminal lugs for each stud	Terminal nuts required	Federal stock number
	A ±.016		B ±.016		MIL-E-16366	MS-17143			
	inch	(mm)	inch	(mm)		(dash no.)			FSN-5940
13TB4	1.625	(41.28)	1.875	(47.63)	L-80	-1 -2 -3		4	500-5382

REQUIREMENTS:

Dimensions and configuration: See figure and table.

Voltage rating (maximum): 150 volts.

Current rating: 15 amps

Plastic material: Type MAI-60 of MIL-M-14.

Dielectric withstanding test voltage: 1,500 volts rms.

Custodians:
Army - EL
Navy - SH
Air Force - 17

Review activities:
Army - EL, MU
Navy - SH, AS, OS
Air Force - 85

User activities:
Army - ME, AT, AV
Navy - MC, CG
Air Force - 11

Preparing activity:
Army - EL

(Project 5940-0409)

Code "C"

[illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T22:32Z
Check the source to verify that this is the current version before use.