FED. SUP CLASS
6140

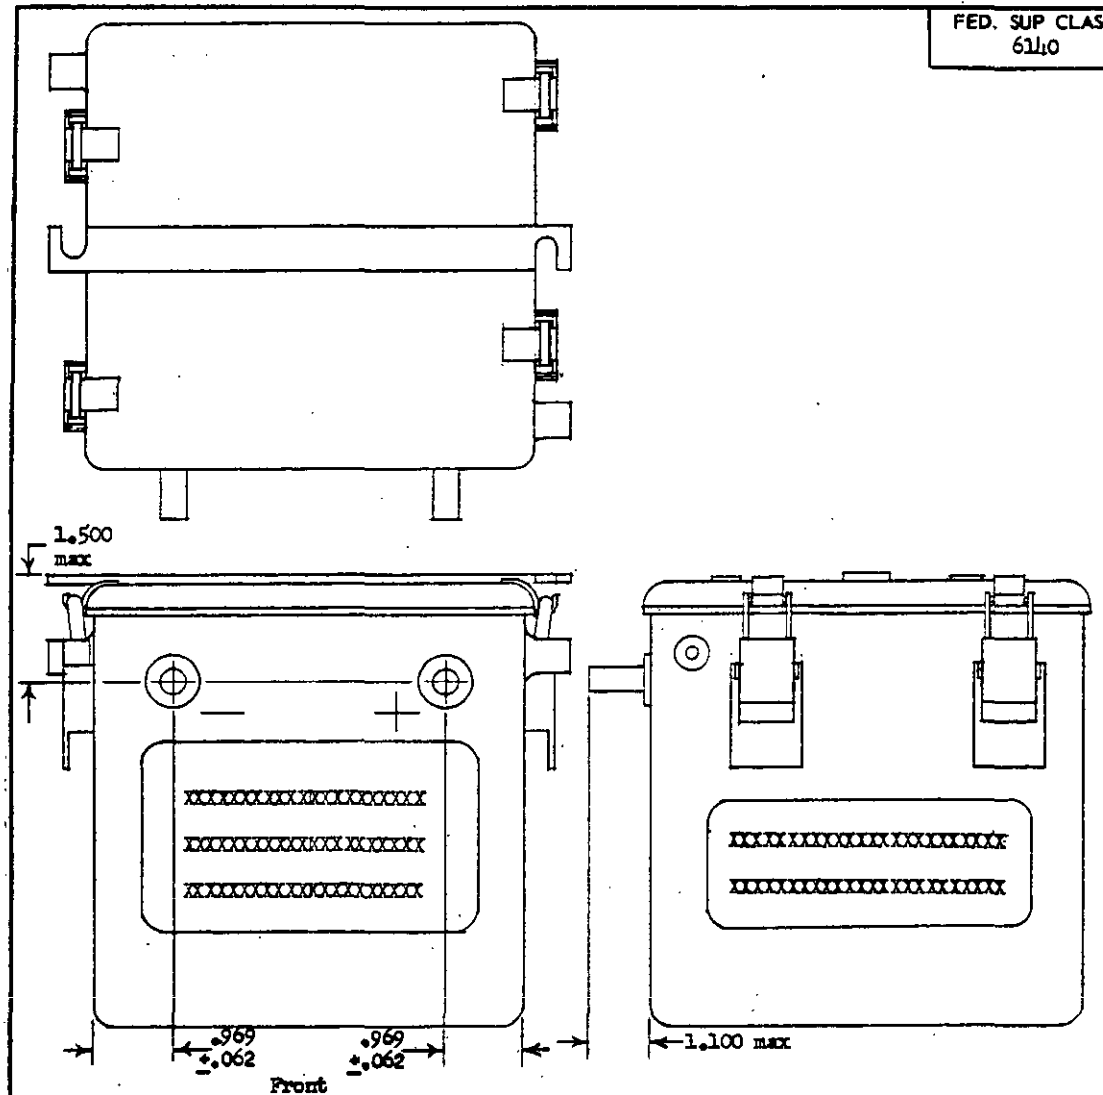

NOTES -

1. MS PART NUMBER - The MS part number of each battery shall be MS90449-1. This battery supersedes MS18045-4, -5, and -28, and MS25445-1 batteries.
2. DESIGN STANDARD - Each battery shall conform to MS18093 for size number 1 except as follows:
   A. Latches - There shall not be any latches on the front of the battery.
   B. Electric Connections - Each battery shall include as its electric connections two 5/16-inch diameter threaded posts as shown above instead of a receptacle. All dimensions shown above are in inches.
3. NOMINAL CAPACITY - The nominal capacity of each battery shall be 11 ampere-hours.
4. MAXIMUM WEIGHT - The weight of each battery filled with electrolyte shall not exceed 15 pounds in any state of charge.
5. SPECIFICATION - The batteries shall conform to requirements of MIL-B-8565 for maintainable, ventilated, threaded-post-connected, limited attitude, cradle-mounted, hook-held, light duty batteries with "design standard", wherever it occurs, replaced with "procurement standard."

APPROVED 23 Aug 66 REVISED (B) 9 Oct 68 (C) 1 Aug 1975

© CANCELLED AFTER 1 Aug 1975 NO SUPERSEDING STANDARD.

This standard has been approved by the Naval Air Systems Command, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	TITLE BATTERY, STORAGE, AIRCRAFT, 24-VOLT, 11 AMPERE-HOUR, LIGHT DUTY	MILITARY STANDARD MS90449(AS)
Procurement Specification MIL-B-8565	SUPERSEDES: MS18045 (in part), and MS25445	SHEET 1 OF 1

DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.