FED. SUP CLASS
5975

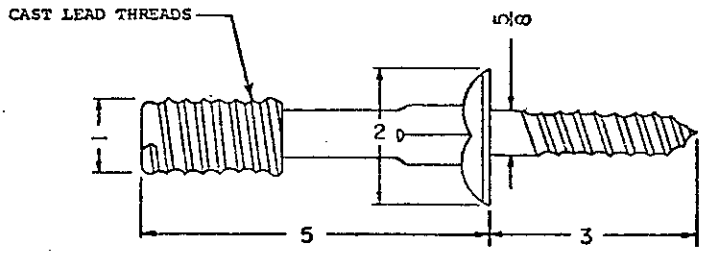

NOTES:

1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
2. PIN SHALL BE HOT ROLLED, OPEN-HEARTH, OR ELECTRIC FURNACE STEEL.
3. (A) FINISH SHALL BE HOT DIP GALVANIZED IN ACCORDANCE WITH ASTM A153.
4. SCREW THREAD SHALL BE UNC-2 PER NATIONAL BUREAU OF STANDARDS HANDBOOK H-28.
5. LEAD THREADS SHALL CONFORM TO EDISON ELECTRIC INSTITUTE STANDARD TDJ-17.

(B) CANCELED - For procurement of similar item use MIL-H-550533

APPROVED 6 November 1964 REVISED (A) 16 May 1972 (B) 30 July 1979

P.A. Y D Other Cust	TITLE PIN, INSULATOR LAG SCREW TYPE, LEAD INSULATOR THREAD	MILITARY STANDARD MS 90494 YD
Procurement Specification	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

		DATE
DRAWN BY	C. KURGES	3/28/73
TYPED BY		
CHECKED BY		

D39555

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:37Z
Check the source to verify that this is the current version before use.