FED. SUP CLASS
3820

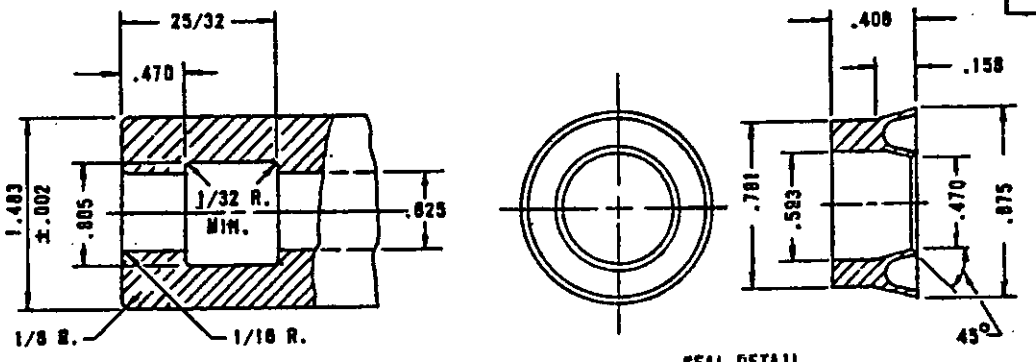

VIEW A

SEAL DETAIL

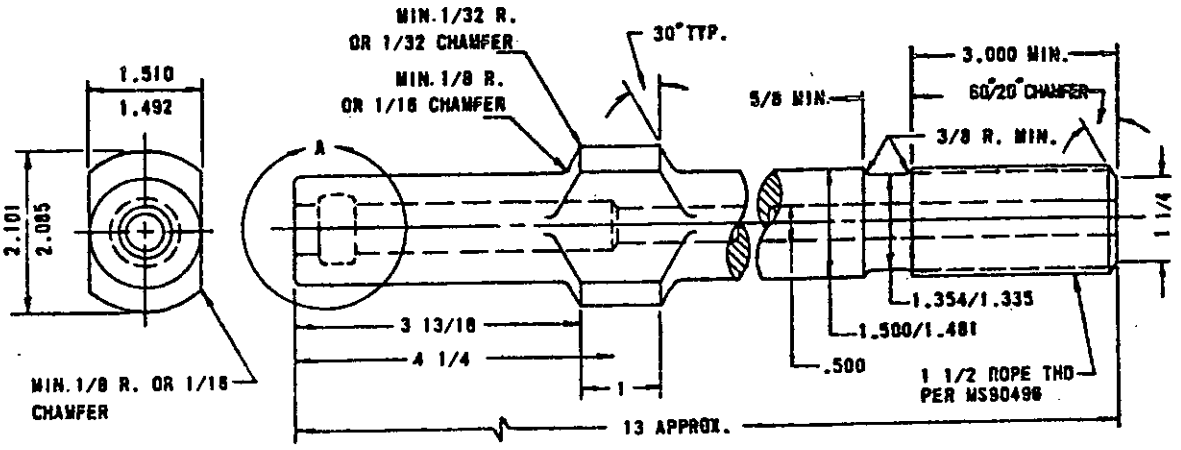

NOTES:

(A) 1. SHANK MATERIAL SHALL BE ALLOY [illegible] REQUIRED FOR TOUGHNESS.

2. ALL MACHINED SURFA[illegible]

3. END MUST BE [illegible] TURN[illegible]

[illegible] MUST BE [illegible] AND ALL

[illegible] SE SPECIFIED TOLERANCES [illegible] INAL ±.005, ANGULAR ±1°.

[illegible] NCH DIAMETER AIR OR WATER TUBE.

[illegible] STANDARD TAKES PRECEDENCE OVER PROCUREMENT [illegible] ED HEREIN.

[illegible] OCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF [illegible] ATION FOR BIDS.

(B) CANCELED AFTER 25 MARCH 1983

NO SUPERSEDING STANDARD.

(A) REDRAWN AND FULLY COORDINATED DOCUMENT

PROJECT NO. 3820-0078

P.A. NAVY-YD Other Cust ARMY-ME AIR FORCE-84	TITLE SHANK, ROCK DRILL ROD; FOR DRIFTER DRILLS	MILITARY STANDARD MS 90497	
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 28 APRIL 1966 REVISED (A) 29 August 1973 (B) 25 March 1983

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:37Z
Check the source to verify that this is the current version before use.