FED. SUP CLASS
5975

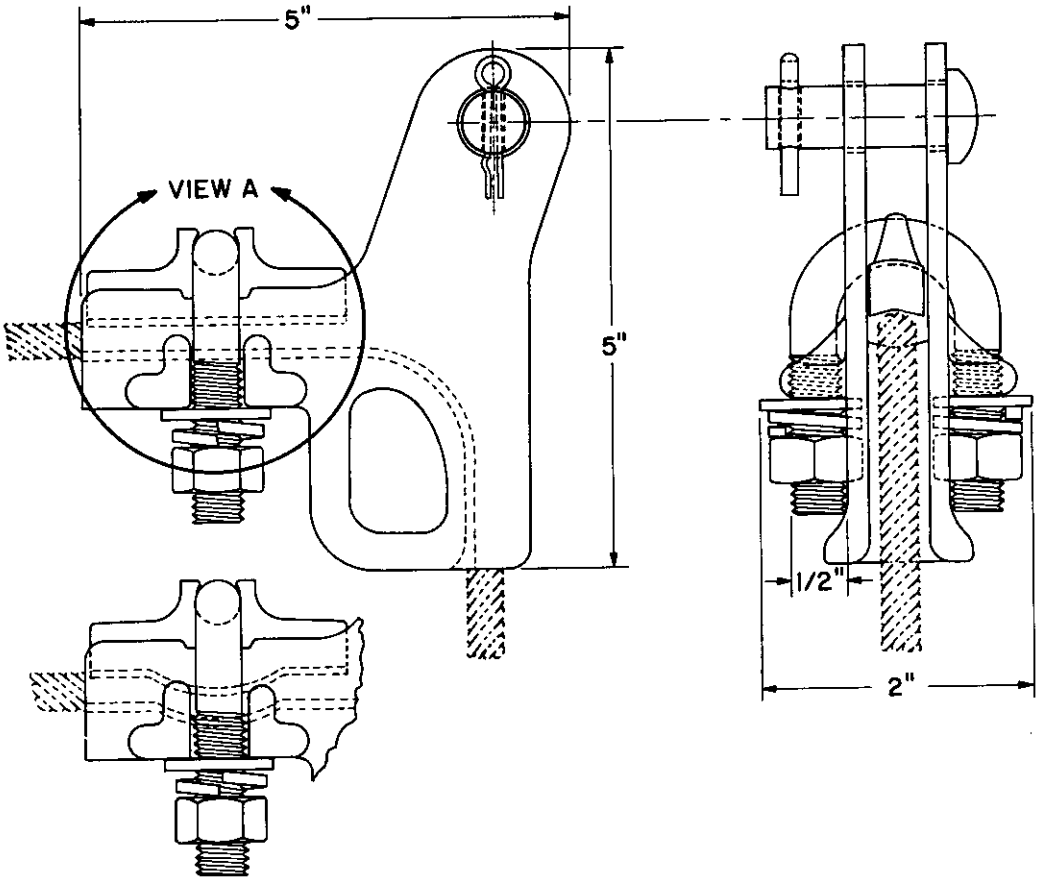

VIEW A
OPTIONAL DESIGN

(B) CANCELED - WITHOUT REPLACEMENT 16 July 1982

NOTES:

1. MATERIAL:
   (a) Body - Ductile iron casting in accordance with ASTM A 536, Grade 65-45-12, or pearlitic malleable iron casting in accordance with MIL-I-11444, hot dip galvanized.
   (b) U-Bolt - C1038 carbon steel, hot dip galvanized.
   (c) Cotter pin - Silicon bronze or stainless steel.
   (d) Clevis pin - C1018 steel, hot dip galvanized.
2. SCREW THREADS - Screw threads shall be in accordance with ANSI B 1.1.
3. CLAMPING ACTION - Clamping action shall accommodate No. 6 through 4/0 copper, and No. 4 through 3/0 ASCR.
4. PROTECTIVE COATING - Hot dip galvanizing shall be in accordance with ASTM A 153.
5. ULTIMATE STRENGTH - Ultimate strength shall be not less than 10,000 pounds.
6. DIMENSIONS - All dimensions are in inches. Tolerance for overall casting dimensions shall be ±1/4 inch.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.

(A) ENTIRE STANDARD REVISED

APPROVED 15 MAY 1970 REVISED (A) 21 Jan 1976 (B) 16 Jul 1982

P.A. YD Other Cust	TITLE CLAMP, DEAD END STRAIN	MILITARY STANDARD MS 90498 (YD)
PROCUREMENT SPECIFICATIONS MIL-H-55053	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROPOSED REVISION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:37Z
Check the source to verify that this is the current version before use.