INCH-POUND

MIL-F-5003D(ME)
30 January 1992
SUPERSEDING
MIL-F-5003C(ME)
18 OCTOBER 1973

MILITARY SPECIFICATION

FLOODLIGHT SET, ELECTRIC, TRIPOD-MOUNTED, FOUR 150-WATT PROJECTOR LAMPS

This specification is approved for use within the USA Belvoir Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a tripod-mounted electric floodlight set designed for use in areas where explosion proof type illumination equipment is not required (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 6230

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

W-C-596	- Connector, Electrical, Power, General Specification for.
W-L-661	- Light, Extension, Electrical.
QQ-P-416	- Plating, Cadmium (Electrodeposited).
TT-P-664	- Primer, Coating, Alkyd, Corrosion-Inhibiting, Lead and Chromate Free.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

MIL-T-152	- Treatment, Moisture- and Fungus-Resistant, of Communications, Electronic, and Associated Electrical Equipment.
MIL-V-173	- Varnish, Moisture- and-Fungus-Resistant (for Treatment of Communications, Electronic, and Associated Equipment).
MIL-T-704	- Treatment and Painting of Materiel.
MIL-C-3432	- Cables, (Power and Special Purpose) and Wire, Electrical (300 and 600 Volts).
MIL-C-12044	- Chests, Plywood.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U.S. Military Property.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1472	- Human Engineering Design Criteria for Military Systems, Equipment, and Facilities.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3953 - Strapping, Flat Steel and Seals.
D 4675 - Selection and Use of Flat Strapping Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

SOUTH COAST AIR QUALITY MANAGEMENT CONTROL DISTRICT

Rule 442 - Usage of Solvents.

(Application for copies should be addressed to the South Coast Air Quality Management Control District, 9150 East Flair Drive, El Monte, CA 91731.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The tripod-mounted, electric floodlight set (herein after referred to as "lamp assembly") shall be as shown in figures 1 through 5 and as specified herein.

3.1.1 Figures. No deviations from the prescribed dimensions or tolerances are permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the figures to insure correct fit, assembly, and operation of the lamp assembly. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production items shall be made available, upon request, for inspection by the contracting officer or the designated representative.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

3.3.1 Material deterioration prevention and control. The lamp assembly shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the lamp assembly may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the lamp assembly may be newly fabricated from recovered materials to the maximum extent practicable, provided the lamp assembly produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the lamp assembly.

3.4 Operation. The lamp assembly connected to a 120-volt, ac source, the lamp cords and extension light plugged into the outlet box, and the switches in the "on" position shall energize all the lamps. The lamp assembly shall show no signs of electrical or mechanical malfunction or damage as a result of the stand being erected to its maximum position and retracted to its carrying position.

3.5 Operational reliability. The lamp assembly shall withstand without malfunction, damage or permanent deformation 100 operational cycles when tested as specified in 4.5.2.3.

3.6 Electrical cable and connectors. The electrical cable shall conform to MIL-C-3432 as specified for low temperature, heat resistant cable (IS-L for insulation and JS-L for jacket). The plugs and receptacles shall conform to W-C-596. The connectors shall be molded and shall be vulcanized to the cable.

3.7 Lamp-head assembly. The lamp-head assembly shall be as shown in figure 1 and shall be provided with a positive means to lock the assembly to the mast. The lamp-head housing cover shall be removable to provide access to the switch and wiring. All electrical wiring shall be insulated from the metal components of the housing. The electrical cable shall be a 3-conductor, No. 18 AWG, light-duty cable, 12-1/2 feet plus 1/2 minus 0 feet long, terminated at one end with a 3-prong, polarized, twist-lock, molded connector plug for connecting to the electrical connector box. The cable grounding

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

conductor shall be grounded to the noncurrent carrying metal portion of the lamp-head assembly. The electrical switch for turning the lamps on and off shall be a flush-mounted, weatherproof type.

3.8 Stand. The stand shall consist of a base, a mast, and a crossarm.

3.8.1 Base. The base shall be as shown in figures 2 and 3 and shall have legs that can be folded as shown in figure 4 for shipment or transport and locked in place during use. A strap shall be fastened to the crossarm for holding the legs and crossarms when in the retracted position.

3.8.1.1 Pegs and casters. Three-inch pegs and casters with step-on wheel brakes shall be provided to support the stand assembly. They shall be interchangeable.

3.8.2 Mast. The mast shall be as shown in figure 2. The telescoping sections shall be provided with stops for preventing section from being detached from their mating tubes. T-type hand screws and shoes, or other comparable means, shall be provided for clamping the telescopic sections in position.

3.8.3 Crossarms. The crossarms shall be constructed to allow selective elevating and clamping of the arm along the lower section of the mast, and the arms shall be held in place by the same type of clamp that is used on the telescoping sections. Crossarms shall be fabricated to permit folding downward and parallel to the main tube for shipment and locking in place during use. One swivel lampholder shall be mounted on each crossarm. Each lampholder shall be equipped with 10 feet plus 1/2 minus 0 feet of 3-conductor, No. 18 AWG, light duty, electrical cable terminated at one end with a 3-prong, polarized, twist-lock, molded connector plug for connecting to the electrical connector box. The cable grounding conductor shall be grounded to the noncurrent carrying metal portion of the lamp-head assembly.

3.9 Swivel lampholder. The swivel lampholder shall be weatherproof and equipped with a wire guard as shown in figure 5. The electrical cord length shall be as specified in 3.7 and 3.8.3, as applicable (see figures 1 and 2). The socket in the lampholder shall not fail when a 60 inch-pound torque is applied to the lamp installed in the socket. The following information shall be permanently and legibly marked on the lamp-head adjacent to the switch: "CAUTION-TURN OFF BEFORE REPLACING LAMPS. USE PAR-38 LAMP WITH MEDIUM SCREW SKIRTED BASE."

3.10 Lamps. Lamps shall be furnished by the supplier as part of the complete assembly, and an equal number of replacement lamps shall also be furnished. The portable carrying chest (see 3.13) shall contain eight 120-V, 150-W, medium screw skirted base, PAR-38 project floodlamps and two standard 120-V, 100-W medium screw base lamps for extension light.

3.11 Electrical connector box. The electrical connector box shall be a weatherproof type containing six weatherproof outlets and three weatherproof

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

switches. One switch shall control the two lamphead outlets. The second switch shall control the two crossarm light outlets and the third switch shall control the two outlets for the extension lights. The outlet shall be a 2-pole, 3-wire locking, grounding type in accordance with W-C-596 and shall match the plugs of the lamphead, crossarm, and extension lights respectively. The outlets and switches shall be labeled indicating which lights they control. The outlets shall be spaced sufficiently permitting all six outlets to be used simultaneously. The connector box shall be provided with 100 feet plus 1/2 minus 0 feet of No. 12 AWG, medium-duty, 3-conductor electrical cable terminated at one end with a polarized, heavy-duty, outdoor-service-type connector plug having two parallel contacts and one ground connector contact. The cable grounding conductor shall be grounded to the mast.

3.12 Extension light. One portable extension light equipped with 50 feet of No. 18 AWG, medium-duty, 3-conductor electrical cable of the type specified in 3.6 shall be furnished. The portable extension shall be in accordance with W-L-661, Type III, Class 2 except for the type of cable and connector plug. The cable shall be terminated at one end with a 2-pole, 3-wire, locking, grounding, molded connector plug in accordance with W-C-596.

3.13 Carrying chest. A portable carrying chest, 104 inches long by 13.5 inches wide by 12 inches high, shall be provided for storing and transporting the lamp assembly and extension light. It shall be constructed in accordance with MIL-C-12044 of 3/8 inch thick plywood. Dimensional details fixing the location of the fixtures shall be determined by the contractor. Each lamp assembly, complete with replacement lamps (see 3.10), shall be packed in the carrying chest. Each component, part, or subassembly shall be secured within the carrying chest to prevent movement and breakage during handling and shipping. An 8- by 10-inch loading plan shall be provided.

3.14 Weight. The total weight of the lamp assembly, extension lamp, and carrying chest shall not exceed 42 pounds.

3.15 Human Factors Engineering. The lamp assembly shall comply with the criteria of MIL-STD-1472. Special emphasis shall be given, but not limited to, MIL-STD-1472, paragraph 4 (General Requirements), 5.4 (Controls), 5.5 (Labeling), 5.9 (Design for Maintainer), and 5.13 (Hazards and Safety), as applicable.

3.16 Fungus and moisture resistance. When specified (see 6.2), the electrical circuitry, including all components and connections, except as specified below, shall be treated for the effects of fungus growth and moisture as specified in MIL-T-152 with a varnish conforming to MIL-V-173, Composition I or II, as applicable (see 3.16.1), with 1 percent copper 8-quinolinolate (by weight) based on the nonvolatile content of the varnish.

(a) Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

(b) Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a dry-film thickness of not less than 1 mil to component or element surfaces. Surfaces shall be previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

3.16.1 Composition. Composition II shall be used only in the case when local air pollution regulations governing the application of varnish precludes the use of Composition I. When Composition II is used, the contractor shall provide evidence to the Government that the use of Composition II is required, and shall certify that the Composition II material complies with Rule 442, South Coast Air Quality Management Control District.

3.17 Finishes.

3.17.1 Mast, legs and crossarms. All exterior surfaces of the welded tubing made of other than corrosion-resistant metal shall be cadmium plated in accordance with QQ-P-416, class 1, type II or equivalent corrosion-resistant coating with equivalent thickness. Interior surfaces of the tubing made of other than corrosion resistant metal shall be coated with a corrosion-inhibiting primer in accordance with TT-P-664.

3.17.2 Unpainted surfaces. The sliding portions of the lamp assembly and the glass section of the floodlight housing shall be cleaned and treated, but shall not be painted.

3.17.3 Treatment and painting. The lamp assembly shall be treated and painted in accordance with MIL-T-704, color as specified (see 6.2).

3.18 Identification marking. Assemblies and parts shall be identified in accordance with MIL-STD-130, method optional.

3.19 Workmanship. The lamp assembly shall be free from defects such as chips, burrs, loose electrical connections, bent tubing and misaligned components.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Disassembly inspection. Failure of any examination or test of the first article model shall be cause for disassembly, in the presence of a Government representative, of the first article to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced figures in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected and shall be cause for rejection of the first article. Reassembly with accepted parts and retesting shall be the responsibility of the contractor.

4.1.3 Component and material inspection. The contractor is responsible for ensuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection. Unless otherwise specified (see 6.2), two first article lamp assemblies shall be examined as specified in 4.5.1 and subjected to the tests marked "X" in column 1 of table I. Presence of one or more defects or failure of any test shall be cause for rejection. Rejection of the first article shall be cause for performing the inspection specified in 4.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

TABLE I. Test schedule.

First article	Quality conformance		Test	Test paragraph	Requirement paragraph
	Individual	Sample			
1	2	3	4	5	6
X	X	-	Operation	4.5.2.2	3.4
X	-	X	Operation		
			Reliability	4.5.2.3	3.5,3.9
X	-	-	Rainfall	4.5.2.4	3.7,3.9
					3.10

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105. Sample size shall be determined by using MIL-STD-105, table I and table IIa. A lot shall be accepted when zero defects are found and rejected when one or more defects are found.

4.4.2 Examination. Sample selected in accordance with 4.4.1 shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.3 Tests.

4.4.3.1 Individual. Each lamp assembly shall be subjected to the test marked "X" in column 2 of table I. Failure of the test shall be cause for rejection.

4.4.3.2 Samples. Samples selected in accordance with 4.4.1 shall be subjected to the test marked "X" in column 3 of table I. Failure of the test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The lamp assembly shall be examined as specified herein for the following defects:

101. Lamp assembly not as specified in figures 1 through 5 (see 3.1).
102. Materials not as specified (see 3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

4.5.1 Delete in its entirety and substitute the following:

103. Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration of the applicable operating and storage environment (see 3.3.1).
104. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other (see 3.3.1.1).
105. Contractor does not have documentation available for identification of materials, material finishes, or treatments (see 3.3.1.2).
106. Used, rebuilt or remanufactured components, pieces, and parts incorporated in the lamp assembly (see 3.3.2).
107. Components not as specified (see 3.6, 3.7, 3.8, 3.9, 3.10, 3.11, 3.12, and 3.13).
108. Weight not as specified (see 3.14).
109. Human Factors Engineering not as specified (see 3.15).
110. Fungus and moisture resistance treatment not as specified (see 3.16).
111. Finishes not as specified (see 3.17).
112. Identification marking not as specified (see 3.18).
113. Workmanship not as specified (see 3.19).

4.5.2 Tests.

4.5.2.1 Test conditions. Unless otherwise specified herein, tests may be performed without shelter and at the climatic conditions existing at the place of test. The lamp assembly shall operate as specified herein without maintenance other than the contractor's recommended normal scheduled maintenance as established by a maintenance schedule prepared and submitted by the contractor prior to test.

4.5.2.2 Operation. Connect the lamp assembly to a 120-volt, ac power source; plug the lamp cords and extension light into the outlet box and place the switches in the "on" position. Erect the mast assembly from its retracted position to its maximum height and lock each mast section rigid and straight. Actuate the switches on the control box from the "off" to the "on" position five times for switch control of lamp operation. Nonoperation of the lamps (with exception of normal filament burn-out) or malfunction of either electrical switch or parts of the mast shall constitute failure of this test.

4.5.2.3 Operational reliability. Test the lamp assembly in accordance with 4.5.2.2 except that the mast shall be extended and collapsed 100 times and the electrical switches shall be actuated from the "off" to the "on" position 100 times. Apply 60 inch-pounds of torque to a lamp installed in one of the sockets. Nonconformance to 3.5 or 3.9 shall constitute failure of this test.

4.5.2.4 Rainfall. With the mast erected to normal operation position and the projector lamps operating, subject the lamp assembly to a simulated rainfall of 4 inches plus or minus 1 inch per hour for 1 hour. After exposure to the rain, examine the lamp assembly. Evidence of water penetration into the electrical components or malfunctioning of the lamps shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of packaging.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. One or more defects shall be cause for rejection.

114.	Shipping containers not as specified for levels A, B or C.
115.	Strapping not as specified for levels A or B.
116.	Marking missing, illegible, incorrect or incomplete for levels A, B or C.

5. PACKAGING

5.1 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.1.1 Level A. The carrying case, containing the components comprising a complete floodlight set secured in place as specified in 3.13, shall be packed in a close-fitting box conforming to PPP-B-601, overseas type, grade B, style I. Box closure shall be in accordance with the appendix to the box specification. Strapping shall conform to ASTM D 3953, type 1 or 2, zinc-coated, size as applicable and ASTM D 4675.

5.1.2 Level B. The carrying case, containing the components comprising a complete floodlight set secured in place as specified in 3.13, shall be packed in a close-fitting box conforming to PPP-B-636, V3c, style optional. Box closure shall be in accordance with the appendix to the box specification. Strapping shall be as specified for level A in 5.1.1, except it may be zinc-coated.

5.1.3 Level C. The carrying case, containing the components comprising a complete floodlight set secured in place as specified in 3.13, shall be packed as specified for level B except the box shall be domestic class.

5.2 Marking (see 6.4). In addition to any special marking specified in the contract or purchase order (see 6.2), marking shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil --- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The lamp assembly covered by this specification is intended to illuminate aircraft for maintenance operations in exposed locations under all weather conditions.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When first article is not required for inspection and approval (see 3.2, 4.3, and 6.3).
d. When fungus and moisture resistance treatment is required (see 3.14).
e. Color of paint to be specified (see 3.15.3).
f. Level of packing required (see 5.1).
g. Any special marking (see 5.2).

6.3 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more lamp assemblies. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Levels of preservation. Levels of preservation have not been included as preservation is not required. For the purpose of marking, the boxes shall be A/A, A/B or A/C.

6.5 Subject term (key word) listing.

Flood lamps
Floodlight
Floodlight set
Lamps
Lamp assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify the changes with respect to the previous issue due to the extensiveness of the change.


Custodian:
Army - ME

Review activities:
Army - SM, MD
DLA - GS

Preparing activity:
Army - ME

Project 6230-1021

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

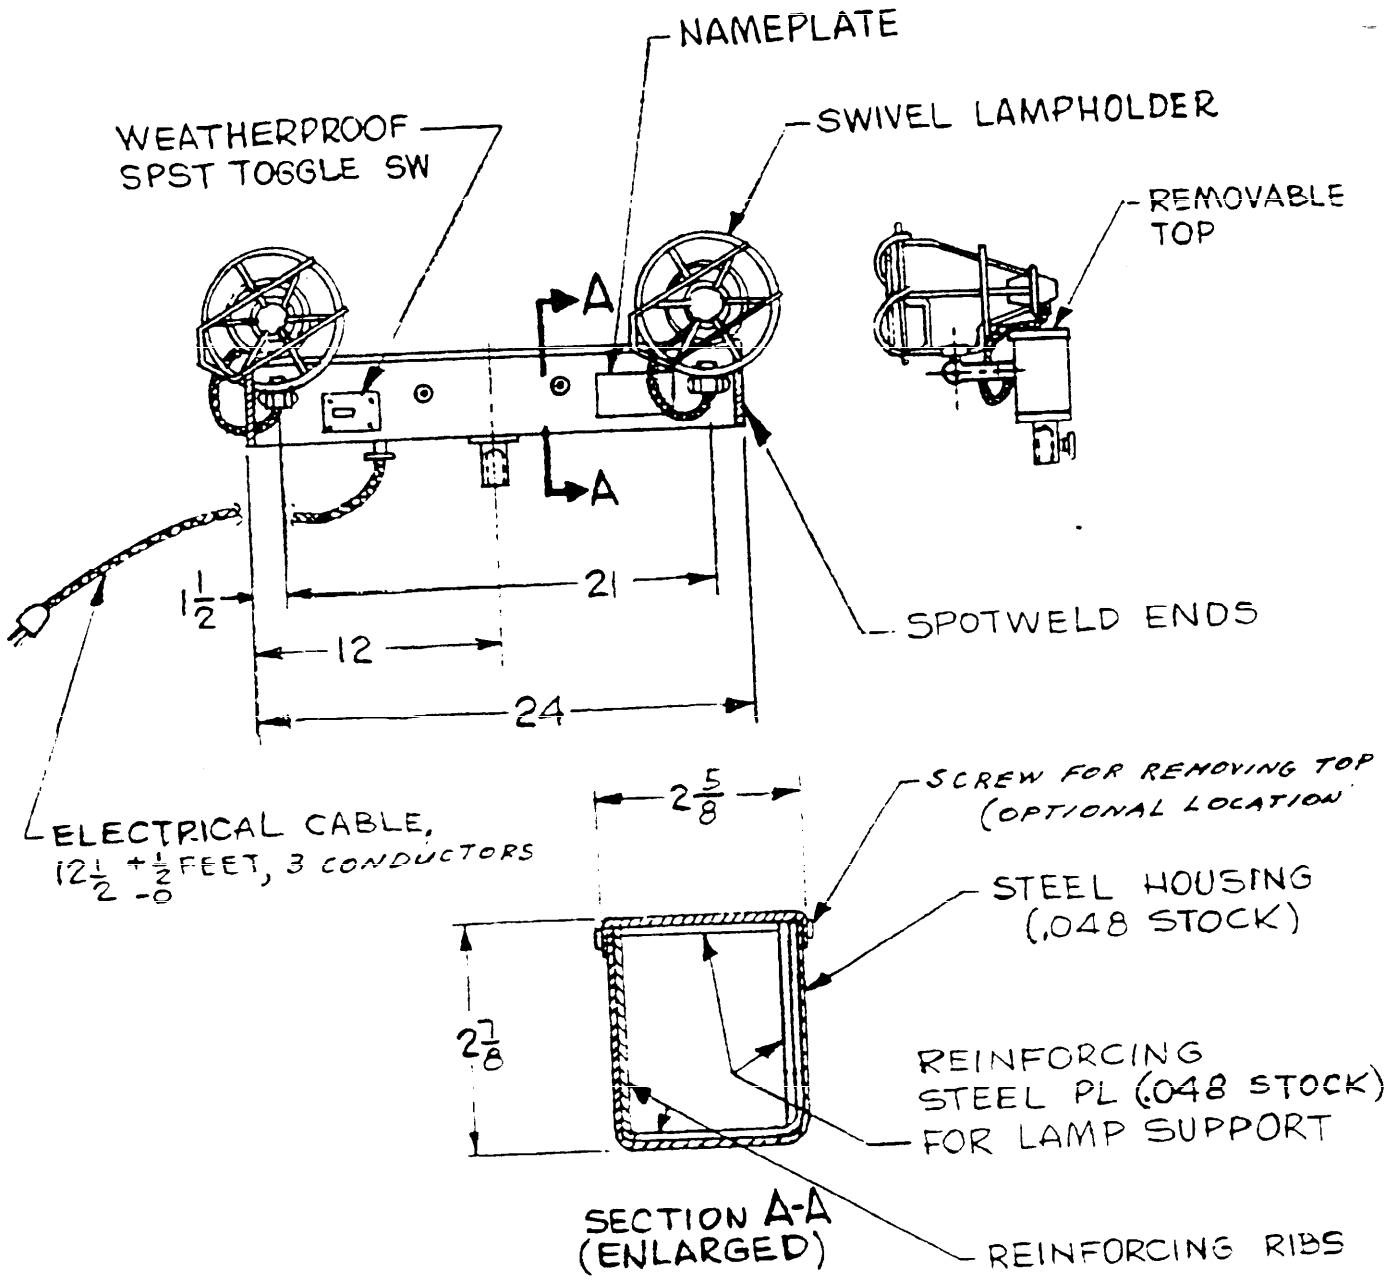


NOTES:

1. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
2. TOLERANCES: ± 1/16
3. SCALE: NONE

FIGURE 1.
LAMP-HEAD ASSEMBLY

X-2472B


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

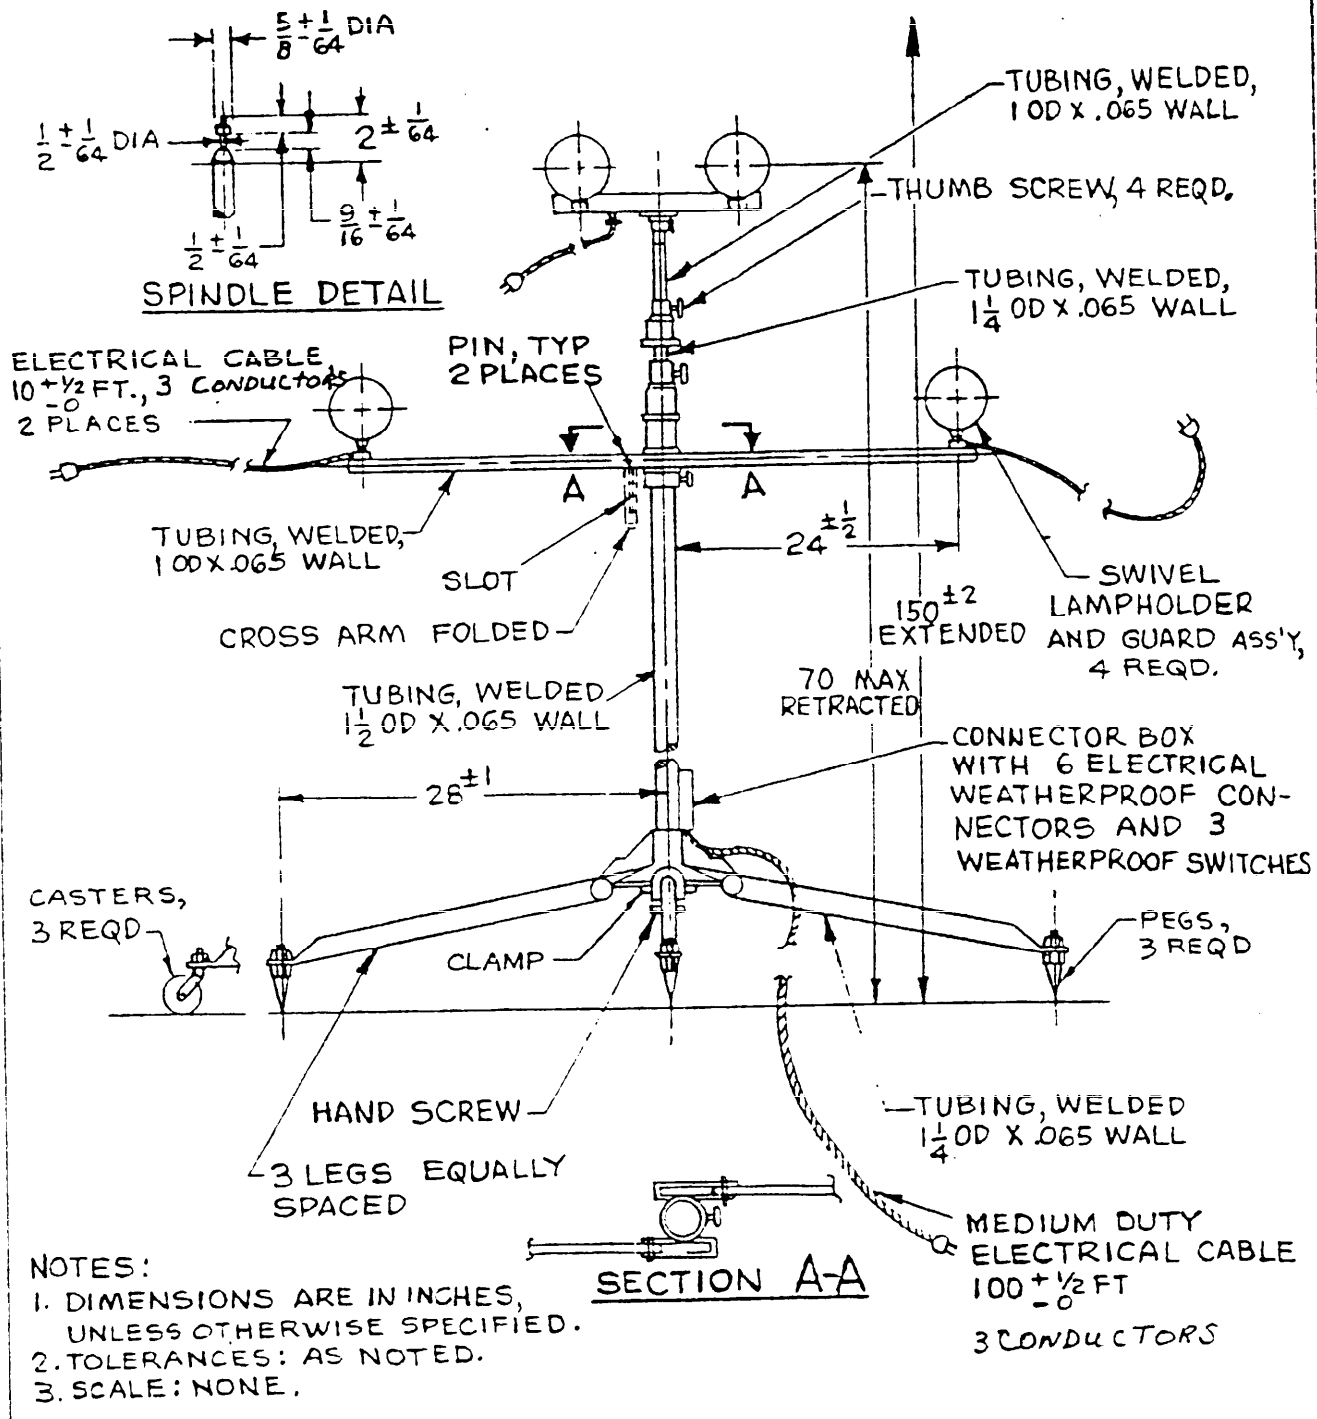

NOTES:
1. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED.
2. TOLERANCES: AS NOTED.
3. SCALE: NONE.

FIGURE 2.
FLOODLIGHT LAMP ASSEMBLY
X-2473A

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:59Z
Check the source to verify that this is the current version before use.

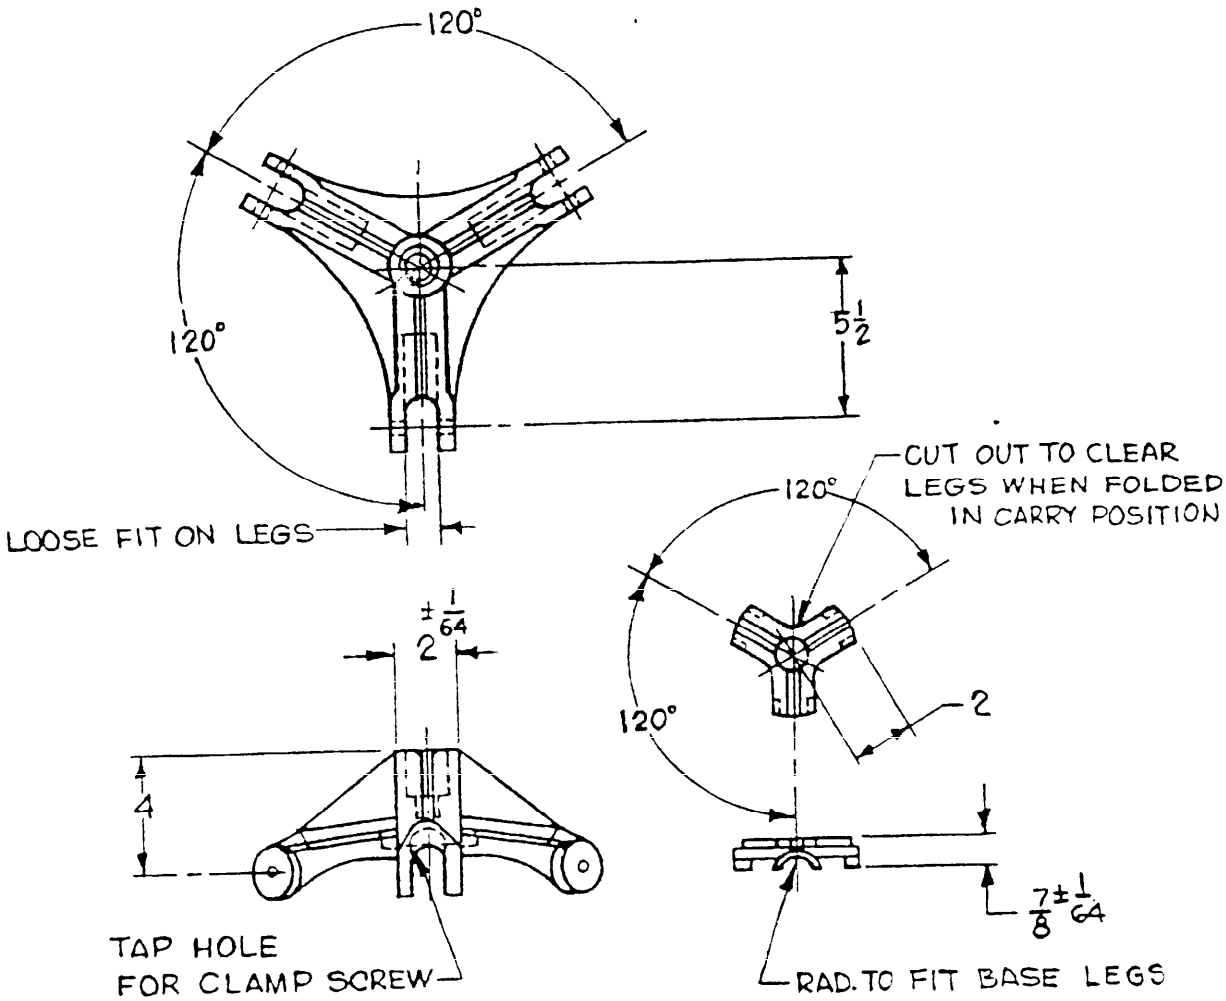

NOTES:


1. DIMENSIONS ARE IN INCHES.
2. TOLERANCES: FRACTIONS ± 1/8.
   ANGLES ± 1°.
3. SCALE: NONE.
4. MATL: MALLEABLE IRON CASTING.

FIGURE 3.

BASE CASTING AND LEG CLAMP.

X-2474

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:59Z
Check the source to verify that this is the current version before use.

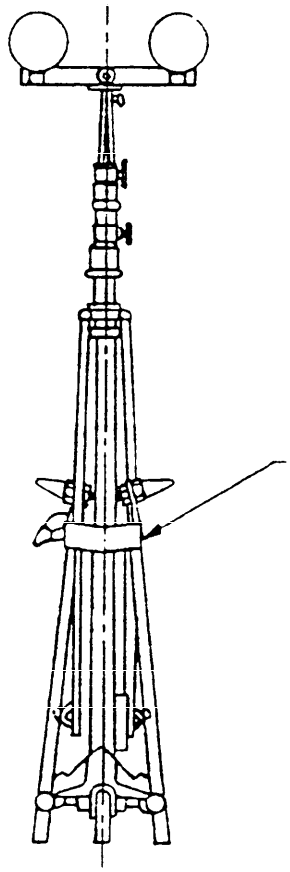


NOTES;
1. DIMENSIONS ARE IN INCHES.
2. SCALE : NONE.

FIGURE 4.
MAST IN CARRYING POSITION.

X-2475A

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:59Z
Check the source to verify that this is the current version before use.

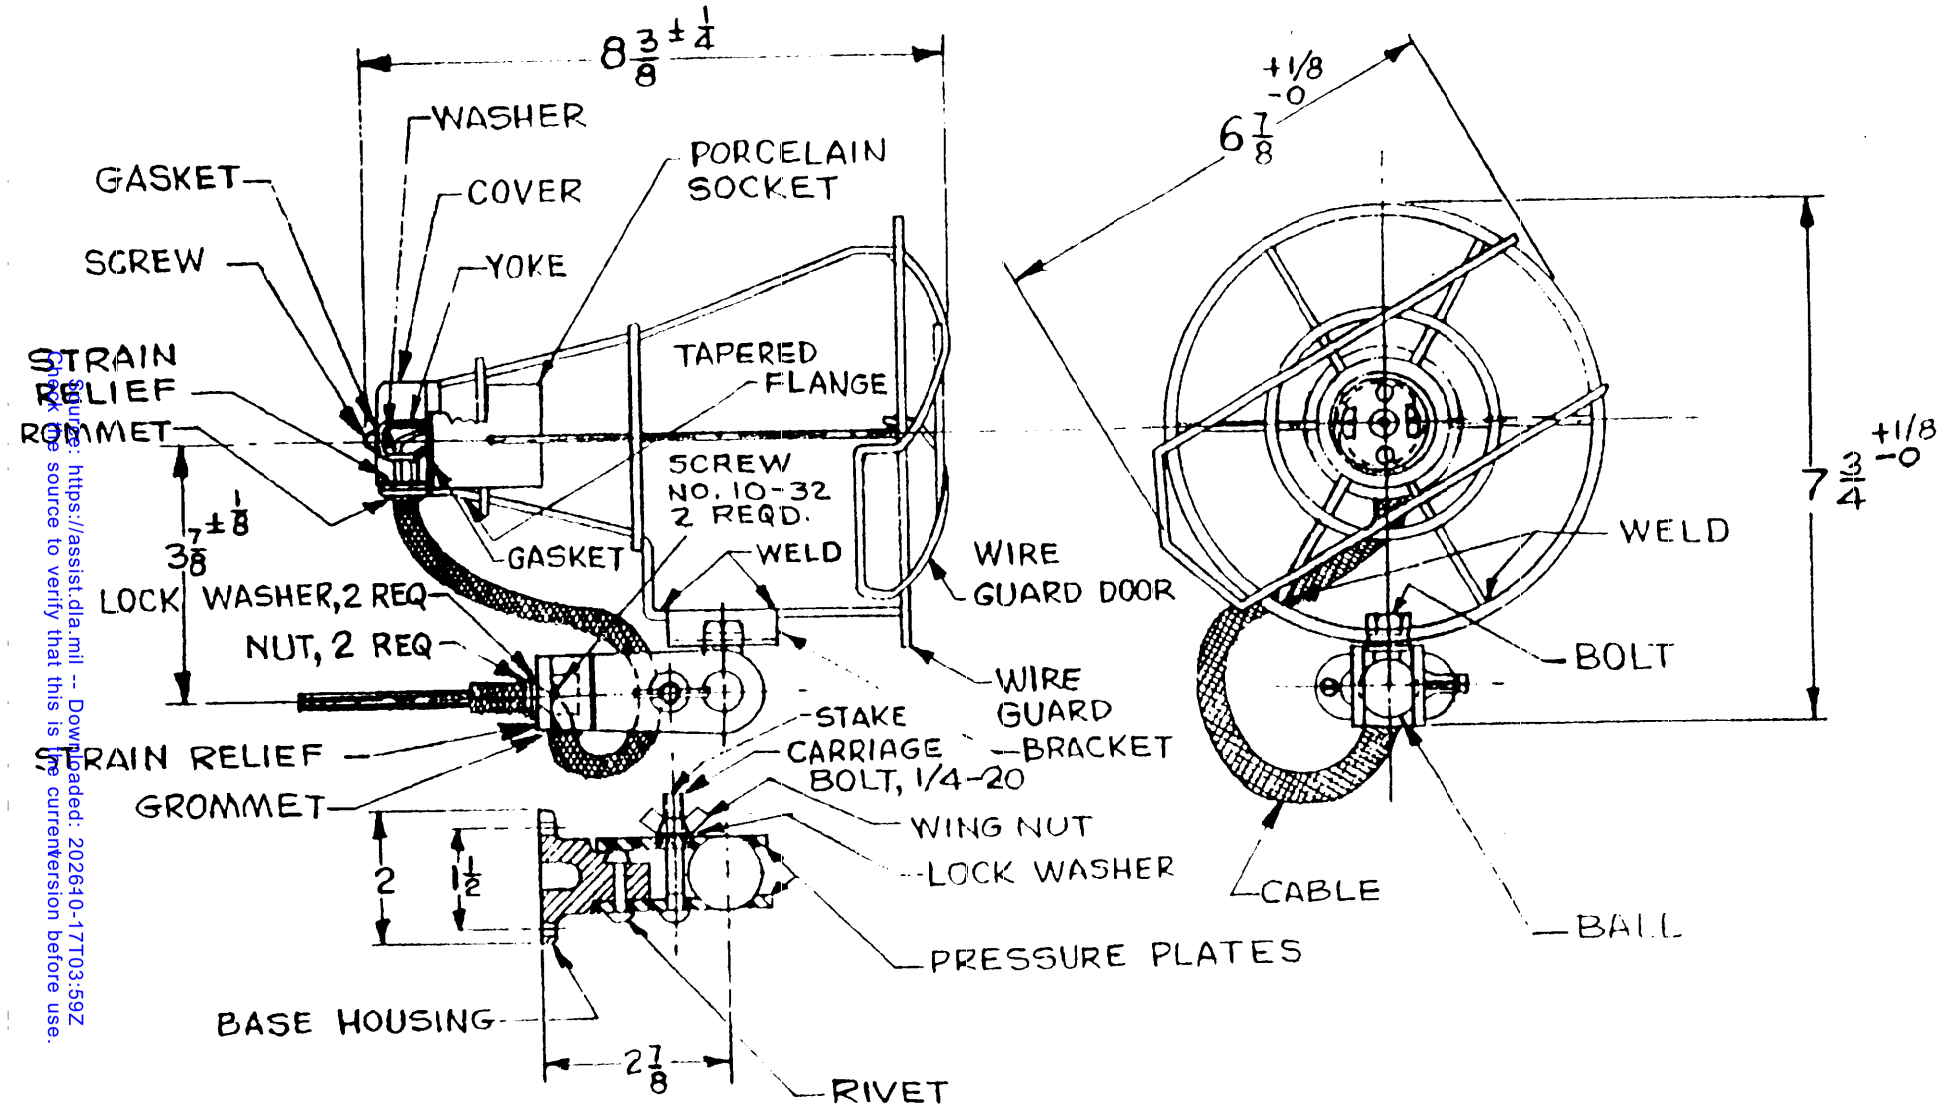

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. TOLERANCES: ± 1/64
3. SCALE: NONE.

FIGURE 5.

SWIVEL LAMPHOLDER AND GUARD ASSEMBLY.

Source: https://assist.dla.mil -- Downloaded: 2026-01-17T03:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-F-5003D(ME)	2. DOCUMENT DATE (YYMMDD) 920130

3. DOCUMENT TITLE: Floodlight Set, Eleectric, Tripod-Mounted, Four 150-Watt Projector Lamps

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

EASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (if applicable) (2) AUTOVON	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. NAME Gerry Harlow	b. TELEPHONE (Include Area Code) (1) Commercial (703) 664-1806	(2) AUTOVON 354-1806
c. ADDRESS (Include Zip Code) Army Belvoir RDE Center ATTN: STRBE-TSE Fort Belvoir, VA 22060-5606	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.