INCH-POUND

MIL-F-5003D(ME)
AMENDMENT 1
29 November 1994

MILITARY SPECIFICATION

FLOODLIGHT SET, ELECTRIC, TRIPOD-MOUNTED,

FOUR 150-WATT PROJECTOR LAMPS

This amendment forms a part of MIL-F-5003D(ME), dated 30 January 1992, and is approved for use within the USA Communications-Electronics Command, Logistics Research Center, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

3.6, delete paragraph and substitute:

"3.6 Electrical cable, plugs, and receptacles. The electrical cable shall conform to MIL-C-3432 as specified for low temperature, heat resistant cable (IS-L for insulation and JS-L for jacket). The connector plugs and connector receptacles shall conform to W-C-596. A protective boot shall be provided with each twist-lock connector plug which shall provide a raintight seal with the cable. All other connector plugs shall be molded to the cable."

3.7, delete fourth sentence and substitute: "The electrical cable shall be a 3-conductor, No. 18 AWG, light duty cable, 12-1/2 feet +1/2 -0 feet long, of the type specified in 3.6, terminated at one end with a 3-prong, polarized, twist-lock connector plug for connecting to the electrical connector box."

PAGE 5

3.8.3, delete the next to the last sentence and substitute: "Each lampholder shall be equipped with 10 feet +1/2 -0 feet of 3-conductor, No. 18 AWG, light duty electrical cable, of the type specified in 3.6, terminated at one end with a 3-prong, polarized, twist-lock connector plug for connecting to the electrical connector box."

PAGE 6

3.11, delete the next to the last sentence and substitute: "The connector box shall be provided with 100 feet +1/2 -0 feet of No. 12 AWG, medium duty, 3-conductor electrical cable, of the

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

type specified in 3.6, terminated at one end with a polarized, heavy-duty, outdoor-service-type, molded connector plug having two parallel contacts and one ground connector contact."

3.12, delete paragraph and substitute:

"3.12 Extension light. One portable extension light equipped with 50 feet of No. 18 AWG, medium-duty, 3-conductor electrical cable of the type specified in 3.6 shall be furnished. The portable extension light shall be in accordance with W-L-661, type III, class 2 except for the type of cable and connector plug. The cable shall be terminated at one end with a 2-pole, 3-wire, twist-lock grounding connector plug in accordance with W-C-596 for connecting to the electrical connector box."

3.13, delete first sentence and substitute: "A portable carrying chest shall be provided for storing and transporting the lamp assembly and extension light."

3.14, delete the paragraph in its entirety.

PAGE 10

4.5.1, delete line number 108 in its entirety.

PAGE 12

6.2.d, delete "(see 3.14)" and substitute "(see 3.16)".

6.2.e, delete "(see 3.15.3)" and substitute "(see 3.17.3)".

PAGE 15

Figure 2, delete in its entirety and substitute new figure 2.

PAGE 16

Figure 3, delete in its entirety and substitute new figure 3.

PAGE 18

Figure 5, delete in its entirety and substitute new figure 5.


Custodian:
Army - ME

Preparing activity:
Army - ME

Review activities:
Army - SM, MD
DLA - GS

Project 6230-A321

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

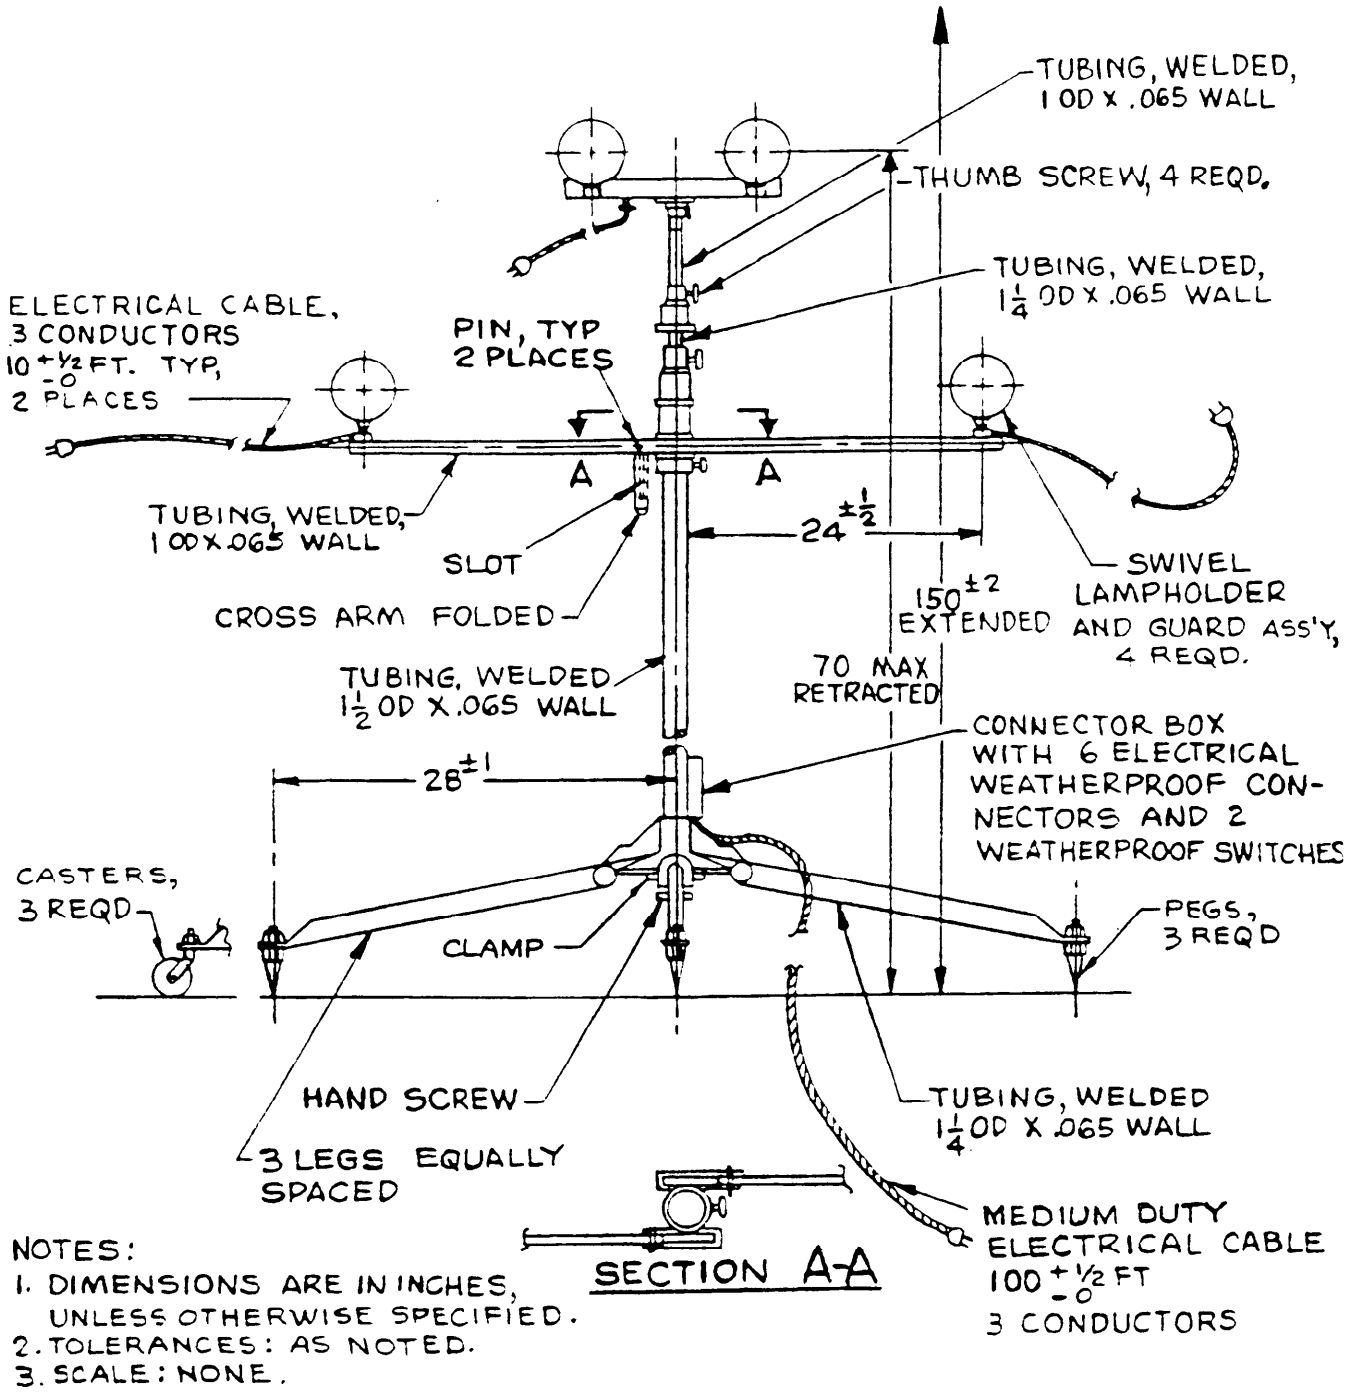


NOTES:
1. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED.
2. TOLERANCES: AS NOTED.
3. SCALE: NONE.

FIGURE 2.
FLOODLIGHT LAMP ASSEMBLY

X-2473B

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:59Z
Check the source to verify that this is the current version before use.

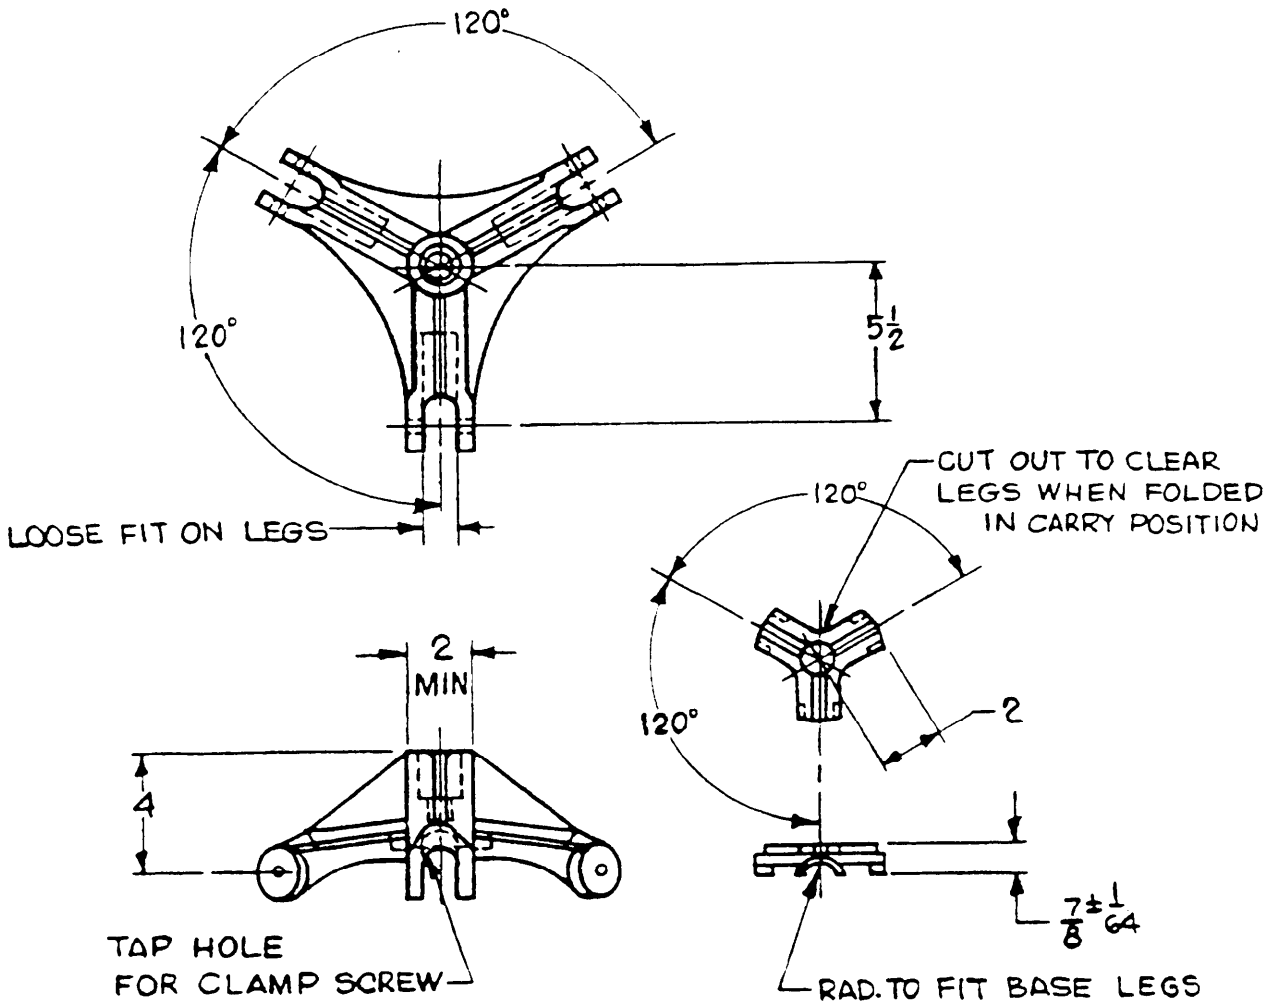


NOTES:

1. DIMENSIONS ARE IN INCHES.
2. TOLERANCES: FRACTIONS ± 1/8.
   ANGLES ± 1°.
3. SCALE: NONE.
4. MATL: MALLEABLE IRON CASTING.

FIGURE 3.
BASE CASTING AND LEG CLAMP.

X-2474 A

Source: https://assist.dla.mil -- Downloaded: 20260-17T03:59Z
Check the source to verify that this is the current version before use.

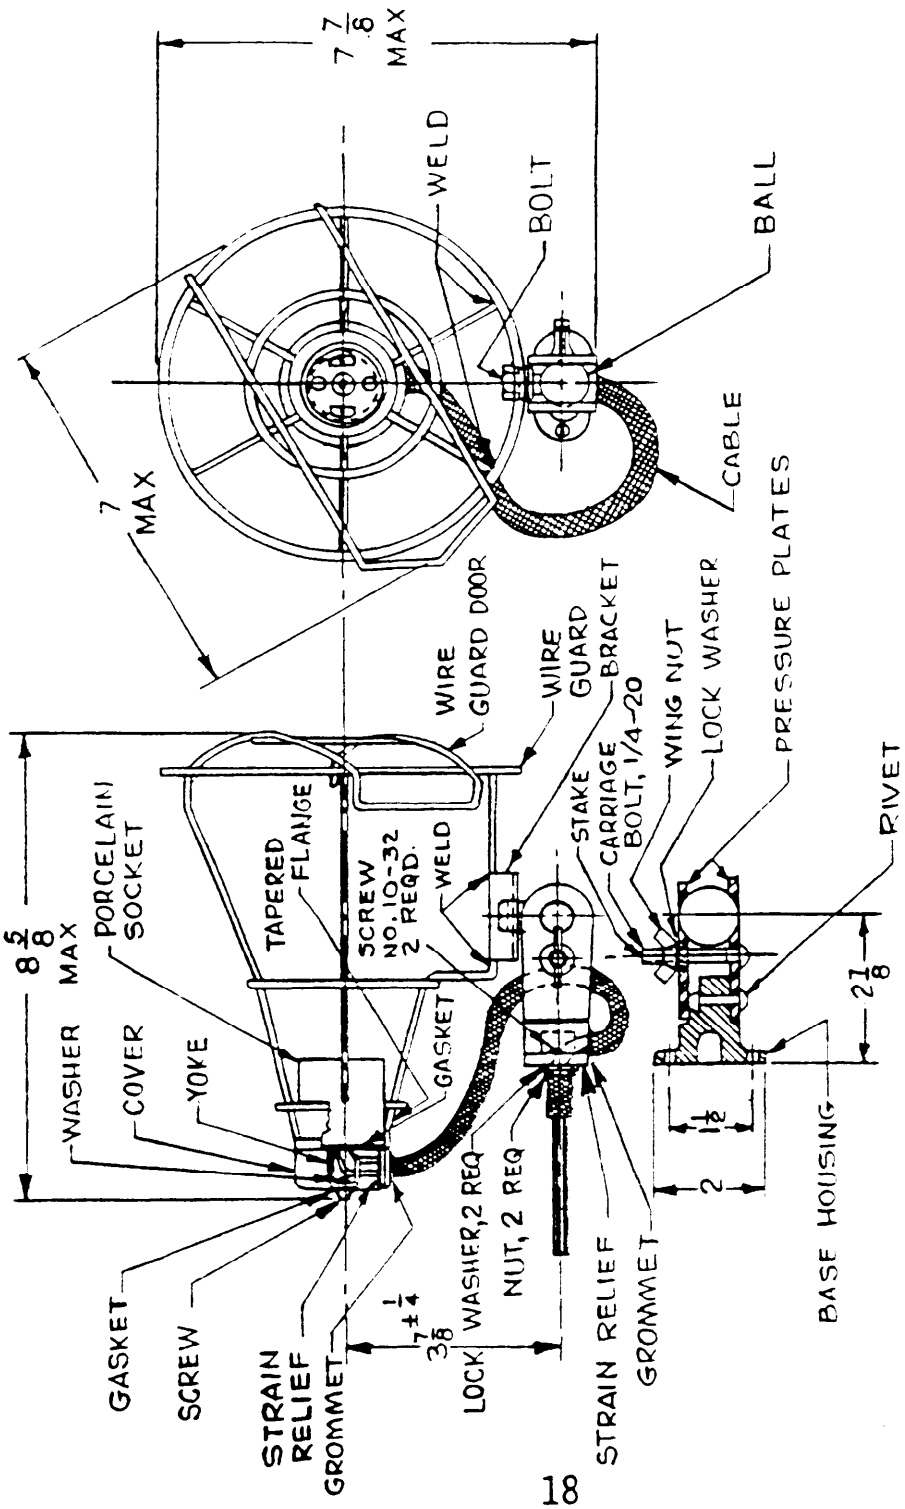

NOTES:
1. DIMENSIONS ARE IN INCHES.
2. TOLERANCES: ± 1/64
3. SCALE: NONE.

FIGURE 5.
SWIVEL LAMPHOLDER AND GUARD ASSEMBLY.
X-24768

Source: https://assist.dla.mil -- Downloaded: 20260-17T03:59Z
Check the source to verify that this is the current version before use.