NOT MEASUREMENT SENSITIVE

MIL-L-11484/71C
29 November 1991
SUPERSEDING
MIL-L-11484/71B
27 June 1988

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, BADGE, IDENTIFICATION, JOINT CHIEFS OF STAFF

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

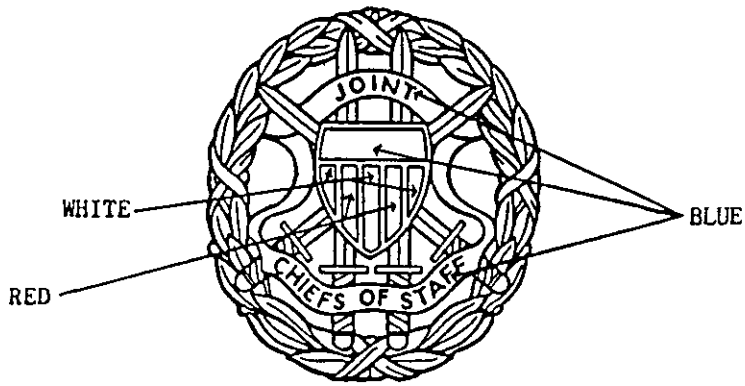

MATERIAL:
- BASE (Wreath): Red brass
- DEVICE: Gilding metal

DIMENSIONS:
- HEIGHT (Overall):
  - BASE: 9/16 inch (1.43 cm) (REF)
  - DEVICE: 15/32 inch (1.19 cm) (REF)
- WIDTH (Overall):
  - BASE: 1/2 inch (1.43 cm) (REF)
  - DEVICE: 15/32 inch (1.19 cm) (REF)
- THICKNESS (At thickest point):
  - BASE: .050 inch ± .005 inch (0.127 cm ± 0.012 cm)
  - DEVICE: .050 inch ± .005 inch (0.127 cm ± 0.012 cm)
  - ASSEMBLED: .100 inch ± .010 inch (0.254 cm ± 0.025 cm)

FINISH:
- BASE: Nickel plated, silver plated, oxidized, relieved, matte finish
- DEVICE: Hard enameled, rose gold plated, matte finish

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:28Z
Check the source to verify that this is the current version before use.

NOTES:

1. The base has a platform to support the device. This platform will require the base to be pierced in four ageas, above, below and to the sides of the platform. Pierced areas are indicated on the Government furnished hub.
2. The device shall be soft soldered to the base in the location shown.
3. The enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Red	1
White	28

4. The attaching device shall be prong and pick with ball type clutch. The prong shall be centered on the reverse side of the lapel button.
5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

Custodian:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH 2 of 2

Review activities:
Air Force - 82,99
Navy - MC
DLA - CT

(Project No. 8455-A634)

User activities:
Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:28Z
Check the source to verify that this is the current version before use.