NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/71G
12 August 2020
SUPERSEDING
MIL-DTL-11484/71F
28 September 2015

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, JOINT CHIEF OF STAFF IDENTIFICATION BADGE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

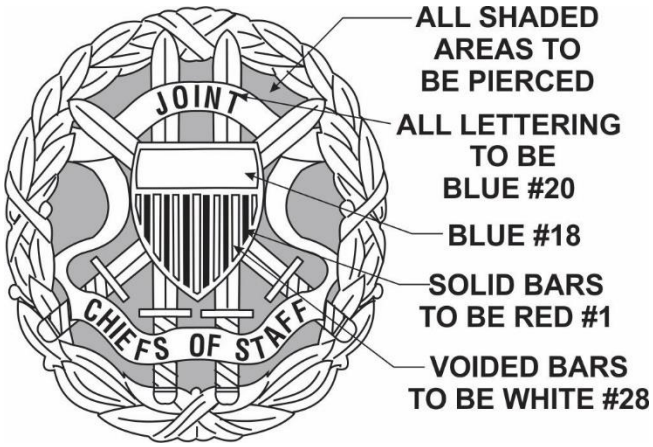

MATERIAL:
BASE (Wreath): Red Brass 85/15 (UNS Alloy No. C-230)
DEVICE: Gilding Metal 95/5 (UNS Alloy No. C-210)

FINISH:
BASE: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.
DEVICE: Epoxy resin (Stoning epoxy) 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DIMENSION:
HEIGHT (Overall):
BASE: 9/16 inch (REF)
DEVICE: 15/32 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:28Z
Check the source to verify that this is the current version before use.

WIDTH (Overall):
BASE: 1/2 inch (REF)
DEVICE: 15/32 inch (REF)
THICKNESS (At thickest point):
BASE: 0.050 inch ± 0.005 inch
DEVICE: 0.050 inch ± 0.005 inch
ASSEMBLED: 0.100 inch ± 0.010 inch

ATTACHING DEVICE:

1. The attaching device shall be a prong with pick and flat ball type clutch.

2. The prong shall be centered on the reverse side and either fused or hard soldered to the lapel button.

3. The base has a platform to support the device. This platform will require the base to be pierced in four areas - above, below and to the sides of the platform. Pierced areas are indicated on the Government furnished hub.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#18
White	#28
Blue	#20

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. The device shall be soft soldered to the base in the location shown.

3. Lapel button shall be lacquered.

4. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:28Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Review activities:
Navy - MC, CG1
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-2020-452)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:28Z
Check the source to verify that this is the current version before use.