NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/72F
12 August 2020
SUPERSEDING
MIL-DTL-11484/72E
28 September 2015

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, DISTINGUISHED CIVILIAN SERVICE AWARD, DEPARTMENT OF DEFENSE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

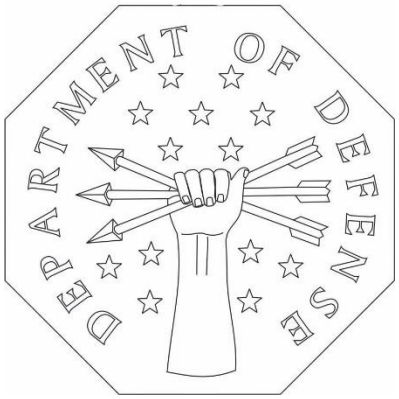

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: 24K Gold Plated, Matte Finish and shall match The Institute of Heraldry Metal Finish Chip Number 7.

DIMENSION:
HEIGHT (Overall): 7/16 inch (REF)
WIDTH (Overall): 7/16 inch (REF)
THICKNESS (At thickest point): 0.060 inch $\pm$ 0.005 inch

ATTACHING DEVICE:
1. The attaching device shall be a prong with pick and wing type clutch.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:29Z
Check the source to verify that this is the current version before use.

NOTE:
The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2020-453)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:29Z
Check the source to verify that this is the current version before use.