NOT MEASUREMENT SENSITIVE

MIL-L-11484/74C
14 January 1994
SUPERSEDING
MIL-L-11484/74B
27 June 1988

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, DISTINGUISHED SERVICE MEDAL, NASA

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

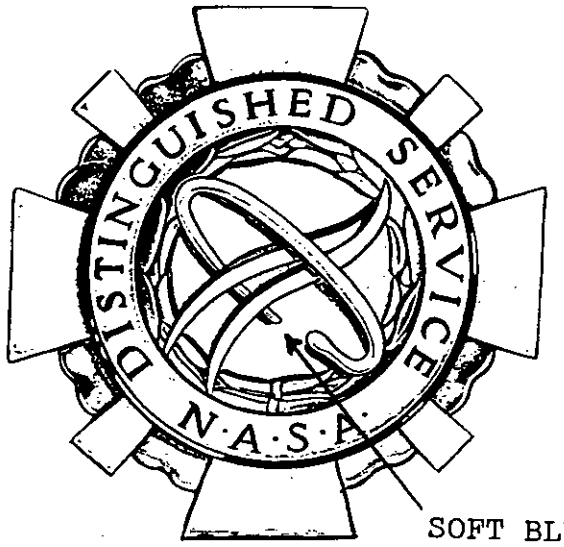

MATERIAL: Red Brass

DIMENSIONS:
DIAMETER: 9/16 inch (1.43 cm) (REF)
THICKNESS (At Thickest Point): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

FINISH: Gold Plated, Rose Gold Plated, Matte Finish

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T16:30Z
Check the source to verify that this is the current version before use.

2. Enameled area shall be as indicated. The color shall conform to the TIOH color chip number 30 with a dull finish or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of soft enamel at the option of the manufacturer.

4. Lapel button shall be lacquered.

5. Attaching device shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

Custodians:
Army - IH

Review activities:
DLA - CT

User activities:
Other - NASA

Preparing activity:
Army - IH

(Project No. 8455-0743)

Source: https://assist.dla.mil -- Downloaded: 20260-17T16:30Z
Check the source to verify that this is the current version before use.