MIL-C-44101A(GL)
10 June 1986
SUPERSEDING
MIL-C-44101(GL)
28 February 1985

MILITARY SPECIFICATION

COAT, WOMAN'S: CLASSIC DESIGN, POLYESTER/WOOL

This specification is approved for use by the U.S. Army Natick Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a woman's polyester/wool serge coat.

1.2 Classification. The coat shall be of one type in the following classes and sizes (see 6.2):

Class 1 - General Officers
Class 2 - Officers
Class 3 - Enlisted Personnel

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

Schedule of sizes for women

Short	Short plus	Regular	Regular plus	Long	Long plus	Extra long
		4R	4 R+	4L		
6S	6 S+	6R	6 R+	6L		
8S	8 S+	8R	8 R+	8L	8 L+	8 XL
10S	10 S+	10R	10 R+	10L	10 L+	10 XL
12S	12 S+	12R	12 R+	12L	12 L+	12 XL
14S	14 S+	14R	14 R+	14L	14 L+	14 XL
16S	16 S+	16R	16 R+	16L	16 L+	
18S	18 S+	18R	18 R+	18L	18 L+	
20S	20 S+	20R		20L		

Schedule of sizes for juniors

X-short	X-Short plus	Short	Short plus	Regular	Regular plus	Long	Long plus
		3 S		3 R	3 R+	3 L	
		5 S	5 S+	5 R	5 R+	5 L	
		7 S	7 S+	7 R	7 R+	7 L	7 L+
9 XS	9 XS+	9 S	9 S+	9 R	9 R+	9 L	9 L+
11 XS	11 XS+	11 S	11 S+	11 R	11 R+	11 L	11 L+
13 XS	13 XS+	13 S	13 S+	13 R	13 R+	13 L	13 L+
15 XS	15 XS+	15 S	15 S+	15 R	15 R+		
17 XS	17 XS+	17 S	17 S+	17 R			
19 XS	19 XS+	19 S	19 S+				

2. APPLICABLE DOCUMENTS

* 2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

C-F-206	-	Felt Sheet: Cloth, Felt, Wool, Pressed
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
V-T-295	-	Thread, Nylon
V-T-301	-	Thread, Silk
CCC-C-438	-	Cloth, Buckram, Woven and Nonwoven
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
DDD-T-86	-	Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, or Dyed)
PPP-B-636	-	Boxes, Shipping, Fiberboard

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-297	-	Cloth, Interlining, Cotton Warp, and Spun Hair-Wool or Rayon Filling
MIL-C-368	-	Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-371	-	Braid, Textile, Tubular
MIL-B-593	-	Braid, Textile (Flat)
MIL-C-823	-	Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
MIL-B-3461	-	Button, Insignia, Metal, Uniform and Cap
MIL-C-15062	-	Cloth, Flannel, Wool, Undercollar Cloth
MIL-P-15064	-	Pads, Shoulder and Sleeve-Head
MIL-C-16375	-	Cloth, Wigan, Cotton
MIL-L-35078	-	Loads, Unit; Preparation of Semiperishable Subsistence Items, Clothing, Personal Equipment and Equipage: General Specification For
MIL-T-43548	-	Thread, Polyester, Cotton-Covered and Rayon Covered
MIL-C-43718	-	Cloth, Twill, Polyester; Polyester and Cotton; Polyester and Rayon
MIL-C-44121	-	Cloth, Twill, Polyester

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets
MIL-STD-1608	-	Provisions for Evaluating Quality of Coats, Women's, Dress

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detailed specifications, specification sheets or MS standards), the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

* 3.1.1 First article. When specified, in the contract or purchase order a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.2 Material (see 6.5).

3.2.1 Basic material. The basic material shall be 11.5 ounce polyester and wool serge, Army Green 344, conforming to type III, class 3 of MIL-C-823.

3.2.2 Lining. The material for the lining shall be rayon twill, Army Green 45, conforming to class 1, of MIL-C-368. As an alternate, the lining material may be polyester, twill cloth, Army Green 461, conforming to MIL-C-44121.

3.2.3 Collar interlining. The material for the collar interlining shall be cotton buckram cloth, natural or bleached conforming to type I, class 2 of CCC-C-438.

3.2.4 Twill cloth. The material for lower hanging pockets, inside chest pockets, inside lower right pocket, shoulder loop interlining, bridle stays, back neck stay, armhole stays, chest pocket stays, and front edge stays, shall be a polyester and cotton or rayon cloth matching the shade of the basic material or black, conforming to class 1 of MIL-C-43718, except that the non-fibrous material content and colorfastness requirements for perspiration and crocking shall not apply.

3.2.5 Coat fronts. The coat front material shall be cotton warp and spun hair-wool or rayon filling cloth conforming to class 2 of MIL-C-297.

3.2.6 Undercollar material. The material shall be wool flannel cloth, Army Green 48, conforming to MIL-C-15062 except that the colorfastness requirements for perspiration and crocking shall not apply.

3.2.7 Shoulder piece. The felt for the shoulder piece shall be pressed wool conforming to type III (roll-felt) classification 11A2 of C-F-206.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

3.2.8 Sleeve hem and coat bottom hem interlinings. The material for interlining the sleeve hems and the bottom hems shall be cotton wigan conforming to type I of MIL-C-16375.

3.2.9 Shoulder pads. The shoulder pads shall conform to type III, class 1 of MIL-P-15064.

3.2.10 Sleeve-heads. The sleeve-heads shall conform to type IV of MIL-P-15064 except that the length shall be 12 to 12-1/2 inches.

3.2.11 Stay tape. The material for the stays shall be cotton, pre-shrunk, conforming to type I, classes 1, 2, or 3 (dyed black) of DDD-T-86, except that the requirement for non-fibrous material shall not apply. When black tape is used, it shall show colorfastness to wet drycleaning, perspiration, and crocking. The stays shall be 1/4 inch for armholes, back shoulder, and center back vent.

3.2.12 Braid.

3.2.12.1 Hanger loop braid. The braid for the hanger loop shall conform to type IX, class 1 of MIL-B-371. The color shall match the basic material and shall show "good" fastness to crocking and wet drycleaning.

3.2.12.2 Ornamentation (sleeve braid) for class 1 and 2 coats. The ornamentation for the sleeves of the class 1 coats shall be 1-1/2 inches and for class 2 coats shall be 1/2 inch wide, mohair braid, Black 194, conforming to type I, class 3 of MIL-B-593 except that colorfastness to perspiration shall not apply.

* 3.2.13 Labels. Each coat shall have a class 2 size label and a class 15 combina-tion identification and instruction label conforming to type VI of DDD-L-20. The labels shall show fastness to drycleaning. The combination label shall include the following information:

DRY CLEAN ONLY
Use damp cloth for all outside pressing.
Roll-press (without creasing) sleeves and lapels.
Remove gloss marks at edges and seams with iron and damp cloth.
DO NOT REMOVE THIS LABEL.

3.2.14 Thread.

3.2.14.1 Thread, polyester, cotton-covered and rayon covered. The cotton-covered and rayon covered polyester thread shall conform to MIL-T-43548 in the colors, sizes, and manufacturing uses as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

Use	Ticket	Color	Ply
Seaming and stitching of coat	30, 50, 70	(Green E, C.A. 66034)	2 or 3
Blindstitching, overedging, and machine felling	70	(Green E, C.A. 66034)	2
Button sewing, hand	30	(Green E, C.A. 66034)	2 or 3
Button sewing, machine (except automatic sew and shank type)	30	(Green E, C.A. 66034)	2 or 3
Braid stitching (class 1 and 2 coats only)	50	(Black)	2 or 3
Tacking armhole and attaching sleevehead and pads	30	(White)	2 or 3

3.2.14.2 Thread, basting. The thread for basting shall be a good commercial grade bleached or unbleached cotton thread. As an alternate, the cotton-covered polyester thread used for seaming and stitching may be used for basting or a soluble monofilament synthetic basting thread may be used for those operations where the thread is required to be removed, providing the coat is subsequently given a treatment by a drycleaning agent in which the synthetic thread is soluble. When the soluble thread is used, any residue remaining in the coat after the drycleaning process shall be brushed off or removed.

* 3.2.14.3 Thread, silk. The silk thread shall conform to V-T-301 in the types, sizes, and manufacturing uses as follows:

Use	Thread type	Size	Ply
Machine top stitching	I	0	3
Machine tacking	I	0	3
Hand felling or machine type felling	III	A or C	2
Machine buttonhole	I	B or C	3
Hand made buttonhole	I	10	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

* 3.2.14.4 Thread, nylon. Nylon thread may be used as an alternate to silk thread as indicated in 3.2.14.3. Nylon thread may also be used for padding lapels and collar. The nylon thread shall conform to the following types and sizes of V-T-295.

Thread type	Size
IV	A and C
VI	B, F and O
III	000 (for padding)
I	10 (for handmade buttonhole)

3.2.14.5 Gimp. The gimp for reinforcing the buttonholes shall be cotton, type I or II, size 8, green E, C.A. 66034 color conforming to V-T-280.

3.2.14.6 Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation simulating hand sewing is utilized, the thread shall be nylon waxed monocord, special No. 4, having a minimum breaking strength of 15 pounds and a minimum length per unit weight of 3600 yards per pound when tested for these requirements and for colorfastness in accordance with test methods specified in V-T-295.

3.2.14.7 Colorfastness. All dyed thread shall show fastness to light, perspiration, and wet drycleaning equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to light, perspiration, and wet drycleaning.

3.2.15 Buttons. The buttons shall be metal, uniform, 25-line hopper back with split pin toggles for the shoulder loops and 30-line hopper back for the front, conforming to type I, style 2, class A of MIL-B-3461, except that hopper back buttons may be used with toggles.

3.2.16 Snap fasteners. The snap fasteners for the shoulder loops shall be round or square sew-on type, size 00, brass with black japan finish.

3.3 Design. The design is a fitted, single breasted, four button coat with side body construction, bust and front waist darts, slanted flap pockets, open notch collar, and two piece sleeves with shoulder loops. The back has neck darts and there is a vent in the center back seam. The coat is fully lined.

3.4 Figures. Figures are furnished for information only. If there are any inconsistencies between the document and the figures, the document shall control.

3.5 Patterns. Standard patterns to be used for cutting the contractor's working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns, which shall not be altered in any way. The patterns provide for the following seam allowance:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

1/4 inch

Shoulder loop point
Top front dart
Front waist dart
Pocket flap setting seam
Outer arc of shield
Pocket flap construction
Front facing to fronts
Lower right inside pocket opening from notch to notch

3/8 inch

Under sleeve to top sleeve
Sleeve setting seam
Shoulder seam
All other seams unless otherwise specified.

1/2 inch

Collar setting seam
Side body to front, lining side body to front, center back seam, and lining center back seam

3/4 inch

Side body to side back seam
Lining side body to side back seam

3.5.1 Pattern parts. The component parts of the coat shall be cut from materials as specified in accordance with the number of parts specified.

*TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut parts
Basic material	Front	2
	Side body	2
	Back	2
	Undersleeve	2
	Top sleeve	2
	Top collar	1
	Shoulder loop	2
	Front facing	2
	Pocket flap	4
	Lower pocket facing	2
	Lower pocket double welt	2
Rayon or polyester lining cloth	Front	2
	Side body	2
	Back	2
	Top sleeve	2
	Undersleeve	2
	Armhole shield	4
	Inside chest pocket piping	1
	Inside lower right pocket	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

*TABLE I. List of pattern parts (cont'd)

Material	Pattern nomenclature	Cut parts
Twill cloth	Lower pocket front hanging pocket	2
	Lower pocket back hanging pocket	2
	Inside chest pocket	2
	Shoulder loop interlining	2
Cloth, cotton, buckram	Collar interlining	1
Cloth, cotton, hair-wool	Front interlining	2
	Shoulder piece interlining	2
Press wool felt	Shoulder piece	2
Cloth, flannel, wool	Undercollar	1
	Shapers	
	Undercollar stand	
	Undercollar	
	Finished lapel and collar	
	Working lapel	
	Pocket flap	
	Front	

3.6 Construction.

3.6.1 Stitches, seams and stitching. Stitch, seam, stitching types, and stitches per inch specified in table II shall conform to FED-STD-751. Where two or more seam or stitch types are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that raw edges, run-offs, twists, pleats, puckers, or open seams will not result. All seams shall start and finish evenly. Thread tension shall be maintained so that tight or loose tension will not result. Seams, required to be worked out, that have a fold of 1/16 inch or more depth, shall be considered as not having been worked out.

3.6.1.1 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.1.2 Thread breaks and ends of seams. Ends of all seams and stitchings (except darts), when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch except on labels where the overlap shall be not less than three stitches. The ends of hand felling shall be tacked with not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. The thread ends of darts shall not be trimmed closer than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

3.6.2 Buttonholes and eyelets. The buttonholes shall be eyelet-end, square bar, cut-first type worked over gimp with the ends of the gimp pulled through to the underside. The ends of the buttonhole stitching shall be bartacked by hand or by machine, the width of the bar section, catching the ends of the buttonhole stitching, and the gimp. The finished cut length of the buttonhole for the front closures shall be 3/4 + 1/8 -0 inch. The shoulder loop shall have an eyelet measuring 3/16 to 5/16 inch in diameter at inside cut edge. The purl of the buttonhole shall be on the outside of the coat. Tack the ends of the buttonhole with a 1/4 inch bartack containing 21 stitches if done by machine, or 6 to 8 stitches if done by hand. All loose thread ends shall be trimmed or fused to within 1/8 inch of the bartack. Additive treatments or materials used to secure the ends of the stitching or to stiffen the fabric, prior to stitching the buttonholes is prohibited.

3.7 Manufacturing operation requirements. The coats shall be made in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitches used to facilitate manufacture is permissible provided that the thread is removed or does not show on the finished coat.

3.7.1 Pressing Pressing specified in table II shall be performed by use of a heated pressing iron or machine as commercially used. Any additional underpressing to facilitate manufacture is permissible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Spread the material without tension. The cloth lay shall not be greater than 60 plies. The cut parts from the top and bottom plies shall match and correspond to the pattern. b. Lay the material in uniform widths and lengths. The plies shall not be stretched, pulled nor full, and one side of the lay shall be even. Mark each component part in the top of the main lay with the size of coat. c. Cut coat in strict accordance with the patterns furnished, which show directional lines, size, and notches for proper assembly of parts. Directional lines shall be placed in the warp direction of the material. Waist notches shall be shallow to permit alteration. d. Cut all basic material parts of each coat out of the same piece of material except the under pocket flaps, pocket facing, and lower pocket piping which may be cut from ends. Parts cut from ends shall approximate the shade of the basic material. e. Cut all rayon lining parts of each coat out of the same piece of material except sleeve linings, lower right inside pocket, and shields which may be cut from ends. Parts cut from ends shall approximate the shade of the lining. The two sleeve linings shall match in shade and the two finished shields shall match in shade.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) f. Cut lining pieces for inside chest pocket facing in warp direction 2-1/4 inches wide by 6-1/2 inches long. g. Cut the twill cloth for stays of sufficient length to meet operation requirements and in the direction and width as follows (the cloth may be placed on rolls): Location — Cut direction — Width Bridle and chest pocket — Warp — 1/2 inch Front edge — Filling — 1/2 inch Back neck — Filling — 3/4 inch Armhole — Bias — 3/4 inch Stays for abutting bust and waist darts on front interlining — Bias — 3/4 inch h. Cut the twill cloth for shoulder loop interlining, lower hanging pockets, and inside chest pocket according to patterns furnished. i. Cut the interlining for fronts and chest piece in accordance with the patterns furnished. j. Cut the interlining cloth for collar interlining in accordance with patterns furnished.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd)						
	k. Cut wigan for interlinings on the bias, 3-1/2 ± 1/8 inch wide for sleeves and 2-3/4 ± 1/8 inch wide for coat hem (see operation 24).						
	l. Cut the hanger loop of sufficient length to comply with finished length (see operation 28.h).						
	m. Cut the wool flannel cloth for undercollar in accordance with patterns furnished.						
	n. Cut the felt for shoulder piece in accordance with patterns furnished.						
2.	Replacement of damaged parts.						
	Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as classified in MIL-STD-1608, are excluded and replaced with non-defective and properly matched material.						
3.	Marking.						
	The component parts of the coat shall be marked or bundled to insure a uniform shade or size throughout the garment. (Bundling is permitted for lining cut parts only.) Any method of marking may be used except:						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking. (cont'd)						
	a. Corrosive metal fastening devices. No metal device shall be used on rayon lining.						
	b. Sew-on type tickets (on rayon only).						
	c. Adhesive type tickets which leave an impression or traces of paper or adhesive on the material after removal of tickets.						
	NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the coat, and wherever possible, is covered by the seam allowance.						
4.	Make shoulder loops.						
	Finished appearance. The shoulder loops shall be uniformly stitched and shall finish smooth and flat, without twists, gathers, puckers, pleats or raw edges, and shall be uniform in shape and size. The eyelets shall be clean cut, well made, properly positioned, and the stitching shall be securely caught in the basic material.						
	a. Position interlining on shoulder loop and baste into position.	Hand or machine			Commercial 50	50	
	b. Fold loop lengthwise and seam raw side edges.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make shoulder loops. (cont'd)						
	c. Shift the seam to off center position of loop and, with the seam spread open, stitch around the pointed end.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70	
	d. Press seam open.						
	e. Trim point, turn loop, and force out point.						
	f. Stitch shoulder loop 1/16 to 3/32 inch from turned edge.	301	SSe-2(b) and OSf-1	10-14	O silk or O nylon	O silk or O nylon	
*	g. Make an eyelet centered on the pointed end of loop. The center of eyelet shall be 1-7/8 ± 1/8 inches from point. The cut of the finished eyelet shall measure no less than 3/16 inch or more than 5/16 inch (in diameter).	Machine	Eyelet				
5.	Make pocket flaps.						
	Finished appearance. The pocket flaps shall be uniformly stitched and shall finish smooth and flat, without twists, gathers, puckers, pleats, or raw edges and shall be uniform in shape and size in accordance with the finished pocket flap shaper. The seamed edges, the corners and points of the flaps shall be well worked out.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
				NEEDLE	BOBBIN/ LOOPER	COVER
: flaps. (cont'd)						
ɔn outer flap to under flap. Sew around ɔttom of flap and trim point. Turn flap ide and work out seam.	301 or 401	SSe-2(a)	10-14 10-14	50 50	50 70	
:itch around ends and bottom of flap 1/16 edge. The under flap must not show on flap.	301	SSe-2(b)	10-14	0 silk or nylon	0 silk or nylon	
appearance. The collar shall be uniform ıce and the edges shall be smooth and flat isting, gathers, puckers, or raw edges (top . The interlining shall not show after the set.						
interlining to undercollar felt and quilt :o six rows of equally spaced blind-	103 or 306 or 313 or 314	SSm-5 or 6 SSm-5 or 6 SSm-5 or 6 SSm-5 or 6	4-8 4-8 4-8 4-8	70 70 70 70	 70 70 70	
ındercollar flat.						
ıdercollar to conform with undercollar ıe undercollar may be die cut to conform ercollar shaper.						
ıdercollar interlining 1/8 to 3/16 inch .ower edge of undercollar.						

ION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-01-21T23:53:33
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make collar. (cont'd)						
	e. Stitch undercollar to interlining 1/2 ± 1/16 inch from edge.	301	SSa-1	10-14	50	50	
	f. Mark the breakline of undercollar with the undercollar stand shaper.						
	g. Stitch undercollar to interlining at breakline. Stand shall be 1-1/4 inches at center back.	301	SSa-1	10-14	50	50	
*	h. Position outer edge of top collar between outer edges of undercollar and interlining. Seam top collar to interlining easing in between notches. When operation 6.1. (top edge) is performed by machine, the top collar need not be sewn to interlining.	301	LSa-1	4-6	50	50	
	i. Baste ends, outer edge of collar, and at crease line.	Hand or 101			Commercial		
	j. In lieu of operations 6.h. and 6.i. baste the top collar to the undercollar along crease line and outer edge matching notches.	Hand or 101			Commercial		
	k. Trim and turn edges of top collar over interlining between undercollar and interlining, and baste edges.	Hand or machine			Commercial		
*	l. Fell top and side edges of top collar to undercollar by hand, or top edge may be machine felled with simulated hand stitching. The corners and sides shall be felled by hand. When simulated hand stitch- is used, the operation shall precede collar basting.	Machine (simulated hand felling)		6-10	A silk or B nylon		
	or	or hand		6-10			

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make collar. (cont'd)						
	The side edges may be stitched 1/16 inch from finished shaped edge through the collar interlining. Trim top collar material only, 1/4 to 3/8 inch from finished seam line.	301		10-14	50	50	
	m. Trim bottom edge of top collar to allow for seaming.						
	n. Press and crease stand of undercollar holding crease line short and stretch outer edge of collar across the shoulders. Center area of crease line shall be straight for a distance of 3 to 4 inches.						
7.	Make coat sleeves and sleeve linings.						
	Finished appearance. The sleeves shall be uniform in width. The seams shall be pressed smooth and flat and shall be without gathers, puckers, pleats, or raw edges. The blind stitches for tacking turnup of sleeves shall catch the wigan only. The linings and wigan shall not be short or tight at bottom of sleeves.						
	a. Stitch forearm seams, matching notches.	301 or	SSa-1	10-14	50	50	
		401	SSa-1	10-14	50	70	
	b. Shape-press seam open without stretching.						
	c. Place bottom edge of wigan (see operation 1.k.) across the sleeve 1/2 to 3/4 inch below sleeve hem	101	SSa-1 and	6-10	50		
	notches. Stitch the wigan to forearm seam and to	101 or	LSbd-1	6-10	50		
	both backarm seam allowances.	301	SSa-1 and	6-10	50	50	
		301	LSbd-1	6-10	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil. Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7	Make coat sleeves and sleeve linings. (cont'd)						
	d. Baste wigan to sleeve along the fold line, as indicated by marks on pattern. (This operation is optional.)	Hand or machine					
	e. Turn up bottom of sleeve as indicted by marks on pattern and baste along folded edge.	Hand or machine	OSf-1 OSf-1				
	f. Press bottom of sleeve. Remove bastings.						
	g. (Class 1 and 2 coat only.) Stitch braid to sleeve with the bottom edge of braid 3 ± 1/8 inches from bottom edge of finished sleeve. The stitching shall be 1/16 to 3/32 inch from each edge of braid.	301	SSau-2	101-4	50 (black)	50 (black)	
	h. Stitch backarm seam, matching notches. In class 1 and 2 coats, the top and bottom edges of braid shall be aligned and the ends of the braid shall be caught in the seaming.	301 or 401	SSa-1 SSa-1	10-14 101-4	50 50	50 70	
	i. Press seam open and flat.						
	j. Tack forearm and backarm seam allowance of hem to sleeve seam allowance.	103 or hand		4-6 4-6	70 70		
	k. Stitch lining forearm and backarm seams.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make coat sleeves and sleeve linings. (cont'd)						
	1. The sleeve linings shall extend no less than 9/16 inch above top of sleeve. Tack forearm seam and back-arm seam of sleeve lining to forearm seam and back-arm seam of sleeves respectively distributing lining fullness evenly. The tacking shall extend from not more than 5 inches below top of sleeve to not more than 5 inches above creased bottom edge of sleeve.	103 or hand		4-6 4-6	70 70		
	m. Pull sleeve through lining. Baste turn up of sleeve if sleeve lining is to be felled by hand. Sleeve lining shall finish not less than 1 inch above bottom edge of sleeve. The sleeve lining may be felled without basting if simulated machine stitch is to be used. See operation 35.e.		101 or hand		Commercial		
	NOTE: Operations 7.d. and 7.e. may be performed after stitching backarm seam, operation 7.h.						
8.	Make front facing.						
	a. Seam the cut out darts tapering to nothing 1/2 ± 1/16 inch beyond end of slash mark on pattern.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70	
	b. Press dart open and press point flat.						
9.	Make shields.						
	a. Superimpose two shield pieces face to face and stitch around outer arc.	301	SSa-1	10-14	50	50	
*	b. Turn shield to right side, work out seams and raise stitch seam on underside.	301	LSq-2	10-14	50	50	
	or						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make shields. (cont'd)						
	Superimpose two shield pieces back to back and join together with a 7/8 inch wide bias binding using a folder. The bias binding shall be cut from the same material used for the lining. The finished side shall show on the top and the color of the thread shall match the lining fabric.	301	BSc-1	10-14	50	50	
	When the alternate is used the binding must be cut on the bias 7/8 ± 1/16 inch wide. The binding may be put on rolls.						
10.	Make lining fronts and attach combination identification-instruction label.						
	a. Fold the uncut waist darts as indicated by marks on pattern and stitch. The darts shall be tapered to nothing 1 ± 1/16 inch beyond drill holes.	301 or 401	OSf-1 OSf-1	10-14 10-14	50 50	50 70	
	b. Position the label on the right front (as worn) with the right side of label 2 to 2-1/2 inches from, and parallel with, the front raw edge of lining. The top of label shall be 2 ± 1/8 inch below the waist darts. Stitch label on all four sides. The stitching shall not be through the printing.	301	LSbj-1	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make inside chest pocket.						
	a. Join left front lining to left front facing.	301	SSa-1	10-14	50	50	
	b. Press seams and darts toward side body.						
	c. Mark position for a 1/8 to 3/16 inch double piped pocket on left front lining as indicated by pattern.						
	d. The top and bottom raw edges of the facing shall be turned in and seamed to the twill cloth pocket. When either edge is selvage, the edge need not be turned in.	301	SSa-1	10-14	50	50	
	e. Seam twill cloth pocket, positioned at marks on coat facing and lining with twill cloth stay extending to the armhole on the underside, with two rows of stitching, no less than 1/4 or more than 3/8 inch apart.	301	SSv-2	10-14	50	50	
	f. Cut opening of the pocket and tongue notch the ends of the opening. The finished length of the pocket opening shall be not less than 4-3/4 inches for women's sizes 12 through 20 and junior sizes 11 through 19 and not less than 4-3/8 inches for women's sizes 4 through 10 and junior sizes 3 through 9. It shall not extend into the facing more than 3/4 inch nor extend into the side body.						
	g. Turn pocket through cut opening, make top and bottom piping, and tack corners through tongue notch.	301		10-14	50	50	
	or						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make inside chest pocket. (cont'd)						
	Pocket opening may be accomplished with a double piped pocket machine which stitches, cuts, and turns piped edges in one operation. When a machine is used, the piping may be trimmed to permit insertion into the machine. The joining seam of the top and bottom piped edges shall be raised stitched through lining and coat facing prior to pocket closing, and top edge stitched through all plies. Tack ends of pocket opening.	301		10-14	50 or A silk or O nylon	50	
					50 or A silk or O nylon	50 or A silk or O nylon	
	h. Turn pocket into position and stitch sides and bottom edge of the pocket. The finished pocket shall measure not less than 5 inches in depth for all sizes. The back part of the pocket twill cloth shall be held taut to prevent gapping at the pocket opening.	301	SSa-1	10-14	50	50	
	i. Stitch twill cloth stay from back end of pocket to armhole. Notch top of pocket at front edge of the full width of seam allowance and blindstitch inner ply of pocket in facing (see operation 35.g. for alternate operation).	301	SSv-1 and SSm-1	10-14	50	50	
		103 or	SSm-1	2-4	70		
		306	SSm-1	2-4	70	70	
	j. Press pocket smooth and flat.						
12.	Make lower inside pocket in right front lining.						
	a. Stitch top pocket ply to right lining, according to notches on pattern. Turn and raise stitch through top pocket ply 1/16 inch from turned edge. Do not catch front lining in raise stitching.	301	SSa-1	10-14	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make lower inside pocket in right front lining. (cont'd)						
	b. Stitch under pocket ply to right front cloth facing according to notches on pattern.	301	SSa-1	10-14	50	50	
*	c. Position lining to front facing with pocket notches matching. Stitch the length of the seam leaving pocket opening. The pocket opening shall measure 3-1/2 ± 1/8 inches.	301	SSa-1	10-14	50	50	
*	d. Stitch rayon or polyester lining cloth pocket around curve and across bottom.	301	SSa-1	10-14	50	50	
	e. Press seams and darts toward side body and press pocket flat.						
13.	Make back linings and join side body to front linings.						
	a. Fold the uncut back neck darts as indicated by marks on pattern and stitch. The darts shall be tapered to nothing, 1 ± 1/16 inch beyond drill holes.	301	OSf-1	10-14	50	50	
	b. Join center back seams from neck to waist notch. Leave vent open.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70	
	c. Join side body to front matching notches.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70	
	d. Press darts and side body seam toward back.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Make front interlining.						
	a. Abut the edges of top bust darts and side bust dart and front waist dart and stitch together through stay pieces. The abutted edges may be stitched together prior to stitching through stay.	304	FSa-1	4-8	50	50	
	b. Position the shoulder interlining and shoulder felt on the inside of the front with shoulder interlining next to front according to marks on interlining pattern.						
	c. Stitch two or three rows 1/4 inch apart along the edge of arc catching the shoulder felt piece, shoulder interlining, and front interlining together allowing room for the shoulder pad.	103 or 306 or 313 or 314	SSm-6 to 8 SSm-6 to 8 SSm-6 to 8 SSm-6 to 8	4-8 4-8 4-8 4-8	70 70 70 70	 70 70 70	
	d. Steam shrink fronts and press dry to conform to shape of body.						
15.	Make fronts.						
	Finished appearance. All darts, pockets, and flaps shall be correctly positioned, finished without pleats or gathers, and uniformly sewn. The width of pocket cords or pipings, pocket openings, and depth of pockets shall be as specified. The back edge of the pocket flap shall be aligned with front side body seam and in no instance finish more than 3/16 inch in front or back of this seam.						
	a. Seam bust darts tapering to nothing 1/2 to 5/8 inch beyond end of slash mark on pattern.	301	SSa-1	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15	Make fronts. (cont'd)						
	b. Press dart open and press point flat.						
	c. Seam the cutout waist darts from flap setting seam tapering to nothing 1/2 to 5/8 inch beyond end of slash.	301	SSa-1	10-14	50	50	
	d. Press seam open and press point flat.						
	e. Clip in corner on front dart seam. Position flap to lower flap setting seam and stitch flap and seam together. Size of flap shall be checked against pocket flap shaper.	301	SSa-1	10-14	50	50	
	f. Press pocket flap setting seam open. The seam allowances of the pocket flap will be pressed up.						
	or						
	Flap may be stitched to front, after front dart seam has been completely closed and front has been stitched to side body (operation 17.a.). Prior to setting flaps, front waist darts must be pressed open and size of flaps shall be checked against finished pocket flap shaper.						
	g. Overedge top raw edge of flap.	502 or 503	EFd-1 EFd-1	6-8 6-8	70 70	70 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make fronts. (cont'd)						
	h. Position right side of flap to front with bottom edge up. Stitch line will be 1/8 inch above seam and front of flap will finish in line with front-waist dart. Stitch flap to front backtacking each end of seam.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 50	
	i. Turn flap down and press flat. Trim away seam allowance at front corner. Tack top corners to coat front vertically 1/4 to 3/8 inch along edge of flap. Backtack through all plies. An automatic straight tack may be used. (Do not use bartack.)	301		12-16	O silk or O nylon	O silk or O nylon	
16.	Make two lower pockets.						
	a. Seam bottom edge of double welt to top edge of front ply pocket twill cloth, and turn seam down. Position welt on front of coat according to marks on pattern. Seam through coat 1/8 inch above and below mark for pocket opening.	301	SSa-1	10-14	50	50	
	b. Cut on mark and tongue notch ends.						
	c. Turn welt and twill cloth pocket piece through opening. Fold the narrow side of welt piece up forming an upper piping 1/8 to 3/16 inch wide. Turn the wide side of the welt piece down forming the lower piping 1/8 to 3/16 inch wide. Stitch between the folds of both pipings, through the seam. The stitching shall be imbedded in the seam.	301	SSaf-2(b)	10-14	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Make two lower pockets. (cont'd)						
	d. Stitch back pocket twill cloth to cloth facing. Turn seam down. On underside of front, position top edge of facing to top edge of upper piping seam allowance and seam together from the underside. Adjust pipings, tongues, and close ends of pocket opening. Continue stitching around twill cloth pocket.	301	SSa-1	10-14	50	50	
	e. These pockets may be made with a double piped pocket machine which stitches, cuts, and turns piped edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine. A twill cloth stay or the machine manufacturers recommended pocket stay material may be used. The joining seam of the bottom piping piece shall be raised stitched through front and piping piece, and the joining seam of the top piping pieces shall be raised stitched through all plies in the closing of the top of pocket. Ends of pocket shall be securely tacked. The finished length of the pocket openings shall be 4-1/2 ± 1/8 inch.	101 and		10-14	50 or A-3 or 0 nylon		
		301		10-14	50 A-3 or 0 nylon	50 A-3 or 0 nylon	
17.	Join side body to front of coat.						
	a. Join front to side body matching notches, working in bust fullness between notches.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70	
	b. Press seam open and flat. Avoid stretching waist.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Join side body to front of coat. (cont'd)						
	c. Stitch 1/4 inch tape around each armhole beginning at the front armhole notch and finishing at back edge of side body, holding tape taut to prevent material from stretching. A 3/4 inch wide bias tape shall be sewn to front armhole from notch to raw edge of shoulder seam. This operation may be performed after the back and side body joining operation (see 23.c.) using a one-piece 1/4 inch twill tape.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70	
18.	Baste interlining to fronts.						
*	a. Baste interlining to front through both front darts to bottom of coat. Interlining shall extend well beyond the armhole and shoulder.	301 or hand			Commercial		
	b. On the inside run a permanent tack from bottom of waist dart to bottom of inside hanging pocket. Stitch must not show on outside of coat. Tack interlining to lower pocket facing.	301 or hand		2-4	Commercial		
	c. Baste across shoulder and armhole. Baste along outside of interlining to waist. Baste 1/2 inch behind fold line of lapel and down front 1/2 inch from edge.	Hand or machine			Commercial		
*	d. Position bridle tape 1/8 to 1/4 inch behind lapel breakline step at the gorge. Baste bridle tape (in a straight line) to finish 3/8 to 1/2 inch behind the breakline at a point 1 to 1-1/8 inches from bottom of lapel. Top of bridle tape shall be caught in the top collar gorge stitching. Baste tape even and smooth						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Baste interlining to fronts. (cont'd)						
	for a distance of 1-1/2 to 2 inches from gorge, then hold tape taut for a distance of 4 to 5 inches to work in not less than 3/8 inch nor more than 1/2 inch breast fullness. Baste the balance of the tape without tautness or fullness. Tape and interlining shall be stamp marked to assure amount of fullness.						
*	e. Pad each lapel of coat with six to seven rows of stitching with fullness in the interlining to roll lapels.	103 or 306	SSm-8	4-8	50		
19.	Underpress lapels and fronts, and shape lapels.						
	a. After lapels are padded, the left and right fronts of coat shall be pressed individually, on women's left and right coat front pressing machine respectively, to conform to the shape of the body. The front edge shall be straight and in accordance with front shaper.						
	b. Mark and trim lapels as indicated by shaper.						
	c. Trim 1/4 inch off interlining all around lapel and down front.						
	d. The interlining at bottom may be cut diagonally so that the bottom edge is not caught in the tape stitching.						
20.	Join facings to fronts.						
	a. Match, fit, and baste facings to coat putting in proper lapel and bust fullness. The facings shall be held slightly taut at bottom edges of foreparts.	Hand or machine			Commercial		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Join facings to fronts. (cont'd)						
	b. Position 1/2 inch tape across top of lapel to front of interlining and facing, down front, and across bottom to back edge of facing and stitch.	301	SSa-1	10-14	50	50	
*	c. Blind stitch back edge of tape to interlining of fronts and lapels and both edges of bridle tape to interlining.	103	SSm-1	3-4	50		
	d. Press edges flat and smooth, and pull basting threads. Edge seam may be pressed open, (see operation 19.a.).						
21.	Baste coat edges and tack facings to interlining.						
	Finished appearance. Edges, lapel points, and corners shall be uniformly worked out. Fullness shall be uniformly placed at lapel break to point, when basting along breakline and back edge of facing so that lapel will roll. The lower front edges shall close flat and smooth, without rolling outward.						
	a. Notch corner of lapel and trim around lapel points, bottom corners, and front edges. Turn facing, work out lapels and bottom corners of fronts.						
	b. Edge baste across top of lapel, down front, and across bottom of facing, rolling the joining seam toward the underside of lapel along lapel edge. Roll the lower part of joining seam toward the inside of the coat along the front and bottom edge of coat.	Hand or machine		6-8	Commercial		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Baste coat edges and tack facings to interlining. (cont'd)						
	c. Baste facings along lapel front (second basting) 1 ± 1/2 inch from edge, along fronts to a point in line with turn of lapel, holding lower corner of coat rolled in such a manner as to cause lower front edge of forepart to roll inward.	301 or hand			Commercial		
	d. Place a row of basting diagonally from lapel break to the point of lapel, placing fullness in lapel to allow lapel to roll.	301 or hand			Commercial		
	e. Baste along breakline of lapel, allowing fullness in facing, to permit lapel to roll.	301 or hand			Commercial		
	f. Baste back edge of facing, putting fullness over bust.	301 or hand			Commercial		
	g. Tack the back edge of left facing and lining to the interlining with one row or blindstitching from not more than 2-1/2 inches from shoulder seam to not more than 2 inches above inside pocket opening and continue the tacking along outer ply of inside pocket seam allowance and seam allowance of facing, to within 2 inches of bottom of coat (see operation 35.g.).	301 or 103 or hand	SSm-1 SSm-1 SSm-1	2-4 2-4 2-4	50 50 50	50 50	
	h. Tack the back edge of right facing and lining to interlining with one row of blindstitching from not more than 2-1/2 inches from shoulder seam to within 2 inches of bottom of coat.	301 or 103 or hand	SSm-1 SSm-1 SSm-1	2-4 2-4 2-4	50 50 50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
22.	Make backs.						
	Finished appearance. The backs shall be joined without gathers, puckers, or pleats. The right vent lining and left vent shall finish smooth and flat without puckers, gathers, or pleats.						
	a. Fold the cut darts and stitch according to notches on pattern. Taper dart 1/2 inch to 5/8 inch beyond end of slash. Press dart open and press point flat.	301	SSa-1	10-14	50	50	
	b. Join the backs. Stitch down center back seam to mark on pattern near vent. Notch left back and press seam open.	301	SSa-1	10-14	50	50	
	c. Tape back armholes with 1/4 inch twill tape starting at side back raw edge, drawing tape approximately 1/4 inch over shoulder blade area. (This operation may be performed after the back and side body joining operation, see operation 23.c.).	301	SSaa-1	8-10	50	50	
	d. Stitch 1/4 inch twill tape to back shoulder seam between notches, easing in 3/16 inch of fullness. Tape shall be positioned 1/16 inch from sewing line and shall not be caught in the shoulder seam. Press before joining shoulder seams.	301	SSaa-1	8-10	50	50	
	e. Position 3/4 inch wide strip of straight cut twill cloth flush with raw edge of neck and stitch 1/8 inch below top edge from shoulder seam to shoulder seam.	301	SSaa-1	8-10	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
22.	Make backs. (cont'd)						
	f. Mark the fold line on right vent to bottom notch of vent.						
	g. Stitch 1/4-inch tape inside of fold 1/16 inch from edge of tape. Tape shall start 3/4 inch from top of vent allowance and terminate 1/4 inch from notch for hem fold line.	301 or 401	SSaa-1 SSaa-1	10-14 10-14	50 50	50 70	
	h. Press right vent under at mark for fold line. Fold under left vent 3/8 inch from edge and baste.	Hand or machine			Commercial		
23.	Join back to side body.						
	a. Stitch back to side body matching notches, working in fullness between back notches.	301	SSa-1	10-14	50	50	
	b. Press seams open and flat. Avoid stretching waist.						
	or						
	c. 1/4 inch twill tape may be positioned and stitched to armhole as required in operations 17.c. and 22.c., across pressed open seam (23.b.) in one piece. Care must be taken not to stitch the front interlining to the tape.	301 or 401	SSaa-1 SSaa-1	10-14 10-14	50 50	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
24.	Interline bottom of coat.						
	Finished appearance. On the finished coat, the hem shall be turned up evenly all around. Right and left vent hems shall not be turned up excessively causing the coat to appear short at the center back.						
	a. Turn up hem and press. The wigan will be in two pieces. Start the wigan for the right side of coat (as worn), at the fold line of right vent with bottom edge of wigan 1/4 to 1/2 inch below the hem fold line. Fold back vent and blindstitch raw edge to coat from vent opening to hem fold line.	103 or	EFa-1	4-6	0 (silk or nylon) or 70		
		Hand or	EFa-1	4-6	A or 0 (nylon or silk)		
		306	EFa-1	4-6	0 (silk or nylon) or 70	0 (silk or nylon) or 70	
	b. Position wigan for left side of coat at seam allowance of left vent with bottom edge 1/4 to 1/2 inch below the hem fold line. Baste wigan to hem on both sides of coat from vent to front interlining. The wigan shall overlap the back edge of the front interlining 1 to 1-1/4 inches.	Hand or machine			Commercial		
	or						
	Wigan may be sewn to hem with lockstitch.	301	SSa-1	10-12	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
24.	Interline bottom of coat. (cont'd)						
	c. Blindstitch the coat hem through the wigan catching the basic fabric. The blindstitching at the hem and back right vent shall not be visible on the outside of coat.	103	EFa-1	4-6	70		
	or						
	Coat hem may be tacked to each seam allowance.	Hand or	EFa-1	4-6	A or O (nylon or silk)		
		306	EFa-1	4-6	O (silk or nylon) or 70	O (silk or nylon) or 70	
25.	Join lining front and side body to lining back.						
	Seam back lining to side body lining matching notches.	301	SSa-1	10-14	50	50	
*26.	Baste lining to coat and finish vent.						
	a. Baste pleat on each front shoulder as indicated by marks on pattern with the outside fold of pleat facing the armhole. Care must be taken to maintain the entire length of the pleat on each front shoulder.	Hand or machine			Commercial		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*26.	Baste lining to coat and finish vent. (cont'd)						
	b. Baste lining across back neck forming pleat at center back. The outside folded edge of the pleat shall face the right front of coat (as worn).	Hand or machine			Commercial		
	c. Baste back pleat from neck to top of vent.	Hand or machine			Commercial		
	d. Pleats in lining must be pressed prior to removing basting threads.						
	e. Baste lining across shoulder catching interlining and coat front, continue around armhole to darts in lining and down to bottom of inside pocket. Run another baste from below armhole down center of side body. Baste lining to coat across back shoulder at dart and down side back.	Hand or machine			Commercial		
	f. Baste lining to right vent (as worn)1/2 inch from folded edge and fell. On inside of coat overlap left cloth vent over right and baste into position making certain vents are properly aligned and will lay flat and smooth on finished coat.	Hand or machine			Commercial		
*	g. Place 1-3/8 inch machine stitch on diagonal according to marks on pattern through shell, right cloth vent, right vent lining, and left cloth vent. Vent must be finished in this sequence so that left vent lining will not be caught in the stitching.	301 or 401	SSa-1 SSa-1	10-14	50 50	50 50	
	h. Fold left vent lining under, position to left cloth vent, and top stitch 1/16 inch from the edge.	301	SSc-1	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*26.	Baste lining to coat and finish vent. (cont'd)						
*	i. Fold left lining under at top of vent completely covering the basic material and hand fell left lining to right lining diagonally down to top of vent, turn corner, and close vent 1 to 1-1/4 inches.	Hand or machine			Commercial		
*	j. Baste shield to base of armhole with center notches matching.	Hand or machine			Commercial		
*	k. Baste lining across entire sweep, being careful to allow appropriate fullness in lining.	Hand or machine			Commercial		
27.	Join shoulders.						
	a. Join shoulder seams matching front and back notches.	301 or 401	SSa-1 SSa-1	10-14	50 50	50 50	
	b. Press shoulder seams open and flat without stretching seam.						
	c. Baste front interlining and shoulder piece to back shoulder seam.	Hand or machine			Commercial		
28.	Set collar.						
	Finished appearance. The collar shall finish centered on the back seam with the fullness distributed over the shoulder to conform to and hug the neck.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
28.	Set collar. (cont'd)						
	a. Mark neck outlet on the back and front gorge 1/2 inch at the back of the shoulder seam tapering to 3/8 inch at the lapel breakline and step notch on the lapel.						
	b. Trim gorge seam of facing to correspond with neck edge of coat.						
	c. Seam top collar to front facing at gorge to a point not less than 3/4 inch back of lapel breakline.	301	SSa-1	10-14	50	50	
	d. Slash the seam allowance of the facing at the end of the stitching. A 1/4 to 3/4 inch strip of straight cut twill cloth may be stitched to front and facing gorge seams (bias portion) prior to setting the collar.						
	e. Tack gorge seam open, catching bridle tape in the tacking.	Hand or 301			50 50	50	
	f. Baste undercollar to coat, putting in fullness over the shoulder.	Hand or 301			50 50	50	
	g. Fell shoulder seam lining over front facing a distance of 1 to 1-1/4 inches from neck. Tack lining and coat to interlining of undercollar.	Hand or machine 204	LSb-1	6-8	A or C (nylon or silk)		
	or						
	Shoulder lining may be closed in one operation prior to collar setting, from neckline to armhole.	301 or 306			A or C (nylon or silk)		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
28.	Set collar. (cont'd)						
	h. Place hanger loop and size label at center back of lining and coat above tacking stitch, and stitch 3 inches across, securely catching the ends of hanger loop. The size label shall be positioned so that the printing on the label will not be covered by the collar. The hanger loop shall measure 2 ± 1/2 inches from outside edge to outside edge in the finished coat.	Hand or machine 301					
	i. Fell the lower edge of undercollar to coat by hand or machine. The raw edge of the undercollar shall be inclosed within the felling.	Hand or	LSa-1	8-12	C silk or C nylon		
		machine (simulated hand felling) or	LSa-1	6-10	A silk or B nylon		
		306	LSa-1	8-12	O silk or O nylon	O silk or O nylon	
	j. Blind tack corners of collar and lapels. The tacking shall not show on the outside of coat.	Hand		6-8	C silk or C nylon		
	k. Fell the lower edge of top collar from gorge seam to gorge seam by hand.	Hand		8-10	C silk or C nylon		
	or						
	Stitch lower edge of top collar from gorge seam to gorge seam by machine.	301	LSa-1	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
29.	Stitch front edges and collar. Stitch edges of lapels, fronts and collar 1/16 to 3/32 inch from edge, stitching to extend across bottom the width of the facings. The facing shall not hang below the outside of the front at the bottom.	301 shows finished seam	SSe-2	10-14	O silk or nylon 50	O silk or nylon 50	
30.	Set shoulder loops. Finished appearance. The shoulder loops shall be of a uniform length and setting and shall lay flat and smooth. Baste or stitch loop to shoulder at armhole. Trim even with armhole. Point of loop shall extend 1/8 ± 1/16 inch beyond raw edge of the gorge outlet and 1/4 to 3/8 inch in front of shoulder seam. The back edge of loop shall finish 3/4 ± 1/16 inch back of the shoulder seam at armhole.	Hand or 301	SSa-1	10-14	50 50	50 50	
31.	Set in sleeve. Finished appearance. The sleeves shall set uniformly with fullness at armhole distributed without pleats or puckers. The sleeves shall hang alike with the front of each in the same relative position to the back of the pocket flaps. Front and back shall have a rolled effect. Sleeves may be pressed and rolled prior to hanging to facilitate check on the hang of sleeve.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
31.	Set sleeves. (cont'd)						
	Set sleeves matching front sleeve notch with front armhole seam distributing the sleeve head fullness between notches and catching the end of shoulder loops in the seam.	301 or 401	SSa-1 SSa-1	12-16 12-16	50 50	50 70	
32.	Press armhole seam.						
	Finished appearance. The armhole seam pressing shall not stretch or distort the armhole.						
	Press fullness of sleeve flat all around the armhole. The portion of the shoulder loop seam shall not be pressed back. Shoulder loop shall remain smooth and flat. Press seams open across top from 1 ± 1/4 inches above back arm seam to not less than 3 or more than 4 inches forward of shoulder seam, or the seam across top may be pressed toward sleeve in the same direction as loop.						
33.	Set shoulder pads.						
	a. Center pads between felt shoulder piece and shoulder interlining on each shoulder with edge of pad even with edge of armhole and tack center of pad to seam allowance.	204 or hand		4-6 4-6	Commercial Commercial		
	b. Tack neck end of pads to the shoulder in front and back of seam allowance.	Hand		2-4			

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
34.	Baste and tack armholes.						
	a. Baste balance of shoulder lining back over front. Baste around outside armholes, positioning lining, shoulder pad, and back of shoulder in place. Baste fullness of back lining in place; or back part of armholes may be basted from the lining side.	Hand or 301			Commercial		
	b. Tack all around armhole by hand or machine catching the shields at base of armhole.	301 or hand		4-6 4-6	30 30	30	
	NOTE 1: When armhole is tacked by machine, a loosely formed and elastic stitch shall be used, and operation 34.c. may be omitted.						
	NOTE 2: When tacking is done by hand, the tacking shall be backstitched every other stitch from front notch, around top of armhole to back notch.						
	c. Tack across base of armhole from sleeve notch on front to side back seam.	301	SSa-1	4-6	30	30	
	d. Trim away excess lining and interlining.						
	e. Tack sleeve head wadding to armhole 7 inches in front and 5 inches in back of shoulder seam. The sleeve head wadding shall be positioned with folded edge adjacent to edge of armhole tacking cloth side against sleeve and in such a manner as to cause it to fold on itself. The tacking shall be adjacent to armhole seam. When armhole is tacked by machine, the sleeve head wadding shall be attached in the armhole tacking operation.	Hand or 301		4-6 4-6	30 white 30 white	30 white	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
35.	Complete hand felling.						
	a. Fell lining all around armholes and backstitch pit of armhole from forearm seam of sleeve to back side body seam. The sleeve lining seams shall be turned toward the undersleeve.	Machine (simulated hand felling)		6-10	A silk or O nylon		
	or	306 or hand	SSa-1	10-14 6-10	50 C silk or C nylon	50	
	The sleeve lining may be stitched to the armhole on the inside from forearm seam of sleeve to the back arm seam across undersleeve.	301 and machine (simulated hand felling)	SSa-1	10-14 6-10	50 A silk or O nylon	50	
		or 306 and hand	SSa-1	10-14 6-10	50 C silk or C nylon	50	
	b. Sew lining at shoulder.	301 or 306		10-14 6-10	50 A silk or O nylon	50	
	c. Fell corners of lining and facing, at bottom of coat.	Hand		6-10	A or C silk A or C nylon		
	d. Fell bottom of lining to coat hem.	103 or 306		6-10	A silk or O nylon		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
35.	Complete hand felling. (cont'd)						
	e. Fell the sleeve lining turn-up to the sleeve 1 inch from the bottom edge.	Hand or 103 or 306		6-8 6-8	A or C silk A or C nylon O silk or O nylon	O silk or O nylon	
	f. Tack bottom edge of armhole shields on the underside to lining.	Hand		6-8	A or C silk or A or C nylon		
	g. In lieu of operations 21.g. and 11.i. , front edge of inside chest pocket may be tacked by hand. Tack through facing pocket seam allowance and interlining, from corner of pocket opening and down for a distance not less than 5 inches.	Hand		2-4	A or C silk or A or C nylon		
36.	Clean coat.						
	a. Remove basting threads.						
	b. Ends of stitching shall be trimmed and loose threads removed from the coats.						
	c. All spots, stains, and shade or size markings shall be removed without damage to the material.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
37.	Mark and make buttonholes.						
	a. Press right front prior to the buttonhole operation.						
	b. Mark right front for four buttonholes as indicated by marks on pattern for top and bottom buttonholes. The remaining two buttonholes shall be evenly spaced between top and bottom buttonholes. NOTE: Caution should be exercised that marking be in strict adherence with top and bottom buttonhole as marked on pattern. On finished coat the top button and buttonhole must not be lower than top buttonhole on pattern (0 tolerance) nor higher than mark on pattern by 1/8 inch.						
*	c. Make four buttonholes in right front as marked with the inside edge of the eyelet 3/4 + 0, -1/8 inch from the finished edge of the coat. The cut of the finished buttonhole after tacking shall measure 3/4 + 1/8 -0 inch. (see 3.6.2).	Machine or		63-70 per 1 inch	C or B nylon	B or B nylon	
		hand		56-63 per 7/8 inch buttonhole	B nylon		
	d. Bartack ends of buttonholes with a 1/4 inch bartack (see 3.6.2).	Machine or		21 per bartack	B silk or B nylon	B silk or B nylon	
		hand		6-8 per bartack	10 silk or 10 nylon		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
38.	Press coat. Finished appearance. The coat shall be pressed smooth and flat, without any gloss or pressing impressions. The top of sleeves shall be blocked and pressed having a rolled effect at front and back. The left front edge below the lower button shall hang in a straight vertical line when buttoned on a form. a. Place coat on hanger after first pressing operation until completion of pressing. b. Press edges (edge pressing machine) of lapels, fronts, collars, and bottom of coat. c. Press right and left fronts on women's right and left front machine respectively. d. Press balance of fronts, side seams, and back on body machine. e. Press collar on collar machine stretching outer edge of collar over shoulder area when required. The pressed crease at breakline of lapel shall extend 2 to 2-1/2 inches below the gorge seam. The remainder of the lapel shall be roll pressed. f. Care shall be exercised that collar and lapels are pressed in accordance with the width prescribed on the finished collar lapel shaper. g. Press armhole and shoulders on armhole machine. Shoulders may be pressed on a shoulder machine.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
38.	Press coat. (cont'd)						
	h. Press armhole solid from the inside, creasing armhole from not less than 1/2 inch above backarm seam to not less than 4 inches below shoulder seam. The armpit and back of armhole shall be held short and pressed flat.						
*	i. Roll press sleeves, do not crease.						
39.	Finish pressing.						
	a. Press coat lining and shields smooth.						
	b. Remove gloss, wrinkles, creases, and all pressing impressions.						
	c. Block armhole and shrink top sleeve.						
	d. Brush coat and examine.						
	e. Press any wrinkles missed or caused by previous pressing operations.						
40.	Mark coat for buttons and attach button to shoulder loop.						
	a. Mark the location of the four buttons on the left front of coat as indicated by patterns, to correspond with buttonholes on right front. Buttons shall be sewn 3/4 to 7/8 inches from front edge. Buttons shall be in vertical alignment.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
40.	Mark coat for buttons and attach button to shoulder loop. (cont'd)						
	b. Fasten a button through each shoulder loop eyelet with a toggle. The button shall be attached with the eagle in upright position, with the spread wings of the eagle in line with shoulder seam, the head in direction of the back edge of the loop. The rim of the button shall be 1/8 inch away from edge of collar, plus 0, minus 1/8 inch tolerance.						
41.	Sew on buttons.						
	Finished appearance. The buttons shall be attached with the eagle in upright position and when sewn by hand, the sewing shall be backstitched with not less than two stitches and with the ends of thread hidden.						
	Sew on buttons for fronts. Sew a 30-line button on left front at each mark through front, interlining, and facing.	301 or 101 or hand		14-16 per button 14-16 per button 4-6 per button double thread	30 30 30	30	
		or 801 (see fig. 3)		7 (min) per button (1 deep set)	4 nylon		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
42.	Sew snap fastener to shoulder loop.						
	Sew a male part of the snap to underside of shoulder loop in line with center of loop 1-1/4 ± 1/8 inches from end of point. Sew a female part of the snap to front of coat to correspond with male snap. When the snap fasteners are engaged the shoulder loops shall lie flat and smooth without twists, pleats or bulges.	301 or 101 or hand		11 per fastener 20-22 per fastener 14-16 per fastener	50 50 50	50	
43.	Tack pocket flap.						
	Spot tack the lower back corner of each pocket flap 1/16 inch to 1/8 inch from back and bottom edges to the coat. The tack shall not show through on the outside of the flap. After tacking, the flap and front of coat shall be smooth and flat without twists, pleats or bulges. Tacking shall be according to good commercial practice.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished measurements of the coat shall conform to the measurements shown in table III.

TABLE III.

Measurements in inches for women

	SIZE									
	4	6	8	10	12	14	16	18	20	Tolerance
1/2 bust 17-3/4		18-1/4	18-3/4	19-1/4	20	20-3/4	21-1/2	22-1/2	23-1/2	± 3/8
Cross back	13-5/8	13-7/8	14-1/8	14-3/8	14-3/4	15-1/8	15-1/2	16	16-1/2	± 3/8
1/2 waist	13-1/4	13-3/4	14-1/4	14-3/4	15-1/2	16-1/4	17	18	19	± 3/8
1/2 waist plus sizes	13-3/4	14-1/4	14-3/4	15-1/4	16	16-3/4	17-1/2	18-1/2	19-1/2	± 3/8
1/2 sweep	20-1/4	20-3/4	21-1/4	22-1/4	23	23-3/4	24-1/2	25-1/2	26-1/2	± 1/2
1/2 sweep plus sizes	19-3/4	20-1/4	20-3/4	21-1/4	22	22-3/4	23-1/2	24-1/2	25-1/2	± 1/2
SLEEVE LENGTH:										
Short	21-3/4	22	22-1/4	22-1/2	22-3/4	23	23-1/4	23-1/2	± 1/4	
Regular	22-3/4	23	23-1/4	23-1/2	23-3/4	24	24-1/4	24-1/2	24-3/4	± 1/4
Long 24-1/4		24-1/2	24-3/4	25	25-1/4	25-1/2	25-3/4	26	26-1/4	± 1/4
Extra long			26-1/4	26-1/2	26-3/4	27				± 1/4
BACK LENGTH:										
Short	25-3/4	26	26-1/4	26-1/2	26-3/4	27	27-1/4	27-1/2	± 1/4	
Regular	26-3/4	27	27-1/4	27-1/2	27-3/4	28	28-1/4	28-1/2	28-3/4	± 1/4
Long 28	28-1/4	28-1/2	28-3/4	29	29-1/4	29-1/2	29-3/4	30	± 1/4	
Extra long			29-3/4	30	30-1/4	30-1/2				± 1/4

TABLE III. (cont'd)

Measurements in inches for juniors

	SIZE									
	3	5	7	9	11	13	15	17	19	Tolerance
1/2 bust	17-3/8	17-7/8	18-3/8	18-7/8	19-5/8	20-3/8	21-1/8	21-7/8	22-5/8	± 3/8
Cross back	13-3/8	13-5/8	13-7/8	14-1/8	14-1/2	14-7/8	15-1/4	15-5/8	16	± 3/8
1/2 waist	12-7/8	13-3/8	13-7/8	14-3/8	15-1/8	15-7/8	16-5/8	17-3/8	18-1/8	± 3/8
1/2 waist plus sizes	13-3/8	13-7/8	14-3/8	14-7/8	15-5/8	16-3/8	17-1/8	17-7/8	18-5/8	± 3/8
1/2 sweep	19-3/8	19-7/8	20-3/8	20-7/8	21-5/8	22-3/8	23-1/8	23-7/8	24-5/8	± 1/2
1/2 sweep plus sizes	19-7/8	20-3/8	20-7/8	21-7/8	22-5/8	23-3/8	24-1/8	24-7/8	25-5/8	± 1/2
SLEEVE LENGTH:										
Extra short				22-3/8	22-5/8	22-7/8	23-1/8	23-3/8	23-5/8	± 1/4
Short	22	22-1/4	22-1/2	22-3/4	23	23-1/4	23-1/2	23-3/4	24	± 1/4
Regular	22-5/8	22-7/8	23-1/8	23-3/8	23-5/8	23-7/8	24-1/8	24-3/8		± 1/4
Long	24-1/8	24-3/8	24-5/8	24-7/8	25-1/8	25-3/8				± 1/4
BACK LENGTH:										
Extra short				24-3/8	24-5/8	24-7/8	25-1/8	25-3/8	25-5/8	± 1/4
Short	24-5/8	24-7/8	25-1/8	25-3/8	25-5/8	25-7/8	26-1/8	26-3/8	26-5/8	± 1/4
Regular	25-7/8	26-1/8	26-3/8	26-5/8	26-7/8	27-1/8	27-3/8	27-5/8		± 1/4
Long	27-1/8	27-3/8	27-5/8	27-7/8	28-1/8	28-3/8				± 1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

3.8.1 Methods of measuring. The coat shall be buttoned, placed flat upon a table, and measured from folded edge to folded edge unless otherwise indicated.

1/2 bust	- Across front at underarm seam.
Cross back	- 4-1/2 inches below neck edge of undercollar (may be measured on form) from sleeve setting seam to sleeve setting seam.
1/2 waist	- 1-1/4 inch above lowest button.
1/2 sweep	- Along bottom hemmed edge making certain that back vent and overlap are laying flat and closed.
Back length	- Along center back seam from neck edge of undercollar to bottom of coat.
Sleeve length	- Down center of sleeve from sleeve setting seam at shoulder to bottom of sleeve.

3.9 Workmanship. The finished coat shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the government to acceptance of defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the end item examination defects specified in MIL-STD-1608

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

as modified by 4.4.3 of this document. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

* 4.4.2 In-process inspection. Inspection shall be made of the following operations to establish conformance to specified requirements. Wherever nonconformance is noted, correction shall be made to the items affected, the lot in progress, and to the operation. Parts which cannot be corrected shall be removed from production.

a. Visual and dimensional examination of the working patterns to determine that they conform to the Government patterns in all respects (see 3.5).

b. Visual and dimensional examination of the cut parts to determine that they are properly cut with respect to size and material directional requirements (warp and filling), that location marks and notches on the parts are located correctly, and that parts containing material defects and damages have been removed (see table II, operations 1 and 2.).

* c. Visual examination of side front, side back, and side body seams to insure that the correct seam allowance is being taken and that the seam allowances are consistent in width through the waist and entire length of seam. 1/

* d. Visual examination of cut parts during assembly of the coat to determine proper shade matching (see operation 3., table II).

* e. Visual examination of pressed fronts to determine that pressing is performed correctly and proper pressing machine is used (see operation 19.a., table II.).

* f. Visual examination of collar gorge seam to determine seam is tacked open and the bridle is caught in the tacking (see operation 28.e., table II). 1/

* g. Visual examination of sleeves (prior to basting lining to armhole, side seams, and bottom of coat) to determine that sleeves are set uniformly with fullness at armhole distributed without pleats or puckers (see table II, operation 31.). 1/

1/ For this examination the contractor shall establish an inspection station. Periodic examination shall be made during each work shift to determine that the requirements are being met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

4.4.3 Point count inspection. Sampling and inspection provisions for end item examination, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1608 except that for end item examination, the following defects and point values shall be added to or substituted for, as applicable, the defects and point values listed in MIL-STD-1608.

Examine	Defect	Classification point value
a. Cleanness.		
	1. Spot or stain on outside:	
	(a) Up to 1/4 inch inclusive in longest direction	2
	(b) More than 1/4 inch in longest direction	3
	2. Spot or stain on inside.	1
b. Shoulder loop.		
	1. Point of loop extending beyond edge of gorge outlet by more than 3/16 inch or less than 1/16 inch.	1
	2. Back edge of loop more than 13/16 inch from shoulder seam at armhole; point of loop back of seam or point of loop more than 3/8 inch forward of shoulder seam.	1
	3. Interlining not caught in seaming of loop.	1
	4. Other than one piece construction.	1
	5. (a) Male part of snap 1/4 inch or more off center, or less than 1-1/8 or more than 1-3/8 inches from end of point.	1
	(b) Female snap not aligned with male snap.	1
	6. Position of shoulder loop button from collar edge not as specified:	
	(a) Partially covered by collar edge (half of button or less).	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification point value
b. Shoulder loop. (cont'd)		
	(b) Button more than half covered by collar edge.	2
	7. Position of eyelet not as specified.	1
	8. Misplaced, i.e., shoulder seam exposed or loop will not be flat when snapped causing bulge or twist.	2
c. Inside chest pocket.		
	1. Opening not extending into facing, or extending into side body.	1
	2. Tacking along front edge of twill cloth pocket through facing and interlining (hand) extending for a distance of less than specified.	1
	3. Stay piece not extending to armhole seam or stay piece not stitched to lining.	1
*d. Vent.		
	1. Felling on bottom corners of lining and vent omitted or insecure.	2
	2. Diagonal stitching across top of vent:	
	(a) Omitted.	2
	(b) Not full width of left back seam allowance.	1
	(c) Right vent not positioned squarely over left vent underlay prior to stitching.	2
	(d) Puckers above vent stitching on right side or at top of vent on left side.	2
	(e) Vent stitching stitched through lining on left side (not as specified).	3
	3. Vent stitched closed.	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification point value
*d. Vent. (cont'd)	4. Right vent edge stretched causing vent to spread open.	3
	5. Right vent edge crooked or irregular, left lining tight, short or twisted, causing fullness on outside.	2
	6. Right vent 1/4 inch or more longer or shorter than left vent or bottom turnup exposed or visible on right front edge.	1
*	7. Hem turned up excessively across right and left vent causing the coat to appear short at center back.	3
e. Side body seams, center back seam, and darts (front bust and waist darts and back neck darts).		
	1. Seam puckered.	3
	2. Seam full.	2
	3. Seam twisted (i.e., having a diagonal twist on front or back of coat).	3
f. Armhole or shoulder.		
	1. Tape not stitched as specified to armhole.	2
	2. Excess fabric resulting in fullness or puckering in any of the following locations:	3
	(a) Over shoulder in back area (b) In collar or shoulder area (c) Between label and sleeve seam.	
	3. Puckering on front or back of coat around armhole from back seam to forearm seam.	3
	4. Stretched affecting appearance.	3
	5. Crooked seam.	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification point value
f. Armhole or shoulder. (cont'd)		
	6. Tape around armhole stretched while stay tape is being sewn causing extra length and distortion along armhole circumference.	3
g. Darts.		
	1. Length of darts uneven in length by 1/4 inch or more.	3
	2. Cut out darts not pressed open as specified.	2
h. Collar.		
	Back end of gorge seam stitched less than 3/4 inch back of lapel breakline.	1
i. Bridle tape.		
	1. Bridle tape not held taut causing breakline not to finish flat.	3
	2. Bridle tape misplaced at gorge:	
	(a) More than 3/8 inch behind lapel breakline.	3
	(b) More than 5/8 inch behind lapel breakline.	*
	(c) Onto or extending beyond breakline on lapel side.	*
*	3. Bridle tape misplaced at bottom lapel breakline:	
	(a) More than 5/8 inch behind breakline.	3
	(b) More than 7/8 inch behind breakline.	*
	(c) Onto or extending beyond breakline on lapel side.	*
	(d) Not within 1 to 1-1/8 inches from bottom of lapel.	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification point value
j. Sleeve.		
	Sleeve lining shall extend no less than 9/16 inch above top of sleeve.	1
k. Pocket flaps.		
	1. Finished width or length varying more than 1/8 inch from finished pocket flap shaper.	3
	2. The back edge of pocket flap finishing more than 3/16 inch in front or back of front side body seam.	3
l. Buttons.		
	Top or bottom varies from marks on pattern more than 1/8 inch.	3

* 4.4.4 Palletization inspection. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be the expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

5.1.1 Level A.

5.1.1.1 Folding. Each coat shall be laid back down and a paperboard insert conforming to figure 2 placed in the coat so as to fit into the collar and shoulder area. The buttonhole front shall overlap the button front. The width of the insert may be reduced to accommodate the smaller size coats. Fold in the sleeves so that the ends rest over the pockets. The bottom shall be folded up over the front so that the folded coat measures not more than 19 by 16-1/2 inches.

* 5.1.1.2 Intermediate packing. Five folded coats of one type, class, and size only, stacked one on another and alternated collar to bottom, shall be placed in an intermediate fiberboard box conforming to style FTC, type CF, variety SW, class domestic, grade 175 of PPP-B-636. Inside dimensions of the box shall be 19 inches in length, 16-1/2 inches in width, and 3-3/4 inches in depth. Three ounces of naphthalene flakes shall be uniformly distributed throughout the contents of each box except when coats are made from cloth pretreated with moth repellent. Each box shall be closed in accordance with the appendix of PPP-B-636.

* 5.1.2 Commercial. Coats shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Twenty coats of one type, class and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate packs shall be packed flat, four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 21 inches in length, 18-1/2 inches in width, and 17 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with the applicable provisions of MIL-STD-1608. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of the same class may be packed within the same container. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Twenty coats of one type and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A intermediate packs shall be packed flat four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 21 inches in length, 18-1/2 inches in width, and 17 inches in depth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with the applicable provisions of MIL-STD-1608. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with the applicable requirements of MIL-STD-1608.

* 5.2.3 Commercial. Coats preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), coats, packed as specified in 5.2.2 and 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type 1 (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 90 in accordance with appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, intermediate packs and shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

* 5.4.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes of the same type and class, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches, with the words "MIXED NSN's" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and NSN's contained therein.

6. NOTES

6.1 Intended use. The coats are intended for wear by female personnel of the Department of the Army as part of the service uniforms and for Junior ROTC.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type, class, and size required (see 1.2).
c. When a first article is required (see 3.1.2, 4.3 and 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. Type and class of unit load required (see 5.2.1).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

6.3 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

* 6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.2).

6.6 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuraies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:

Army - MD
DLA - CT

Preparing activity:

Army - GL

Project No. 8410-A605

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.


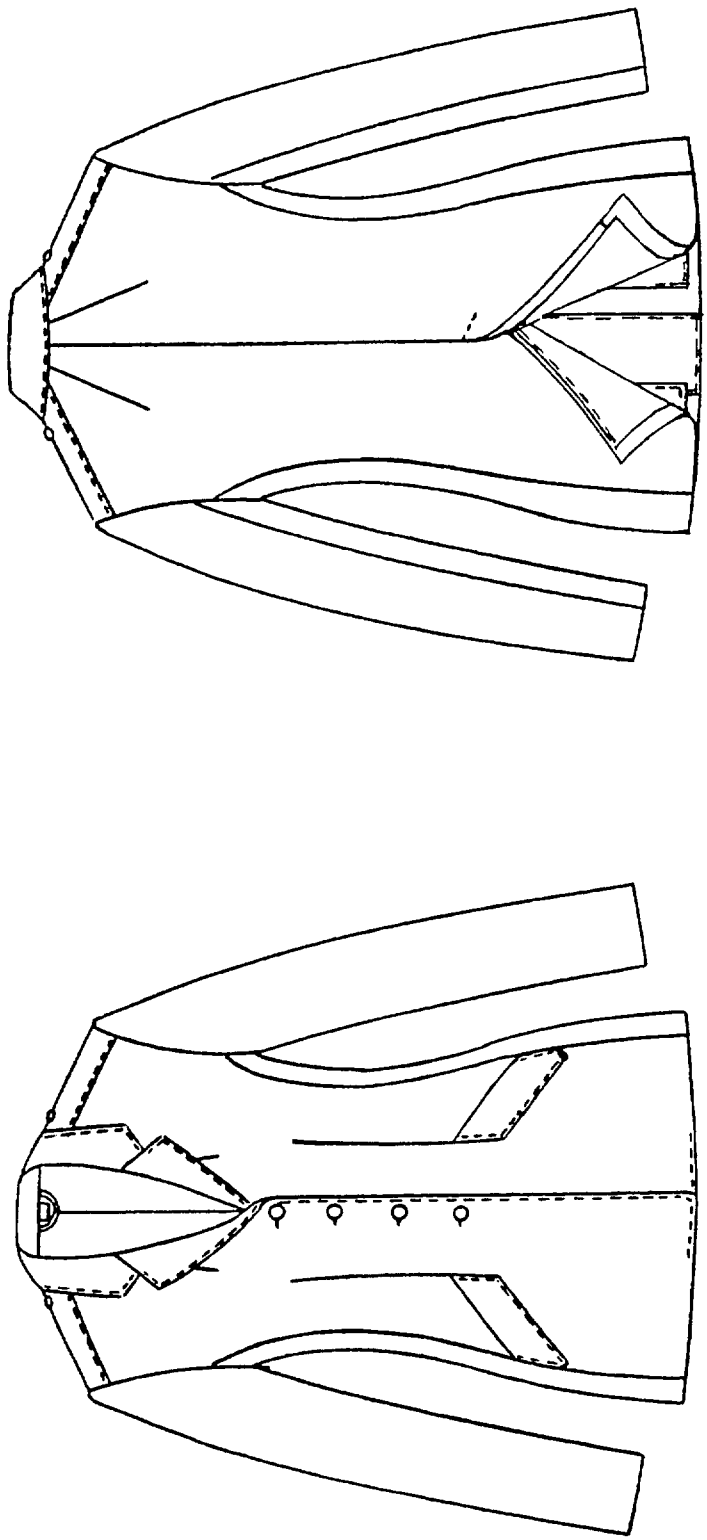


FIG. 1 - COAT, WOMAN'S: CLASSIC DESIGN, POLYESTER/WOOL

2-1-1534

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

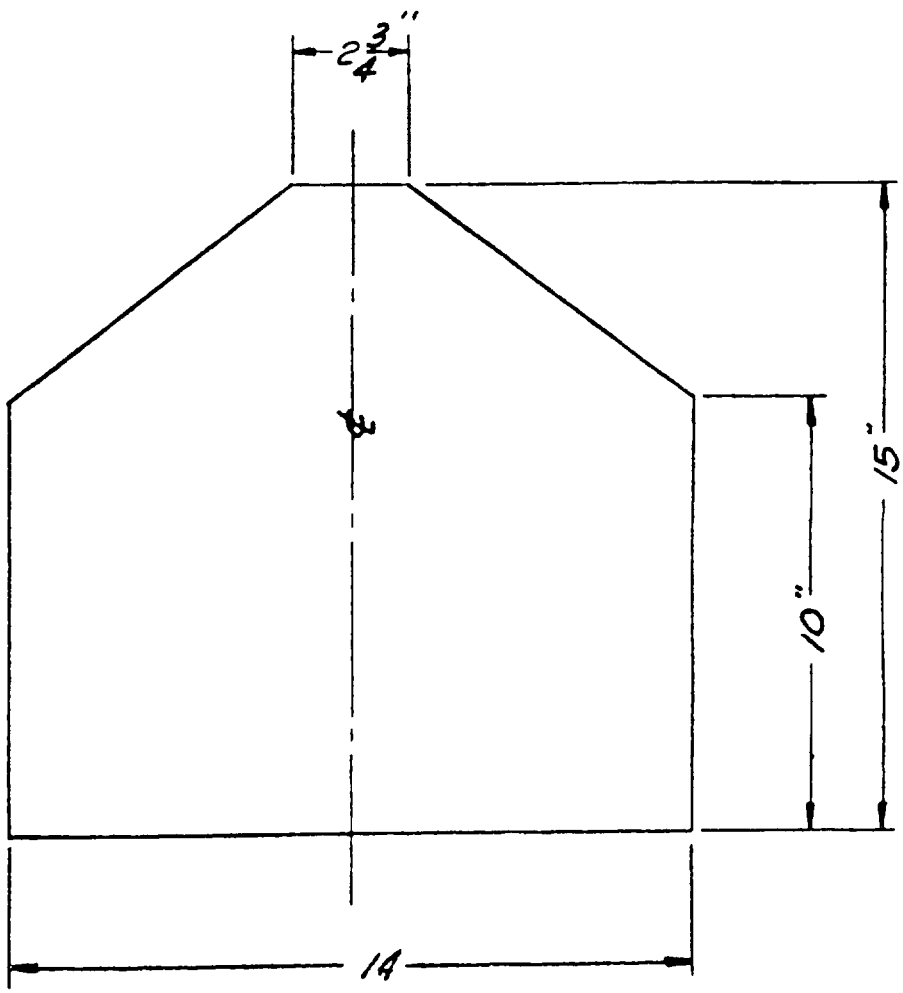


PAPERBOARD .032" THICK
ALL MEASUREMENTS ARE APPROXIMATE

FIGURE – 2 INSERT, PAPERBOARD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

Stitch class 800 - This class of stitch shall be formed with one or more needle threads and has for a general characteristic that the thread does not interloop with itself or any other thread or threads. The thread is passed completely through the material by means of a double pointed center eye needle and returned by another path. This class of stitch simulates hand stitching.

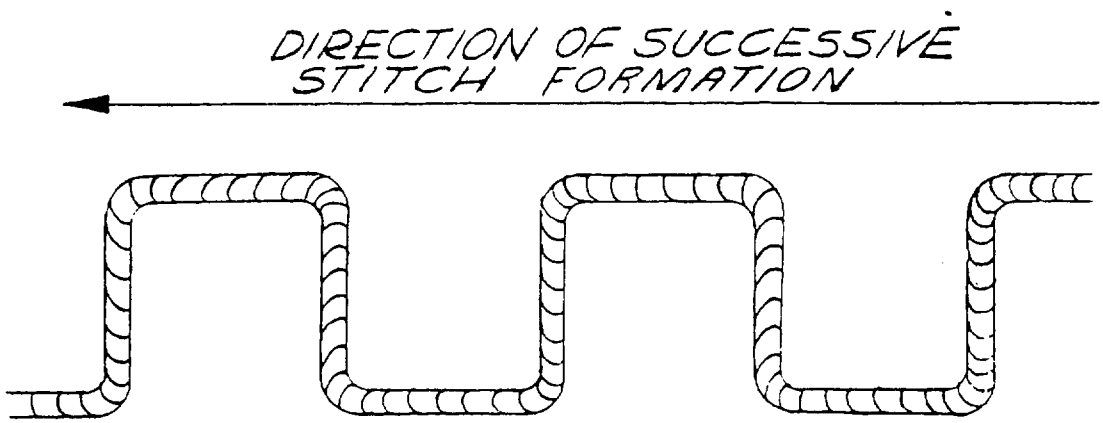

This type of stitch shall be formed with one needle thread which is passed completely through the material and returned by another path after the material has been moved forward one stitch length.

FIGURE-3-STITCH TYPE 801

2-1-79 B

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-44101A(GL)	COAT, WOMAN'S: CLASSIC DESIGN, POLYESTER/WOOL

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP-1, Feb 86

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:53Z
Check the source to verify that this is the current version before use.