INCH-POUND

MIL-C-44111B
28 December 1990
SUPERSEDING
MIL-C-44111A
31 July 1987

MILITARY SPECIFICATION

COAT, MATERNITY, UTILITY WORK UNIFORM

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of maternity coat for the utility work uniform made of poplin cloth, woodland camouflage pattern.

1.2 Classification. The coat shall be of the sizes listed in table I as specified (see 6.2).

TABLE I. Schedule of sizes

Short	Regular	Long
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE I. Schedule of sizes (cont'd)

Short	Regular	Long
16	16	16
18	18	18
20	20	20
22	22	22

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50198 - Thread, Gimp, Cotton, Buttonhole
A-A-50199 - Thread, Polyester Core: Cotton- or Polyester-Covered
A-A-203 - Paper, Kraft, Untreated
V-B-871 - Button, Sewing Hole, and Button, Staple (Plastic)
V-T-276 - Thread, Cotton
DDD-L-20 - Label: For Clothing, Equipage and Tentage (General Use)
PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078 - Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-C-43468 - Cloth, Camouflage Pattern, Wind Resistant Poplin, Cotton

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595 - Colors Used in Government Procurements
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Color Card of America

Department of Defense Standard Shades for Buttons

(Color cards may be available from the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Test Method 88B - Smoothness of Seams in Fabrics After Home Laundering

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, P.O. Box 12215, Durham, NC 27709.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material. The basic material shall be wind resistant cotton poplin cloth dyed in a woodland camouflage pattern conforming to type III of MIL-C-43468.

3.3.2 Thread and gimp.

* 3.3.2.1 Thread. The thread shall be polyester core, cotton-covered or polyester-covered conforming to A-A-50199, ticket Nos. 30, 2 or 3 ply; 50, 2 ply; and 70, 2 ply, except that cotton thread conforming to V-T-276, ticket No. 70, 2 ply may be used to serge facings and fly. The threads shall be dyed Camouflage Green 483 approximately color chip 34094 of FED-STD-595.

3.3.2.2 Gimp. The cotton gimp for reinforcing buttonholes shall be Camouflage Green 483 approximately color chip 34094 of FED-STD-595 and shall conform to type I or II, size No. 8 of A-A-50198.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the currentversion before use.

3.3.2.3 Colorfastness. The dyed thread and gimp shall show fastness to laundering equal to or better than the standard sample. When no standard sample is available, the dyed thread and gimp shall show "good" fastness to laundering.

3.3.3 Labels. Each coat shall have a size label (class 2) and either a combination identification and instruction label (class 15) or separate identification (class 1) and instruction (class 3) labels conforming to type VI of DDD-L-20. The labels shall show fastness to laundering. The color of the finished labels shall be medium green and shall approximate cable number 70034, 70130 or 70131 of the Standard Color Card of America. The following information shall be included in the printing required by DDD-L-20:

Item description:

COAT, MATERNITY, UTILITY WORK UNIFORM

Body of instructions:

1. Wear outside of slacks.
2. Adjust closures to ventilate; avoid overheating of body.
3. Machine washing. Use Permanent Press Cycle. Wash in warm water with mild detergent.
4. Hand washing. Wash in warm water using mild detergent. DO NOT WRING OR TWIST. Rinse in clean warm water.
5. DO NOT USE CHLORINE BLEACH OR STARCH.
6. Dry at low heat (do not exceed 130°F). After drying, tumble at room temperature for 10 minutes. Remove immediately from dryer. To drip dry, remove from water and place on rustproof hanger.

3.3.4 Buttons. The buttons shall conform to type II, class D, style 26, 30-line of V-B-871. The buttons shall have a dull finish, and the color shall be shade Olive Green, BP Cable 62016 as specified in the DoD Standard Shades for Buttons.

3.4 Design. The design is a single-breasted coat style with collar, two patch pockets with flaps, a straight cut bottom, and side pleats with tabs. The coat has a fly front and sleeves with tabs.

3.5 Figure. Figure 1 is furnished for information only. If there are inconsistencies between the written specification and the figure, the written specification shall control.

3.6 Patterns. Standard patterns, which provide an allowance of 3/8 inch for single needle and 1/2 inch for shoulder, backarm, sleeve setting, side and underarm seams, except as otherwise indicated, will be furnished by the Government to the contractor for cutting working patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

3.6.1 List of pattern parts. The components of the coat shall be cut from material in accordance with pattern parts as specified in table II.

TABLE II. Pattern parts

Material	Pattern nomenclature	Cut parts
Basic material	Front	2
	Back	1
	Collar 1/	2
	Top sleeve	2
	Undersleeve	2
	Sleeve tab	4
	Pocket patch	2
	Pocket flap	2
	Left front fly	1
	Side tab	4

1/ Collar may be cut in one piece with seam allowance along top edge deducted.

3.7 Construction.

3.7.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in table III are those covered by FED-STD-751. Whenever two or more methods, seams or stitching types are given for the same part of the operation, any one of them may be used. When stitch type 401 is used, the looper (under-thread) shall be on the inside of the coat. Unless otherwise specified, double needle stitching shall be 3/16 to 1/4 inch gage with the outer row of stitching 1/16 inch from edge on outside of coat. The guides and knives on the overedge machines shall be set to trim only the ravelled ends of the fabric. Seam allowances shall be maintained with seams sewn so that raw edges, run-offs, twists, pleats, puckers, or open seams will not result. All seams shall start and finish evenly. Seams required to be worked out having a depth between the fold of 1/8 inch or more shall be considered a defect.

3.7.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/4 inch, except where ends are turned under or caught in other seams or stitching. Ends of the continuous line of stitching shall be overlapped not less than 1/2 inch, except on labels where a minimum of three stitch overlap is required. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

3.7.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area and continue over the defective area a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.7.1.2 Types 101, 401, 503, and 504 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.7.1.1.1a and 3.7.1.1.1b. Repairs to stitch type 401 shall be accomplished by use of stitch type 301, except when used for eyelets.

3.7.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table III.

3.7.3 Buttonholes.

3.7.3.1 Eyelet-end tapered bar. The buttonholes in the pocket flaps, sleeve tabs, cuffs, side tabs, left front, and left front fly shall be eyelet-end tapered bar type worked over gimp specified in 3.3.2.2 with not less than four tacking stitches at bar end catching gimp ends (not counting crossover stitch). The purling shall be on the outside of sleeve and panel tabs and between front facing and front plies. Left front lapel buttonhole purling shall be on the outside of coat. The cut lengths shall be 3/4 to 7/8 inch, unless otherwise indicated in table III. The buttonholes shall be cleancut with the stitching securely caught in the fabric.

3.7.4 Bartacks. Bartacks shall measure 1/4 inch to 1/2 inch long and shall be free from thread breaks and loose stitching.

3.8 Manufacturing operations requirements. The coat shall be manufactured in accordance with the operation requirements specified in table III. The contractor is not required to follow the exact sequence of operations. Any basting or holding stitching required to facilitate manufacture is permissible provided the thread is removed or does not show on the finished coat, except on pockets which may be prehemmed.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T23:58Z
Check the source to verify that this is the current version before use.

* 3.8.1 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table III, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a Government furnished shaper pattern is forwarded, the component shall conform to that pattern.

3.9 Finished measurements. The finished measurements shall be as shown in table IV. All tolerances shall be ± 1/2 inch, except that the tolerance for the collar shall be ± 1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut coat. a. Cut coat in strict accordance with patterns furnished which show size, shape, directional lines, placement of pockets, and notches for the proper assembling of all parts. b. Cut top collar with long dimension across the material. The undercollar may be cut on the warp or filling direction. When option to cut one piece collar is used, the long dimension shall be across the material. c. Cut all parts of the coat out of one piece of material except the undercollar, sleeve bindings and left front fly, which may be cut from ends. d. Cut sleeve binding from basic material, to finish 1/2 to 5/8 inch wide and of sufficient length to bind the sleeve opening with the long dimension cut in the warp direction; or the binding may be strip-cut (warp direction) and placed on rolls.						
2.	Replacement of damaged parts. a. Care shall be exercised during the spreading, cutting, and manufacturing operations to ensure that material defects and damages as classified in 4.4.2.1 are excluded and replaced with nondefective material.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking. a. Mark, ticket, or bundle all component parts of the coat, except those parts cut from ends to ensure correct size, proper assembly, and uniform shade throughout the coat. b. Any method of marking may be used except: (1) Metal fastening devices. (2) Sew-on tickets. (3) Adhesive type tickets that leave traces of adhesive on the material after removal of the tickets. c. The use of an ink pad numbering machine, rubber stamp, or pencil will be acceptable provided the numbers do not show through the outside of the coat and the numbers are covered by the seam allowance.						
4.	Labeling. Sew labels to coat on all four sides with stitching not more than 3/16 inch from edge of label. Stitching shall not be through writing on label. The labels shall be located as follows: a. Identification label. On inside of left front with the label stitching covered by lower pocket. b. Size. On center back, 1/2 to 3/4 inch down from collar joining seam or top edge may be caught securely in undercollar joining seam. The label shall be toward the wearer in the finished coat and centered (±1 inch off center tolerance).	301	LSbj-1	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Labeling. (cont'd)						
	c. Instruction. On inside of right front with the label stitching covered by lower pocket.						
	d. Combination identification and instruction label (see 3.3.3). Locate as specified in 4.c.						
5.	Make left front fly.						
	a. Fold left front fly in half lengthwise and seam top and bottom edges.	301 or 401	SSe-2(a)	10-14	50 50	50 70	
	b. Turn, work out corners, and stitch top and bottom edges 3/16 to 1/4 inch from edge. Continue stitching along front folded edge maintaining gage of stitching.	301	SSe-2(b) and OSf-1	10-14	50	50	
	or						
	Fold left front fly in half lengthwise; turn in raw edges at ends of fly; and stitch top, front, and bottom edges, 1/8 to 3/16 inch from turned edges.	301	SSc-1 and OSf-1	10-14	50	50	
	c. Make four buttonholes in left front fly as indicated by marks on pattern, with the inside edges of eyelets 5/8 to 3/4 inch from front edge.	Button-hole		52-56 per button-hole	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make facings.						
	Finished appearance. The fronts shall be even in length with the facings neither tight, short, twisted nor too full. The lapel steps shall be even in length. Front edge of left front fly shall not be exposed on outside of coat.						
	a. Seam top edge of each lapel, slash seam allowance at collar notch, turn, work out corners, and single stitch beginning at collar notch to 3/16 to 1/4 inch from edge; continue across step and down front edge to the bottom of coat 3/16 to 1/4 inch from front edge.	301 and 301	SSe-2 OSf-1	10-14 10-14	50 50	50 50	
	b. Turn under back edge of right facing for coat and single stitch through front, 1/16 to 1/8 inch from turned edge.	301	EFb-1	10-14	50	50	
	or						
	Overedge stitch back edge of right facing for coat and stitch through front 1/8 to 1/4 inch from edge.	503 or 504 and 301	EFd-1 and EFa-1	6-10 10-14	70 50	70 50	
7.	Stitch front fly.						
	a. Mark the position and make buttonhole in left lapel, parallel with the top edge, with the inside edge of eyelets 5/8 to 3/4 inch from front edge of coat.	Buttonhole		52-56 per buttonhole	50	50	
	b. Superimpose left front fly on left facing as indicated on pattern, with back edges of left fly and facing even.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Stitch front fly. (cont'd)						
	c. Turn under back edge of left facing and fly together. Stitch through front, the entire length of the facing 1/16 to 1/8 inch from turned edge.	301	EFb-1	10-14	50	50	
	or						
	Overedge stitch fly and facing together. The overedge stitching shall extend the entire length of the facing. Single stitch left facing through front 1/8 to 1/4 inch from back edging of facing.	503 or 504 and 301	SSa-1 and EFa-1	6-10 10-14	70 50	70 50	
	d. Tack or bartack left front fly to front of coat with three vertical tacks positioned at top and bottom edge of fly with the third tack centered between the two middle button- holes. The tacks or bartacks shall be superimposed on or adjacent to the edge stitching of front of coat.	301 or bartack	SSa-1	10-14 28 per bartack	50 50	50 50	
8.	Make pocket flaps.						
	a. Fold flap with raw edges even (fabric face to face) and stitch side raw edges.	301	SSe-2(a)	10-14	50	50	
	b. Turn flap right side out, force out corners and edges, and edge stitch bottom and side edges 3/16 to 1/4 inch from edge.	301	SSe-2(b)	10-14	50	50	
	c. Make vertical buttonhole in each flap as indicated on pattern, with the inside edge of eyelet end of the buttonhole 3/8 to 1/2 inch from bottom folded edge.	Button-hole		52-56 per button-hole	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make sleeve tabs and side tabs.						
	a. Join plies of sleeve tabs face to face along both sides and pointed end, leaving back of tab open. Turn tabs, work out point, and stitch 3/16 to 1/4 inch from sides and points. Tab shall finish 2-1/4 inches ± 1/8 inch wide.	301 or 401 and 301	SSe-2(a) SSe-2(b)	10-14 10-14	50 50 50	50 70 50	
	b. Make a horizontal buttonhole in center (1/8 inch off center tolerance) of each sleeve tab with the inside edge of eyelet end 1/2 to 5/8 inch from pointed end of tab.	Button-hole		52-56 per button-hole	50	50	
	c. Join plies of side tabs, face to face along pointed ends and sides, but leave an opening in the center of one side in order to turn tab. Turn tabs and edge stitch all around with a 1/16 to 1/8 inch gage stitch, closing the open part of tab (which represents the bottom of finished tab). Tabs shall finish 1-3/4 inches ± 1/8 inch.	301 or 401 and 301	SSe-2(a) SSe-2(b)	10-14 10-14	50 50 50	50 70 50	
	d. Make a horizontal buttonhole in each end (1/8 inch off center tolerance) of side tab with the inside edge of eyelet end 1/2 to 5/8 inch from pointed end of tab.	Button-hole		52-56 per button-hole	50	50	
10.	Make collar.						
	a. Seam plies of collar around outside edges; trim corners, turn, work out points and edges, and single stitch 3/16 to 1/4 inch from edge. or	301 or 401 and 301	SSe-2(a) SSe-2(b)	10-14 10-14	50 50 50	50 70 50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make collar. (cont'd)						
	When collar is cut in one piece, fold collar in half lengthwise and stitch side edges; trim corners, turn, work out points and edges, and stitch 3/16 to 1/4 inch from side and top edges.	301 or 401 and 301	SSe-2(a)	10-14	50 50	50 70	
			SSe-2(b) and OSf-1	10-14	50	50	
11.	Make pockets.						
	a. Hem top of pocket, as indicated on pattern, and stitch 1/16 to 1/8 inch from edge.	301	EFb-1	10-14	50	50	
	b. Raw edges of pockets may be prehemmed prior to attachment to coat. The side and bottom edge may be turned under 3/8 inch and stitched 1/16 to 1/8 inch from edge.	301	EFb-1	8-10	50	50	
12.	Sew on pockets and flaps.						
	a. Turn in raw edges of pockets 3/8 inch, if not prehemmed (see 11.b.), position as indicated by pattern, and stitch sides and bottom of pockets to fronts 1/16 to 1/8 inch from turned-in edge. Stitching shall be superimposed on or adjacent to prehemming stitching when this option is selected.	301	LSd-1	10-14	50	50	
	b. Turn in top edge of flaps, position folded edge above pockets on lines indicated on pattern, and stitch with two rows of stitching 3/16 to 1/4 inch apart. The edges shall be buried in the stitching.	301	LSd-2	10-14	50	50	
	or						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Sew on pockets and flaps. (cont'd)						
	Position flaps above pockets so that the line of stitching will be aligned with the lines indicated on pattern. Stitch to fronts 3/16 to 1/4 inch from raw edges. Turn flaps down and raise stitch 3/16 to 1/4 inch from turned edge making sure to bury edges within seam.	301 or 401 301	LSb1-3(a) LSb1-3(a) LSb1-3(b)	10-14 10-14 10-14	50 50 50	50 70 50	
	c. Bartack pockets with vertical bartacks in line with pocket stitching.	Bartack		21-28 per bartack	50	50	
13.	Stitch side pleats.						
	a. Form inverted pleat in fronts and back by folding according to mark on pattern.						
	b. Stitch 1/16 to 1/8 inch from edge of inner and outer folds with stitching extending from below armhole to hem as indicated by pattern.	301	OSf-1	10-14	50	50	
14.	Join shoulder seams.						
	a. Join fronts to back at shoulder with the back over fronts, with a double-lapped and double-stitched seam.	301 or 401	LSc-2	10-14	50 50	50 70	
15.	Make sleeves.						
	a. Join the back arm seam of sleeves with a double-stitched seam with top sleeve lapped on under-sleeve.	301 or 401	LSc-2	10-14	50 50	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Set sleeves.						
	a. Set sleeves to coat with double-lapped and double-stitched seams, with fronts and back lapping the sleeves.	301 or 401	LSc-2	10-14	50 50	50 70	
17.	Join side and sleeve seams.						
	a. Sleeves may be hemmed prior to closing side and underarm seams according to operation 20.						
	b. Join side seams and underarm seams in one continuous operation with double-lapped and double-stitched seams with fronts lapping backs. When sleeves are prehemmed, finished bottoms of under-sleeve and top sleeve shall not be out of alignment by more than 1/8 inch.	301 or 401	LSc-2	10-14	50 50	50 70	
	c. Prehemmed sleeves shall be bartacked 1/4 inch from bottom of finished sleeve with a horizontal bartack positioned across sleeve joining seam.	Bartack		21-28 per bartack	50	50	
18.	Hem sleeves and attach button tabs.						
	a. Turn up bottom of sleeves, as indicated on pattern with the raw edge turned in, and stitch 1/16 to 1/8 inch from edge. Hem shall finish 2-1/4 inches ± 1/8 inch.	301	EFb-1	10-14	50	50	
	b. Position raw edge of sleeve tab on top sleeve as indicated on pattern with bottom edges even, and stitch the width of the tab 1/8 to 3/16 inch from raw edge of tab. Turn tab to finished position (toward back arm seam), and raise stitch tab 3/16 to 1/4 inch from turned edge. Raw edges shall be buried within the seam.	301	LSb1-2	10-14	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Set collar.						
	a. Seam undercollar to neck of coat with the seaming at ends of the collar not more than 1/8 inch below top edge of lapel. When size label is caught in seam, it shall be caught securely.	301	SSa-1	10-14	50	50	
	b. Turn in bottom edge of top collar and single stitch to neck of coat 1/16 to 1/8 inch from edge, with the stitching not more than 1/8 inch from undercollar joining seam.	301	LSb-1	10-14	50	50	
20.	Hem bottom.						
	a. Turn up bottom with the raw edge turned in and single stitch 1/16 to 1/8 inch from folded edge. Hem shall finish 5/8 ± 1/8 inch wide, and the ends shall not extend beyond front edges of coat.	301	EFb-1	10-14	50	50	
	or						
	In lieu of stitching across ends of hem, vertical bartacks may be substituted in line with front edge stitching.	Bartack		21-28 per bartack	50	50	
21.	Attach buttons.						
	a. Attach buttons to coat as follows:						
	(1) Position five buttons on right front 1 ± 1/8 inch from finished front edge (measurement taken from center of buttons) and correspond to the eyelet ends of buttonholes in front fly.	101 or 301		14-16 per button	30		
				14-16 per button	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Attach buttons. (cont'd) (2) One button on each pocket shall correspond with the eyelet end of flap buttonhole. (3) Two buttons shall be on each cuff. The first button shall conform to the tab buttonhole with sleeve in finished position. The second button on under-sleeve with the center of button 4 inches ± 1/8 inch from first button and 1-1/8 inches ± 1/8 inch from bottom edge of sleeve. The buttons shall be sewn through the hem. (4) Two buttons for each side pleat tab shall correspond with marks on pattern. Buttons shall be aligned with eyelet ends of tab buttonholes when the pleat is in finished position.						
22.	Clean coat. a. Trim all ends of thread and remove loose threads. b. Remove all spots and stains and all visible shade or size markings.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE IV. Finished measurements (in inches)

Size	6	8	10	12	14	16	18	20	22
1/2 Bust 1/	19-1/2	20	20-1/2	21-1/4	22	22-3/4	23-3/4	24-3/4	25-3/4
1/2 Sweep 2/	24-1/4	24-3/4	25-1/4	26	26-3/4	27-1/2	28-1/2	29-1/2	30-1/2
Cross back 3/	15	15-3/8	15-3/4	16-1/8	16-1/2	16-7/8	17-1/4	17-5/8	18
Back length: 4/									
Short	27-1/4	27-1/2	27-3/4	28	28-1/4	28-1/2	28-3/4	29	29-1/4
Regular	28-3/4	29	29-1/4	29-1/2	29-3/4	30	30-1/4	30-1/2	30-3/4
Long	30-1/4	30-1/2	30-3/4	31	31-1/4	31-1/2	31-3/4	32	32-1/4
Collar 5/	15-1/8	15-1/2	15-7/8	16-1/4	16-5/8	17	17-3/8	17-3/4	18-1/8
Sleeve length: 6/									
Short	22	22-1/4	22-1/2	22-3/4	23	23-1/4	23-1/2	23-3/4	24
Regular	23	23-1/4	23-1/2	23-3/4	24	24-1/4	24-1/2	24-3/4	25
Long	24	24-1/4	24-1/2	24-3/4	25	25-1/4	25-1/2	25-3/4	26

1/ Taken from folded edge to folded edge at base of armhole.

2/ Taken from folded edge to folded edge along bottom of coat with side pleats closed.

3/ Taken across back from back seams of sleeves.

4/ Taken from base of undercollar to bottom of coat.

5/ Taken along collar joining seam.

6/ Taken from top sleeve at shoulder seam to bottom of sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

* 3.10 Workmanship. The finished coat shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2.1 and 4.4.2.2.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 Point count inspection (see 6.5).

4.4.2.1 End item visual examination. The end items shall be examined for the defects listed in table V, and the assessment of penalty points shall be as indicated therein. Sampling and acceptance criteria shall be as specified in 4.4.2.1.1.

TABLE V. End item visual defects

Defect	Point value
Material defects and damage	
Any hole, cut, tear, smash, burn, drill hole 1/, scorched area, multiple float, or open place:	
- On outside 2/ (longest dimension in any direction):	
-Up to 1/4 inch inclusive	2
-More than 1/4 inch	3
- On inside 3/ (longest dimension in any direction):	
-Up to 1/4 inch inclusive	1
-More than 1/4 inch	2
Misweave, area of poor dye penetration, dyestreak, broken or missing yarn, visible mend, thin place, or shade bar	1
Loose yarn or coarse yarn on outside	1
Needle chew on outside (largest dimension in any direction):	
- Up to 1/2 inch inclusive	2
- More than 1/2 inch	3
Shaded part	
Variation in shade within an outside part	1
Any part required to be cut from one piece of material, shaded	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Defect	Point value
Cleanness	
Spot or stain on outside 1/4 inch or more (largest dimension in any direction)	1
Thread ends not trimmed to 1/2 inch or less throughout	1
Two or more shade or size tickets or loose threads not removed	1
Any size of shade marking on outside 1/4 inch or more	1
Component and assembly	
Any component part or required operation omitted (unless otherwise classified herein)	3
Any component not as specified	3
Any component part twisted, distorted, pleated, misshaped, tight, or full (unless otherwise classified herein)	2
Any operation not as specified (unless otherwise classified herein)	1
The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)	1
Cutting	
Any component part not cut in accordance with specified pattern or directional lines on patterns, or not in accordance with requirements	3
Seams and stitching	
Accuracy of seaming:	
- Seam irregular, twisted, pleated, or wavy	1
- Seam puckered (score only when on major portion of seam) 4/	1
- Any part of coat caught in an unrelated operation or stitching	2
- End of stitching when not caught in other seams or stitching, backtacked less than 1/4 inch	1
- Thread break (all stitch types) stitched less than 1/2 inch beyond each end of break	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Defect	Point value
Seams and stitching (cont'd)	
- Ends of a continuous line of stitching overlapped less than 1/2 inch (except label stitching)	1
- End of stitching on label overlapped with less than three stitches	1
Gage of stitching and seam allowance:	
- Irregular, i.e., unevenly gaged, or corresponding stitchings not uniformly gaged (to be scored only when condition exits along major portions of seam)	1
- Width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified	1
- Edge or raised stitching sewn too close to edge resulting in damage to cloth	2
- Seam allowance not as specified or varies more than 1/8 inch (score only when on major portion of seam)	2
Open seam (all seams):	
- Up to 1/2 inch inclusive	1
- More than 1/2 inch to 3/4 inch inclusive	2
- More than 3/4 inch	3
NOTE: One or more broken stitches or two or more continuous skipped or run-off stitches on joining seam constitute an open seam. On double stitched seams, a seam is considered open when one or both sides of seam is open.	
Raw edges:	
- On outside:	
- 1/8 to 1/4 inch inclusive	1
- More than 1/4 to 3/4 inch inclusive	2
- More than 3/4 inch	3
- On inside (except overedged edge):	
- More than 1/4 inch	1
- On overedged edge:	
- 1 inch to 2 inches inclusive	1
- More than 2 inches to 3 inches inclusive	2
- More than 3 inches	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Defect	Point value
Seams and stitching (cont'd)	
- Exposed under pocket flaps and sleeve tabs:	
- 1/4 to 1 inch inclusive	1
- More than 1 inch	2
Run-offs:	
- Edge or raised stitching:	
- 1/4 to 1/2 inch inclusive	1
- More than 1/2 inch	2
Seam and stitch type:	
- Not specified seam or stitch type	2
- Looper thread on outside (when 401 stitch type is used)	3
- Any line of stitching omitted	3
Stitch tension:	
- Loose tension, resulting in a loose seam:	
- Up to 1/2 inch inclusive	1
- More than 1/2 inch up to 3/4 inch inclusive	2
- More than 3/4 inch	3
- Loose tension on raised or edge stitching resulting in exposed loose thread	1
- Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	3
Stitches skipped or broken:	
- 1/4 to 1/2 inch inclusive	1
- More than 1/2 inch	2
Stitches per inch (to be scored only when condition exists on major portion of seam):	
- All seams, excepting stitching of labels and overedge stitching:	
- Less than the minimum	2
- More than the maximum	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Defect	Point value
Seams and stitching (cont'd)	
- Stitching of label and overedge stitching, two or more stitches less than specified	1
Buttonholes	
One or more omitted, added, not specified type, or not finished as specified	3
Gimp omitted, uncut buttonhole, or ends of gimp not pulled through to underside	1
Ragged edge, incomplete stitching, stitching not securely caught in fabric	2
One or more broken stitches or two or more skipped stitches in one or more buttonholes	1
Buttonhole stitching extending beyond bartack; stitches per buttonhole less than minimum specified	1
Finished cut length not as specified	1
End of buttonhole tacked with less than four stitches per bar (see 3.7.3):	
- One buttonhole	1
- Two or more buttonholes	2
Buttons (one or more):	
Missing, broken, defective, misplaced, not positioned or attached as specified, or insecurely sewn	1
Stitching not locked at end of cycle (tug at loose end of thread when accessible, to determine if it will ravel)	1
Sleeve buttons not sewn through sleeve hem	1
Bartacks or tacks (one or more):	
Missing, insecure, misplaced, not specified size or type, or not serving intended purpose	2
Collar	
Top collar tight, causing collar to curl	2
Fullness or puckers on top collar	2
Tight at joining to neck, causing puckers or pleats on front or back	2

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the currentversion before use.

TABLE V. End item visual defects (cont'd)

Defect	Point value
Collar (cont'd)	
Corner of pointed end poorly shaped or not of uniform size or shape	2
Edge uneven	1
Twisted	2
Points uneven in length:	
- 1/4 inch to 1/2 inch	1
- More than 1/2 inch	2
Off center by 1/2 inch or more	1
Ends of undercollar joining seam overlapping top of lapel by more than 1/8 inch	1
Fronts	
* Length of fronts:	
- Uneven by 3/8 inch or more at bottom, when buttoned	2
- Uneven by 3/8 inch or more at neck, when buttoned	2
Front buttons and left fly out of alignment, causing a noticeable bulge or twist on fronts when buttoned	2
Lapel and left fly (position):	
- Buttonholes less than 5/8 inch or more than 3/4 inch from edge	2
- Left fly 1/2 inch or more from equal spacing	2
- Left fly constructed with the purling on the reverse side (facing wearer) of left fly	2
- Lapel buttonhole not parallel with top edge of lapel	1
- Lapel buttonhole constructed with the purling on the inside of facing	1
Front buttons (position measured to center of buttons):	
- Button less than 7/8 inch or more than 1-1/8 inches from edge	2
- Buttons 1/4 inch or more out of vertical alignment	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Defect	Point value
Pocket and flaps	
Construction and position:	
- Edges of pocket pleated or twisted in stitching	1
- Raw edge of pocket hems not turned in	2
- Pocket flap tight, causing fullness, twisting or curling of pocket flap	2
- Pockets or flaps set on crookedly, or poorly shaped	2
- Pockets or flaps out of alignment by more than 1/2 inch	2
- Pockets not parallel with front edge by 3/8 inch or more	2
- Flap not covering front or back edge of pocket by 3/16 inch or more	2
Button and buttonhole:	
- Button not corresponding with eyelet end of buttonhole, causing pocket to be pulled up, or flap to bulge or twist when buttoned	2
- Buttonhole not vertically positioned on flap	3
- Constructed with purling on the underside of flap	2
Sleeves	
Sleeves reversed (i.e., right sleeve in left armhole, left sleeve in right armhole)	3
Sleeve puckered or pleated at joining to armhole	2
Sleeve tight at armhole, causing puckers, or pleats on fronts or back at armhole seam	2
Sleeve backarm seams unequal distance from shoulder seams by more than 3/4 inch	1
Sleeve hem less than 2-1/8 inches or more than 2-3/8 inches wide	1
Bottom edges of top and undersleeve not aligned at bottom by more than 1/8 inch if alternate hemming is used	2
Sleeve buttonhole tabs and buttons	
Inside edge of buttonhole less than 1/2 inch or more than 5/8 inch from pointed end of tab	1
Buttonhole off center from point of cuff by more than 1/8 inch	1

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the currentversion before use.

TABLE V. End item visual defects (cont'd)

Defect	Point value
Sleeve buttonhole tabs and buttons (cont'd)	
Bottom edge of tab extending below sleeve, or extending above bottom edge of sleeve by more than 1/8 inch	1
First button not aligned with eyelet end of buttonhole tab when turned to finished position	1
* Second button less than 3-7/8 inches or more than 4-1/8 inches from first button or less than 1-1/8 or more than 1-3/8 inches from bottom edge of sleeve (measurements taken from center of buttons)	1
Width of buttonhole tab less than 2-1/8 inches or more than 2-3/8 inches	1
Shoulder, armhole, underseam, side seams, and back and front arm sleeve seams	
Front lapped on back at shoulder seams	1
Undersleeve lapped on top sleeve at back arm or front arm seams	1
Sleeve lapped on front or back at armhole seam	2
Labels	
Size:	
- Missing, incorrect, or illegible	2
- Top edge of label less than 1/2 inch or more than 3/4 inch below collar joining seam (when not caught in collar stitching)	1
- Not positioned as specified	1
- Not stitched on four sides	1
- More than 1 inch off center	2
Identification:	
- Missing, incorrect, or illegible	2
- Label stitching not covered by lower left pocket	2
- Not stitched on four sides	1

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the currentversion before use.

TABLE V. End item visual defects (cont'd)

Defect	Point value
Labels (cont'd)	
Instruction or combination identification and instruction:	
- Missing, incorrect, or illegible	3
- Label stitching not covered by lower right pocket	2
- Not stitched on four sides	1
Front facings	
Twisted, causing twist on fronts	2
Tight or short, causing fullness on fronts	2
Front puckered or pleated by stitching on back edge of facing through front	1
Back edge of right facing not turned under or overedged	3
Back edge of left facing and fly not turned under or overedge stitched together	3
Lapel steps uneven by more than 1/4 inch	2
Left fly	
Construction and position:	
- Fly twisted or puckered	2
- Fly exposed beyond edge of left front	2
- Tacking of left fly not superimposed on edge stitching of left front	1
Bottom hem	
Stitching across ends of hem omitted or insecure	1
Twisted	2
Width less than 1/2 inch or more than 3/4 inch	2
Irregular in width by 1/4 inch or more	1
Bottom of coat pleated or puckered at stitching forming hem on outside of coat	2
One or both hem ends extending more than 1/8 inch beyond front edge of coat	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Defect	Point value
Side pleat	
Length uneven by 1/4 inch or more at bottom when side tab is buttoned	2
Side pleat off center by 1/2 inch or more at bottom	1
Side pleat buttonhole tabs and buttons	
Inside edge of eyelet less than 1/2 inch or more than 5/8 inch from end of tab	1
Buttonholes off center from point of tab by more than 1/8 inch	1
Buttons not aligned with eyelet end of tab buttonhole when pleat is in finished position	1
Width of tabs less than 1-5/8 inches or more than 1-7/8 inches	1
Position of tab not parallel to hem of coat	1

1/ Drill hole - This defect should not be scored when visible on the inside of the coat, provided that the component as attached to the outside of coat fully covers the drill hole.

2/ The "outside" is any part of the coat that is visible when the completely buttoned and closed coat is examined.

3/ The "inside" is any part of the coat that is not visible when the completely buttoned and closed coat is examined.

4/ Seams suspected of being puckered shall be examined at a distance of 3 feet in comparison with the AATCC photographic comparative rating for seams (AATCC Test Method 88B). Puckering on a major portion of the suspected seam that equals or is worse than rating 3 for single needle seams or double seams shall be scored as a puckered seam.

4.4.2.1.1 Sampling and acceptance for visual examination. The sampling and acceptance criteria shall be as specfied in table VI and 4.4.2.1.2 through 4.4.2.1.4.4. The lot size unit and the sample unit shall be one coat. The lot shall be unacceptable if:

a. The point value for 3 and 2 point defects exceeds the applicable maximum acceptable point value.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the currentversion before use.

or

b. The point value for total (3, 2, and 1 point) defects exceeds the applicable maximum acceptable point value.

TABLE VI. Sampling and acceptance criteria for visual examination

	Lot size	Sample size	Maximum acceptable point values: 3 and 2 point defects	Maximum acceptable point values: 3, 2, and 1 point defects
Normal inspection	Up thru 500	50	13 points	25 points
	501 thru 1200	80	19 points	31 points
	1201 thru 3200	125	27 points	43 points
	3201 thru 10,000	200	38 points	63 points
	10,001 and over	315	58 points	93 points

	Lot size	Sample size	Maximum acceptable point values: 3 and 2 point defects	Maximum acceptable point values: 3, 2, and 1 point defects
Tightened inspection	Up thru 500	50	7 points	16 points
	501 thru 1200	80	12 points	25 points
	1201 thru 3200	125	18 points	37 points
	3201 thru 10,000	200	28 points	57 points
	10,001 and over	315	41 points	85 points

	Lot size	Sample size	Maximum acceptable point values: 3 and 2 point defects 1/	Maximum acceptable point values: 3, 2, and 1 point defects
Reduced inspection	Up thru 1200	32	7-14 points	24 points
	1201 thru 3200	50	12-18 points	30 points
	3201 thru 10,000	80	16-21 points	38 points
	10,001 and over	125	23-28 points	43 points

1/ If the first value is exceeded but the second value has not been exceeded, accept the lot but reinstate normal inspection (see 4.4.2.1.4.4b). The second value is the maximum acceptable point value.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the currentversion before use.

4.4.2.1.2 Initiation of inspection. Normal inspection shall be used at the start of inspection unless otherwise directed by the responsible procurement quality assurance element administering the contract.

4.4.2.1.3 Continuation of inspection. Normal, tightened, or reduced inspection shall continue unchanged on successive lots, except where switching procedures in 4.4.2.1.4 require a change.

4.4.2.1.4 Switching procedures.

4.4.2.1.4.1 Normal to tightened. When normal inspection is in effect, tightened inspection shall be instituted when two out of five consecutive lots have been rejected on original inspection (i.e., ignoring resubmitted lots for this procedure).

4.4.2.1.4.2 Tightened to normal. When tightened inspection is in effect, normal inspection shall be instituted when five consecutive lots have been considered acceptable on original inspection.

4.4.2.1.4.3 Normal to reduced. When normal inspection is in effect, reduced inspection shall be instituted providing that all of the following conditions are satisfied:

a. The preceding 10 lots have been on normal inspection and none have been rejected on original inspection.

b. The total number of points for 3 and 2 point defects in the samples from the preceding 10 lots is equal to or less than 60 percent of the total maximum acceptable point values for 3 and 2 point defects from the preceding 10 lots.

c. The total number of points for 3, 2, and 1 point defects in the sample from the preceding 10 lots is equal to or less than 75 percent of the the total maximum acceptable point values for 3, 2, and 1 point defects from the preceding 10 lots.

d. Production is at a steady rate.

e. Reduced inspection is considered desirable by the procurement quality assurance element administering the contract.

4.4.2.1.4.4 Reduced to normal. When reduced inspection is in effect, normal inspection shall be instituted if any one of the following occur on original inspection:

a. A lot is rejected;

b. A lot is considered acceptable but exceeds the applicable first value (see 1/ to table VI);

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the currentversion before use.

c. Production becomes irregular or delayed; or

d. Other conditions warrant that normal inspection be instituted.

4.4.2.2 End item dimensional examination. The appropriate number of coats, as specified below, shall be examined for conformance to the finished measurement requirements specified in 3.9. When a measurement deviates from a dimension and tolerance specified, the coat will be penalized one point. Each coat shall also be penalized one point when the sleeves are uneven in length by 1/2 inch or more. The lot shall be unacceptable if the total point value resulting from this examination exceeds the maximum acceptable point value specified below. Each size of coat present in the lot shall be represented in the sample selected for this examination.

Lot size (coats)	Sample size (coats)	Maximum acceptable point value
Up thru 500	8	0
501 thru 3,200	13	1
3,201 thru 35,000	20	2
35,001 and over	32	3

4.4.3 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number per container is more or less than required

* 4.4.4 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A preservation. Each coat shall be laid flat with the front up. The sleeves shall be folded at right angles across the chest one on top of the other. For the larger sizes, it may be necessary to adjust the sides in order to attain the desired width of approximately 23 inches. The bottom edge of the coat shall first be folded over a few inches and the coat folded in half so the length measures approximately 14-1/2 inches. Five folded coats of one size only shall be neatly stacked in a bundle and securely tied with cotton tape or twine approximately 4 inches in from each end.

5.1.2 Commercial preservation. Coats shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. Thirty-five coats of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, five in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). When unit loads are strapped, strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Thirty-five coats of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW), class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level B unit packs shall be packed flat, five in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), shipping containers shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.3 Commercial packing. Coats, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), coats packed as specified in 5.2.2 or 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The coats are for wear by female military personnel of the Department of Defense as a maternity work uniform outer garment.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3, and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.5 Point count system. This document contains the requirements for a point count system for sampling and inspection of the end item. For the visual examination, point values of 1, 2, or 3 are assigned to the listed defects depending on severity. The higher point values are assigned to those defects having a detrimental effect on the appearance or serviceability of the items.

6.6 Subject term (key word) listing.

Clothing
Female
Woman
Woodland camouflage pattern

6.7 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Air Force - 11

Review activities:

Army - MD
Air Force - 82, 99
DLA - CT

User activity:

Air Force - 45

Preparing activity:

Army - GL

(Project 8410-0763)

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:58Z
Check the source to verify that this is the current version before use.

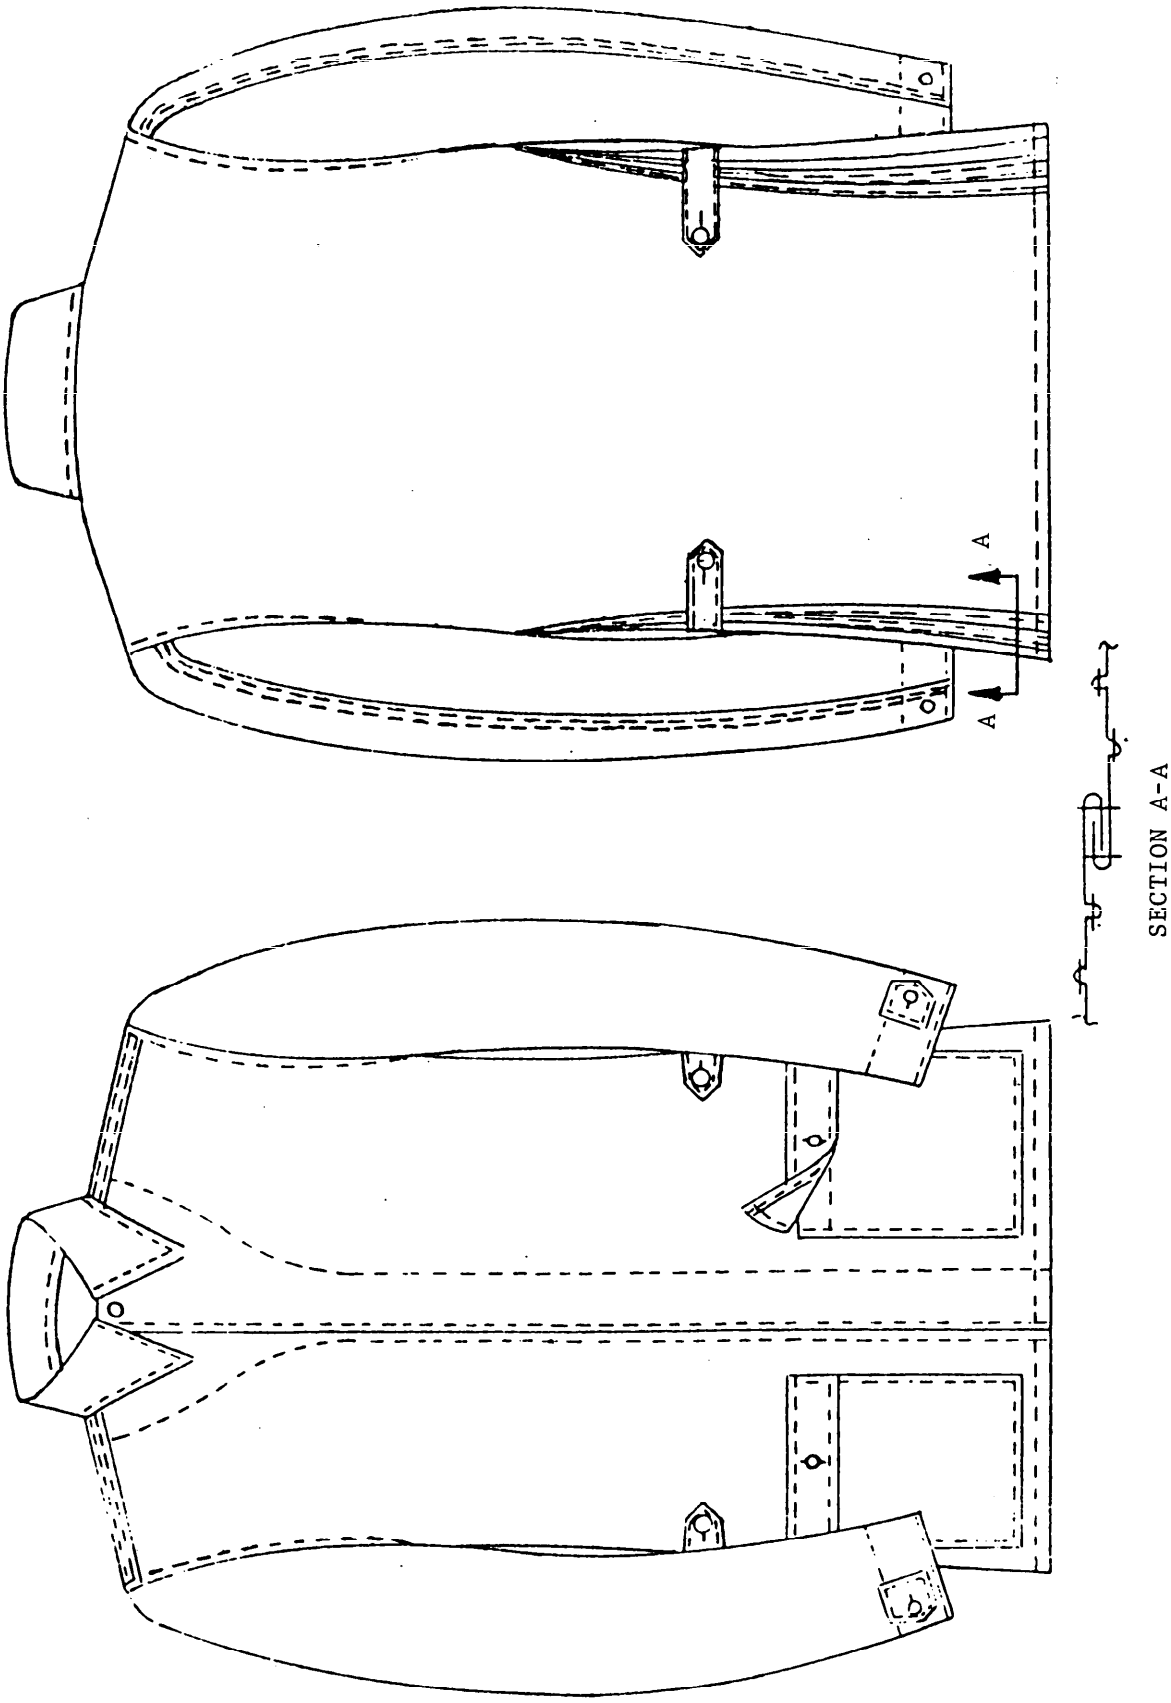


FIGURE 1. Coat, Maternity, Utility Work Uniform.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-44111B	1990 December 28

3. DOCUMENT TITLE
Coat, Maternity, Utility Work Uniform

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
U.S. Army Natick RD&E Center	508-651-4532	256- 4532
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: STRNC-IRT Natick, MA 01760-5019	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 20240-21T23:58Z
Check the source to verify that this is the current version before use.