INCH-POUND

MIL-N-44106B(GL)
3 May 1989
SUPERSEDING
MIL-N-44106A(GL)
19 November 1987

MILITARY SPECIFICATION

NECKTAB, WOMAN'S SHIRT

This specification is approved for use by the Natick Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers a black polyester/cotton durable press (poplin) necktab to be used with woman's long and short sleeve shirts.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8445

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

DDD-L-20	-	Label: for Clothing, Equipage and Textage, (General Purpose)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-F-21840	-	Fastener Tapes, Hook and Loop, Synthetic
MIL-T-43548	-	Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43594	-	Cloth, Interlining, Polyester
MIL-T-43624	-	Thread, Polyester, Spun
MIL-C-43843	-	Cloth, Plain Weave, Polyester/Cotton, Precured Durable Press

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

* (Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

* 2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 204 - Sewing Threads, Testing
D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Color Card of America
Department of Defense Standard Shades for Sewing Thread

(Color cards may be available from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

* (Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3), in accordance with 4.3.

3.2 Samples. Guide samples, when furnished, are solely for guidance and information (see 6.4). Variations from the document may appear in the sample, in which case the document shall govern.

* 3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material. The necktab material shall be polyester/cotton, precured durable press, plain weave (poplin) cloth conforming to MIL-C-43843. The color shall be Black 305.

* 3.3.2 Interlining. The material for interlining the necktabs shall be polyester interlining cloth conforming to MIL-C-43594, except the minimum weight per square yard shall be 2.5 ounces and the minimum yarns per inch shall be 70 warp and 50 filling. The maximum stiffness shall be 0.004 inch pounds in the warp direction and 0.002 inch pounds in the filling direction. The breaking strength requirements shall not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

* 3.3.3 Labels. Each necktab shall have a care instruction label, class 3 (with the exception of item description) conforming to type IV (stamping) of DDD-L-20, except the height of the numbers shall be 1/4 ± 1/16 inch high; stamping shall be in yellow or white ink. The name of the manufacturer and the DLA contract number shall also be stamped on the necktab. The fastness to laundering requirements of DDD-L-20 shall apply.

* 3.3.4 Care instruction label. The care instruction label for the necktab shall bear the following information:

Dry clean or
See shirt care label
(Hand wash separately)

3.3.5 Thread. The thread for seaming and stitching shall be cotton-covered polyester core, ticket No. 70, 2 ply and 80, 2 ply conforming to MIL-T-43548. Spun polyester thread, ticket Nos. 70, 2 and 90, 2 ply, conforming to class 1 or 2 of MIL-T-43624 may be substituted for the cotton-covered polyester core thread. The thread shall be stabilized so as not to shrink in boiling water more than 1.5 percent when tested as specified in 4.4.1.1.

3.3.5.1 Color and colorfastness. The thread for the necktab shall be Black AA, CA 66043. The dyed thread shall show fastness to light, perspiration, and laundering equal to or better than the standard sample or equal to or better than a rating of "good".

3.3.6 Fastener tape, hook, nylon. The nylon hook fastener tape shall be 5/8 inch wide, conforming to type I, class 1, of MIL-F-21840. The color for the necktab hook fastener tape shall be Black 3230.

* 3.4 Design. The necktab fastens (to loop fastener tape) underneath the collar of the woman's AG 415 long sleeve and short sleeve shirt.

3.5 Figure. Figure 1 is furnished solely for guidance and information. Should variation from the written specification appear in the figure, the written specification shall govern.

3.6 Patterns. Standard patterns will be furnished by the Government and, unless otherwise indicated, provide an allowance of 1/4 inch for all seams. The standard patterns shall not be altered in any way and are to be used only as a guide for cutting the contractor's working patterns, which shall be identical to the standard patterns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

3.6.1 Pattern parts. The component parts of the necktab shall be cut from material as specified in accordance with the pattern parts indicated.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Plain weave, precured, durable press, polyester cotton cloth (black)	Band	2
	Tab	2
Polyester fiber interlining cloth	Tab interlining	1

3.7 Construction. The construction shall conform in all respects to the requirements specified in table II and herein.

3.7.1 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. Where two or more seam or stitch types are given for the same part of an operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Trimming shall be as specified in operations and governed by tolerances cited. The edge and top stitching shall be uniformly gaged. Seams required to be worked out, that have a depth between the fold of 1/16 inch or more shall be considered a defect.

3.7.1.1 Type 301 stitching. Ends of stitching shall be backstitched or overstitched not less than 1/4 inch, 1 inch except where ends are caught in other seams or stitching or turned under in the hem. Ends of a continuous line of stitching shall be overlapped not less than ½ inch. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of material sewn (see 6.5). The lock shall be embedded in the material sewn. Tensions should be adjusted to avoid loose bobbin thread creating unsightly loops on outside (as worn) of band when attaching hook fastener tape; and tapes should be securely attached.

3.7.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-offs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of one inch back of the end of the stitching. 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of one inch back of the defective area, (½ inch on box stitching) and continue over the defective area minimum of one inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. When damaged thread has been removed, needle holes do not constitute damage to the material. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

* 3.7.1.2 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching (see 6.5). Both ends of seams or stitching produced with a 401 stitch type, when not turned under the hem or held down by other stitching, shall have a 3/4 to one inch chain extending beyond each end. The looper (underthread) shall be on the inside of the necktab (between plies). All repairs shall be made using a 301 stitch in accordance with 3.7.1.1.1a or 3.7.1.1.1b.

3.7.1.3 Type 101 stitching. Tension of 101 stitch tacking shall be adjusted and maintained so there will be no loose stitching resulting in either loose underneath or top thread, or excessively tight stitching puckering outward appearance of tabs. The underneath loop shall be on the undersurface/underneath the necktab, unless otherwise specified in the table of operations (see 6.5).

3.7.1.3.1 Repairs of type 101 stitching. Repairs shall be accomplished by superimposing new tack in same location after removing threads of first broken tack.

* 3.7.2 Use of automatic apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table II, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government finished shaper pattern is forwarded, the component shall conform to that pattern.

3.7.3 Thread ends. All thread ends that are visible on the finished item shall be trimmed to a length of not more than 1/4 inch.

3.7.4 Repairs. Repairs such as mends, darns, patches, or splices are not permitted on the necktab.

3.8 Replacement of defective components. During the spreading, cutting and manufacturing process, components of the necktab having material defects or damages that are classified as defects in 4.4.2 and 4.4.3 shall be removed from production and replaced with non-defective and properly matched components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

3.9 Manufacturing operations requirements. The necktab shall be made by and with the use of all operations shown in table II. Unless otherwise specified in table II, the contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible, providing the thread is removed or does not show on the necktab.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

TABLE II.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting.						
	a. Cut the basic material for the band and tab and the interlinings in strict accordance with patterns furnished which show directional lines, for proper assembly. Directional lines shall be placed in the warp direction.						
	b. Cut component parts from the same piece of the basic material.						
*	c. Cut hook fastener tape in 1-3/4 ± 1/16 inch lengths.						
2.	Marking.						
	a. Mark or bundle all component parts to insure a uniform shade throughout the necktab and band.						
	b. Any method of marking may be used except: (1) Metal fastening devices. (2) Sew-on tickets. (3) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets.						
*3.	Replacement of defective components.						
	During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2 and 4.4.3 shall be removed from production and replaced with nondefective and properly matched components.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make band and stamp label.						
	Finished appearance. The band shall finish smooth, flat and uniform in construction.						
	a. Position the band plies face to face and stitch 1/4 ± 1/16 inch around all edges except between notches	301 or 401	SSa-1 SSa-1	10-14 10-14	70 70	70 80	
	b. Clip corners and trim edges 1/8 to 3/16 inch from stitching.						
	c. Turn band, work out points and edges with seam allowance between notches turned in, topstitch opening 1/16 to 3/32 inch from edge.	301	SSe-2(b)	10-14	70	70	
	d. Press band with a heated pressing iron or machine without any seam impressions or gloss. A hot head pressing machine may be used. The machine shall be equipped with controls for accurate temperature (250 to 270°F), time (minimum 10 seconds) and pressure (70 to 80 psi gauge) (see 6.6).						
*	e. Position a 1-3/4 by 5/8 inch strip of black hook fastener tape (underneath ply as worn or label side) on each end of band, so that the tape does not extend beyond edges of band. The end of tape shall be positioned as close to the end of band as possible (see figure 1). Stitch on all edges.	301	LSbj-1	10-14	70	70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make tab and stamp care label, name of manufacturer and DLA number.						
	Finished appearance. The tab shall finish smooth, flat and uniform in construction.						
	a. The care label, name of manufacturer and the DLA contract number shall be centered on the tab widthwise on the inside ply of the tab on the left side (as worn) 3/4 ± 1/16 inch from the pointed end.						
	b. Position the tab plies face to face with interlining on top and stitch 1/4 ± 1/16 inch around all edges except between the notches.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	70 70	70 80	
	c. Clip corners and trim edges 1/8 to 3/16 inch from stitching.						
	d. Turn tab, work out points and edges, and with seam allowance between notches turned in, topstitch notch opening 1/16 to 3/32 inch from edge.	301	SSe-2(b)	10-14	70	70	
	e. Press tab with heated pressing iron, machine or hot head press as specified in operation 4.d.						
6.	Attach tab to band.						
	Finished appearance. The finished tab shall be centered on the band with the tab ends intersecting and even in length at the bottom of the band. The necktab shall finish smooth and flat. The tab ends shall not be uneven in length by more than 1/16 inch and the distance between the points shall not be less than 1-3/8 or more than 1-5/8 inches.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Attach tab to band. (cont'd)						
	a. With fastener tape of band facing down, place tab on left side of band as indicated by marks on pattern and securely tack (1/4 ± 1/16 inch) left tab back edge to the bottom edge of band.	301	SSbe-2(b)	10-14	70	70	
	b. Fold tab over and under band and securely tack (1/4 ± 1/16 inch) right tab back edge to bottom edge of band.	301	SSbe-2(b)	10-14	70	70	
*	c. Tack through all plies except the outside ply with a 1/8 to 1/4 inch center tack. Tack should be located where the tab ends cross at the bottom edge of the band. Majority of topstitching of tab shall be covered by band.	101 or Hand		6-8 2-4	70		
7.	Clean and press.						
	Press necktab with a heated pressing iron or machine without any seam impressions or gloss. Trim thread ends, remove loose threads, spots or stains and shade tickets. Thread ends shall not be trimmed by singeing. A hot head press may be used according to requirements specified in operation 4.d.						

Source: https://secret.dla.mil - Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

3.10 Finished measurements. The finished measurements of the necktabs shall conform to the requirements in table III.

* TABLE III. Finished measurements (inches)

		Tolerance
Band 1/	6-3/4	± 1/8
1/2 tab 2/	3	± 1/8

1/ The band measurements shall be taken straight across band from lower outside corner to lower outside corner.

2/ The tab measurement shall be taken from the fold line at the top, down to the bottom points, along the edges nearest the center.

3.11 Workmanship. The finished necktab shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Thread heat stability testing. In addition to the testing provisions contained in subsidiary specifications, the thread shall be tested for shrinkage in boiling water as specified in ASTM D 204 for conformance to the requirement in 3.3.5. The lot size shall be expressed in units of cones. The sample unit shall be one cone. The sample size shall be as follows:

Lot size (cones)	Sample size (sample units)
Less than 800	5
801 to 22,000	8
22,001 and over	13

Any test failure shall be cause for rejection of the lot.

4.4.2 End item visual examination. The end items shall be examined for the defects listed in table IV. The lot size shall be expressed in units of necktabs. The sample unit shall be one necktab. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.5 for major defects, 6.5 for major and minor A combined defects, and 15 for total (major, minor A, and minor B combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Pressing	Omitted, poorly pressed, not pressed as specified, or exhibiting a double crease line		201	
	Burned or scorched	101		
	Gloss, wrinkles, or creases			301
	Edge bulky (not pressed solidly)			302
	Tab exhibiting a double crease line when it crosses over the band at center front	102		
Material defects and damages	Hole, cut, tear, needle chew, burn, mend, darn, patch, multiple float, or shade bar on outside of:			
	- tabs		202	
	- band			303
NOTE:	The term "outside" refers to the part of the necktab that faces away from the wearer.			
Shaded parts	Variation in shade within an outside part or between outside parts	103		
	Outside part shaded on:			
	- tabs	104		
	- band		203	
Cleanness	Any spot or stain on outside of:			
	- tabs	105		
	- band		204	
	One or more marking tickets not removed		205	
	Any marking clearly visible on outside	106		
	Thread ends not trimmed to 1/4 inch or less, or loose threads not removed			304
	Visible basting thread not removed			305
Components and assembly	Any component part or required operation omitted or added (unless otherwise classified herein)	107		
	Any operation not performed as specified (unless otherwise classified herein)			306

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Cutting	Any component part not cut in conformance with directional lines indicated on patterns or not cut in accordance with document requirements	108		
Seams and stitching	Accuracy of seaming and stitching:			
	1. Seam irregular or twisted, puckered, pleated or wavy	109		
	2. Part of material caught in unrelated operation or stitching:			
	- caught in up to, and including, 1/4 inch of stitching		206	
	- caught in more than 1/4 inch of stitching	110		
	3. End of stitching when not caught in other seams or stitching backtacked less than 1 inch			307
	4. Stitching overlapping end of thread break less than 1/2 inch			308
	5. Ends of a continuous line of stitching overlapped less than 1/2 inch on all continuous stitching			309
	Gage of top stitching and seam allowances:			
	1. Irregular, i.e., unevenly gaged		207	
	2. Not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified			310
	Open seam on all seams:			
	1. Up to and including 1/2 inch			311
	2. More than 1/2 inch up to and including 3/4 inch		208	
	3. More than 3/4 inch	111		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Runoff:			
	1. On joining seam, score as open seam			
	2. Edge or raised stitching (when not resulting in an open seam):			
	- up to and including 1/2 inch			312
	- more than 1/2 inch		209	
	Seam and stitch type:			
	1. Not specified seam or stitch type		210	
	2. Looper thread of 401 stitch type on outside	112		
	3. Any required line of stitching omitted	113		
	4. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			313
	5. Any seam not lapped or finished as specified		211	
	Broken, missing, or skipped stitches on edge, top, or edge stitching (when seam is seamed, turned, and stitched after stitching):			
	1. 1/4 to 1/2 inch (inclusive)			314
	2. More than 1/2 inch		212	
	Stitch tension:			
	1. Loose tension resulting in loose seam	114		
	2. Loose tension on edge stitching resulting in exposed loose thread			315
	3. Tight tension (stitches break when strain is applied in direction of seam or stitching)	115		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Stitches per inch (to be scored only when the condition exists on more than half the length of seam or stitching):			
	1. Less than the minimum		213	
	2. More than the maximum			316
Tack	Missing	116		
	Insecure, misplaced, not specified size or type, or not serving intended purpose	117		
	Loose stitch tension		214	
Labels	Omitted, incorrect, or illegible		215	
	Not positioned as specified			317
	Edge of label less than 11/16 inch or more than 13/16 inch from pointed end of tab			318
Band and tab	Not smooth, flat, and uniform	118		
	Exposed raw edge on outside:			
	1. Up to and including 3/8 inch			319
	2. More than 3/8 inch		216	
	Points not worked out	119		
	Edges not worked out		217	
	Fastener hook tape less than 1-11/16 or more than 1-13/16 inches long		218	
	Fastener hook tape not specified width		219	
	Fastener hook tape not in specified location		220	
	Fastener hook tape not specified color			320
	Tab not centered on band as specified	120		
	Tab not attached to band as specified		221	
	Tab missing	121		
	The tab ends uneven in length by more than 1/8 inch	122		
	The distance between the tab points less than 1-3/8 or more than 1-5/8 inches	123		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

4.4.3 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified in table III. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of nacktabs. The sample unit shall be one necktab. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping or inadequate stapling. Bulged or distorted container.
Content	Number of necktabs per shipping container is more or less than specified. Number of necktabs per intermediate container is more or less than specified. 1/

1/ For this defect one intermediate container shall be examined.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1, and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. One-hundred and twenty necktabs shall be packed in an intermediate two-piece, full telescope style set up or folding paperboard box. Inside dimensions of each size paperboard box required shall be determined by the contractor. Any void occurring within the box shall be filled with crumpled tissue paper.

5.1.2 Commercial. Necktabs shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level B or Commercial, as specified (see 6.2).

5.2.1 Level B packing. Nine hundred and sixty necktabs, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW), class domestic, grade 200 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.4.4.

5.2.1.1 Weather-resistant fiberboard container. When specified (see 6.2), the fiberboard shipping container shall be grade V3c, V3s, or V4s fiberboard box fabricated in accordance with the appendix of PPP-B-636, except that inspection shall be in accordance with 4.4.4.

5.2.2 Commercial packing. Necktabs, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

5.3 Palletization. When specified (see 6.2) necktabs, packed as specified in 5.2.1 and 5.2.2 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, intermediate packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The necktab is intended for wear with AG-415 short and long sleeve shirts by female military personnel of the Department of the Army and Junior ROTC.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When a first article sample is required (see 3.1, 4.3, and 6.3).
d. Levels of preservation and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.1.1).
f. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in all acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

6.5 Seam appearance. In order to avoid puckering and to produce the flattest seams possible, consideration must be given to the following:

a. The needles used for all seams should be as fine as possible, consistent with the size or diameter of the thread used.

b. The throat plate hole should be no larger than necessary to permit free entry of the needle and to prevent flagging.

c. The finest feed (approximately 18 teeth) possible should be used with a pressure foot to exactly match the shape and size of the feed. The face of the pressure foot (underside next to the feed on the machine) should be highly polished to eliminate roughness and reduce drag. Diamond shaped feed teeth have been used quite successfully.

d. The lightest pressure should be used to prevent stretching of the top ply of material.

e. In stitch type 301 sewing, the bobbin tension should be adjusted so that when a full bobbin is placed in the bobbin case and threaded through the tension spring, the bobbin and case shall ride slowly down the thread when the free end of the thread is held in the vertical position. Needle tension should be adjusted after the bobbin tension to provide slightly more needle thread than bobbin thread in the stitch.

f. When sewing with stitch type 401 (including the seaming row of the safety stitches), the thread ratio (needle and looper) should be adjusted to produce a stitch with 60 to 70 percent needle thread, and both needle and looper thread tension should be held to the minimum.

g. Thread takeup mechanism should be set on all machines to relieve as much tension as possible when forming the stitch. All thread contacts should be well polished and free of burrs, cuts, and rough spots.

6.6 Pressing apparatus. It is recommended that the following option be used when this option is selected:

"Formatic" hot head pressing machine or equal. "Formatic" manufactured by the American Laundry Machine Co., Cincinnati, OH 45200.

6.7 Subject term (key word) listing.

Clothing
Uniform, womens

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

6.8 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, irrespective of the marginal notations and relationship to the previous issue.

Custodian:

Army - GL

Review activities:


Army - MD
DLA - CT

Preparing activity:


Army - GL

(Project 8445-A106)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

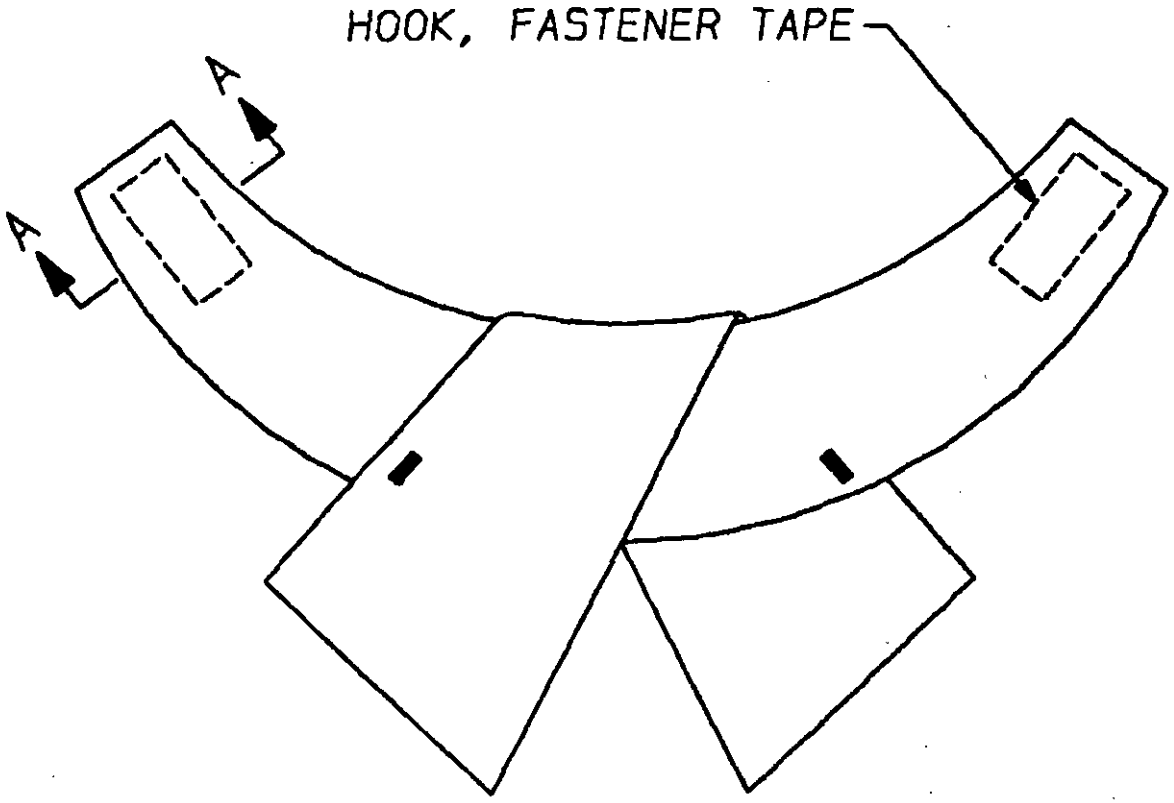

SHORT AND LONG SLEEVE SHIRT NECKTAB



SECTION A-A

FIG. 1 - NECKTAB, WOMAN'S SHIRT

*U.S. GOVERNMENT PRINTING OFFICE 1979 - 604-033/12966

2-1-1578

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-N-44106B(GL)	Necktab, Woman's Shirt

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:56Z
Check the source to verify that this is the current version before use.