INCH-POUND

MIL-P-44087B
17 April 1989
SUPERSEDING
MIL-P-44087A
24 October 1985

MILITARY SPECIFICATION

PARKA, NIGHT CAMOUFLAGE, DESERT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a parka made of cotton/nylon twill material.

1.2 Classification. The parka shall be of one type in the following sizes as specified (see 6.2).

Schedule of Sizes

X-Small
Small
Medium
Large
X-Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-203	- Paper, Kraft, Untreated
V-B-871	- Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-280	- Thread, Gimp, Cotton, Buttonhole
JJ-W-155	- Webbing, Textile, (Cotton, Elastic)
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-B-371	- Braid, Textile, Tubular
MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43701	- Cord, Elastic, Nylon
MIL-C-44034	- Cloth, Twill, Camouflage Pattern, Cotton and Nylon for Desert Uniform

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

* 2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Color Card of America

(Color cards may be available from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variations from the document may appear in the samples, in which case the document shall govern.

* 3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material. The basic material shall be cloth, cotton/nylon, twill, camouflage, desert grid green, class 2 conforming to MIL-C-44034.

* 3.3.1.1 Left buttonhole flap, back neck facing, back waist tunnel, front waist tunnel, hand opening reinforcement, right front facing interlining and reinforcement pieces. The cloth for the left buttonhole flap, back neck facing, front and back waist tunnels, hand opening reinforcement, right front facing interlining and reinforcement pieces shall be camouflage pattern basic material, ground shade cloth, or printed seconds cloth. Ground shade cloth shall be dyed in conformance with class 2 of MIL-C-44034 prior to over printing of the camouflage pattern. Ground shade cloth shall meet the physical, mechanical, and dimensional requirements of the finished fabric. Printed seconds shall be cloth which has been rejected only for defects pertaining to color infrared

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

reflectance or camouflage pattern cited in class 2 of MIL-C-44034. If printed seconds are used, they must be marked on the face side with stripes, 3 inches apart across the full width running in a warpwise direction for the length of the entire roll. The strips shall be 1/8 to 1/2 inch wide and shall be applied by the cloth finisher. The color of the stripes shall be black and have a colorfastness to crocking no lower than 6.5 (Munsell scale).

3.3.2 Webbing, elastic. The webbing for bottom of sleeves shall be type II, class 1, 5/16 inch wide, unbleached conforming to JJ-W-155.

3.3.3 Braid, drawcord.

3.3.3.1 Hood, neck, and waist drawcord. The hood, neck and waist drawcord shall be solid tubular cotton braid conforming to type IV, class 1, 4/32 inch in diameter, Olive Green 107 of MIL-B-371.

3.3.3.2 Bottom hem drawcord. The drawcord for bottom hems of parka shall be nylon elastic cord, 3/16 inch diameter, Olive Green 106, type II conforming to MIL-C-43701.

3.3.4 Resin impregnating agent. The resin agent used for dipping or impregnating the ends of the drawcords shall be cellulose acetate or cellulose acetate butyrate, to prevent ravelling. The dipped or impregnated end shall be at least 1/2 inch in length (see 4.4.1.1).

3.3.5 Thread. The thread shall be cotton-covered polyester thread conforming to MIL-T-43548, ticket numbers 50, 2 or 3 ply; 70, 2 ply for seaming and stitching; 50, 2 or 3 ply for bartacking; and 30, 2 or 3 ply for buttonholes and sewing on buttons. The thread shall be dyed Olive Drab S-1, C.A. 66022.

3.3.5.1 Colorfastness. The dyed thread shall show fastness to light and laundering (after 3 cycles), equal to or better than the standard sample (see 6.4). When no standard sample is available, the dyed thread shall show "good" fastness to light and laundering (after 3 cycles).

3.3.6 Gimp. The cotton gimp for reinforcing buttonholes shall be size 8, Olive Drab S-1, C.A. 66022, conforming to type I or II of V-T-280.

3.3.6.1 Colorfastness. The gimp shall show fastness to laundering (after 3 cycles), equal to or better than the standard sample (see 6.4). When no standard sample is available, the dyed gimp shall show "good" fastness to laundering (after 3 cycles).

3.3.7 Buttons. The buttons shall be type II, class D, dull finish, style 26, 30 line conforming to V-B-871. The color shall be Olive Green BP, Cable No. 62016.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

3.3.8 Labels. Each parka shall have an identification label, a size label, and an instruction label conforming to type VI of DDD-L-20, except the label color shall be Medium Green, Cable No. 70034, 70130, or 70131. The labels shall show fastness to laundering.

3.3.8.1 Identification label. The identification label shall conform to class 1.

3.3.8.2 Size label. The size label shall conform to class 2 and contain the following information for each respective size. Descriptive information shall be printed in letters and numerals not less than a minimum 10 point.

X-Small	Small	Medium
Chest: Up to 33 inches	Chest: From 33 to 37 inches	Chest: From 37 to 41 inches
Stock No: NATO Size: 7080/7484	Stock No: NATO Size: 7080/8494	Stock No: NATO Size: 7080/9404

Large	X-Large
Chest: From 41 to 45 inches	Chest: From 45 inches up
Stock No: NATO Size: 7080/0414	Stock No: NATO Size: 7080/1424

3.3.8.3 Instruction label. The instruction label shall conform to class 3 and shall contain the following information:

PARKA, NIGHT CAMOUFLAGE, DESERT

1. Wear as outer garment in desert areas for night camouflage.
2. Fasten drawstrings at waist, bottom, neck and around face to protect against wind and blowing sand.
3. Tie drawstrings around each thigh to provide greater freedom of movement.
4. Wear hood over all headgear including steel helmet.
5. Wear button-in liner for added insulation for night temperature drop or seasonal variations.
6. Wash by hand or machine; make sure all soap is thoroughly rinsed out.
7. DO NOT STARCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

DO NOT REMOVE THIS LABEL

3.3.8.4 Combination identification and instruction label. The identification label (class 1) and the instruction label (class 3) may be combined into one label. The combination label shall conform to the requirements of the class 15 label.

3.3.8.5 Combination size, identification, and instruction label. The identification label (class 1), size label (class 2), and instruction label (class 3) may be combined into one label. The combination label shall conform to the requirements of the class 14 label. The coating requirement shall conform to class 3 label.

3.4 Design. The parka is a single breasted outer garment with hood, with button/buttonhole front closure; two slit type hand openings with flap and button closure; elasticized cuffs; drawcords at neck, hood, waist, and hemline; and buttons on inside for attachment of liner (see figure 1).

3.5 Patterns. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide for the following seam allowances: 1/2 inch for double-lapped and double-stitched seams and 3/8 inch for all other seams unless otherwise indicated. The patterns indicate size, placement of hand openings, and notches for assembly of parts.

3.5.1 List of pattern parts. The component parts of the parka shall be cut from materials as specified and according to the number of parts listed in table I.

TABLE I. List of pattern parts

Material	Nomenclature of parts	Cut parts
Basic material:		
Cotton/nylon twill cloth	Front	2
	Back	2
	Sleeve	2
	Right front facing interlining	1
	Hand opening welts	2
	Left buttonhole flap 1/	1
	Back neck facing 1/	1
	Neck tunnel	1
	Front waist tunnel	2
	Hood	2
	Hand opening flap	2
	Back waist tunnel 2/	1
	Hand opening reinforcement 2/	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

1/ May be cut from printed seconds.

2/ May be cut from ground shade or printed seconds fabric.

3.6 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from the written document appear in figure 1, the written document shall govern.

3.6.1 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams occur. When two or more methods of seams or stitches are given for the same operation, any one may be used. When stitch type 401 is used, the looper (underthread) shall be on the inside of the parka.

3.6.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/4 inch except where ends are turned under or caught in other stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.6.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks, skipped stitches, runoffs, or bobbin runouts occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Except for prestitching, thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

3.6.1.2 Type 401, 502, 503, and 504 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.6.1.1.1a and b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn. Type 301 stitching may be used to repair 401 stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

3.6.2 Buttonholes. Buttonholes shall be the cut after, eyelet end, taper bar type, worked over gimp with not less than four tacking stitches at bar end (not counting crossover stitch). The purling shall be on the outside unless otherwise specified. The cut lengths of buttonholes shall be 3/4 to 7/8 inch unless otherwise specified.

3.6.3 Bartacks. The bartacks shall measure 3/8 to 1/2 inch in length.

3.6.4 Sewn eyelets. Eyelets shall be clean cut and the bight of stitching around the eyelet shall be not less than 1/16 inch and the inside diameter of the finished eyelet shall be 3/16 to 1/4 inch. The eyelets shall have the stitches overlapping not less than 1/16 inch. The stitches per eyelet shall be determined by counting the number of needle penetrations in the outside row of eyelet stitching. The overlapping stitches at the end of the stitching shall be included. When 401 stitch type is used, the purling shall be on the inside of the parka. When 502 or 503 stitch type is used, the purling shall not be pulled to the outside. The thread ends shall be on the inside of the parka.

3.7 Manufacturing operations requirements. The parka shall be made in accordance with the operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed, unless otherwise specified. Any additional basting or holding stitches used to facilitate manufacture are permissible provided the thread does not show on the finished parka.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the material in strict accordance with furnished patterns that show directional lines and marks and notches for proper assembly. Directional lines shall be placed in the warp direction of the material. b. Cut all component parts of the parka out of the same piece of material except buttonhole flap, right front facing interlining, reinforcement pieces, tunnel strips and pocket welts, which may be cut from ends. NOTE: Front and back waist tunnel may be strip cut and placed on rolls. c. All eyelets and button reinforcement pieces shall finish not less than 3/4 inch square and may be cut from printed seconds or ground shade material. d. Cut back waist tunnel of sufficient length and width to conform to operation 15.f. e. Cut drawcords for hood, neck, and waist in the following lengths, ± 1 inch tolerance: Hood (1 each) - 48 inches, all sizes Waist (1 each) - 54 inches, Size X-Small - 58 inches, Size Small - 62 inches, Size Medium - 66 inches, Size Large - 70 inches, Size X-Large						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) Neck (1 each) - 44 inches, Size X-Small - 45 inches, Size Small - 46 inches, Size Medium - 47 inches, Size Large - 48 inches, Size X-Large f. Cut 2 lengths of elastic webbing for bottom of sleeves 11-1/2 inches ± 1/2 inch for all sizes.						
*	g. Cut 2 nylon elastic drawcords for bottom hem in the following lengths, ± 1 inch tolerance. - 40 inches, Size X-Small - 42 inches, Size Small - 44 inches, Size Medium - 46 inches, Size Large - 48 inches, Size X-Large						
2.	Component marking. a. Mark, ticket, and bundle all components of the parka except those parts cut from ends to ensure correct size, proper assembly, and a uniform shade throughout the parka. b. The use of ink pad numbering machine, rubber stamp, or pencil will be acceptable provided the numbers do not show through the outside of the parka.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Component marking. (cont'd) c. Any method of marking may be used except: 1. Metal fastening devices. 2. Sew on type tickets. 3. Adhesive type tickets which leave traces of adhesive on the material upon removal of the ticket.						
3.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2 shall be removed from production and replaced with nondefective and properly matched components.						
4.	Labeling. Sew labels on all four sides, not more than 3/16 inch from edges, to parka as follows: a. Size label. Centered (1/2 inch off center tolerance) on inside back seam of parka, 1/2 to 3/4 inch down from bottom edge of back neck facing or top edge may be caught when stitching facing to parka. b. Identification label. Centered (1/2 inch off center tolerance) on inside back seam of parka directly below size label. c. Instruction label. Centered (1/2 inch off center tolerance) on inside back seam of parka directly below identification label.	301	LSbj-1	9-11	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Labeling. (cont'd)						
	d. Combination identification and instruction label. (see 3.3.8.4) Attach as previously specified in (b).						
	e. Combination size, identification, and instruction label. (see 3.3.8.5) Attach as previously specified in (a).						
5.	Make hood.						
	a. Fold darts on inside as indicated by pattern and stitch.	301 or 401	OSf-1 OSf-1	9-11 9-11	50 50	50 70	
	b. Fold darts toward back and stitch folded edge to hood 1/16 to 1/8 inch from edge. The outside edge of darts shall face the front of hood.	301	OSe-1	9-11	50	50	
	c. Stitch center seam with a double lapped, double stitched seam. The seam may be lapped in either direction but the hood and center back seam shall be lapped in the same direction.	301 or 401	LSc-2 LSc-2	9-11 9-11	50 50	50 50	
	d. Stitch eyelet reinforcement pieces to hood position as indicated by marks on pattern.	301 or 401	LSbj-1 LSbj-1	9-11 9-11	50 50	50 70	
	e. Make sewn eyelets, at marks indicated on pattern, through reinforcement piece (see 1.c).	401 or 502 or 503		19-24 per eyelet 26-32 per eyelet 26-32 per eyelet	50 50 50	50 50 50	
	f. Insert hood drawcord through eyelets.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make hood. (cont'd)						
	g. Make a 1-1/8 inches ± 1/8 inch hem on front of hood with raw edge turned in and with the stitching 1/16 to 1/8 inch from edge, enclosing the drawcord within the fold. Do not catch drawcord in the stitching.	301	EFb-1	9-11	50	50	
	or						
	h. The drawcord may be threaded after hemming.						
	i. Knot each end of drawcord.						
	j. Hem bottom edge of hood from front to neck edge, with raw edge turned in and the stitching 1/16 to 3/32 inch from turned-in edge. The hem shall finish 1/2 to 5/8 inch wide.	301	EFb-1	9-11	50	50	
	k. Anchor the center of the drawcord on center seam of hood with a vertical bartack.	Bartack		28 per bartack	50	50	
6.	Make pocket flaps.						
	a. Fold buttonhole tab portion, as indicated on pattern, and stitch across tab with the row of stitching superimposed on the fold line located above buttonhole marks indicated on pattern.	301		9-11	50	50	
	b. Make two buttonholes in each tab, as indicated on pattern, with inside edge of eyelet 3/8 to 1/2 inch from bottom folded edge. The buttonholes shall be parallel to the front edge of pocket flap.	Buttonhole		52-56 per buttonhole	30	50	
	c. Fold flap in half, as indicated by marks on pattern, with buttonhole tab within the fold. Stitch the side raw edges.	301	SSe-2(a)	9-11	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make pocket flaps. (cont'd)						
	d. Turn flap and tab right side out, force out corners and edges, and stitch bottom and side edges 3/16 to 1/4 inch from edges. Bottom edge of buttonhole tab shall not be caught in the bottom edge stitching.	301	SSe-2(b) and OSf-1	9-11	50	50	
	or						
	e. Fold buttonhole tab portion of flap as indicated by marks on pattern (fabric back to back) and make two vertical buttonholes in each tab, as indicated on pattern, with inside edge of eyelet 3/8 to 1/2 inch from bottom folded edge.	Button-hole		52-56 per button-hole	30	50	
	f. Fold tab on tab fold line (fabric face to face), fold opposite raw edge of flap (fabric face to face) even with raw edges of tab, enclosing tab within the fold, and stitch side raw edges.	301	SSe-2(a)	9-11	50	50	
	g. Turn flap and tab right side out. Force out corners and edges. Stitch bottom and side edges 3/16 to 1/4 inch from edge. Bottom edge of buttonhole tab shall not be caught in the bottom edge of stitching.	301	SSe-2(b)	9-11	50	50	
7.	Attach hand opening reinforcement pieces.						
	a. Position hand opening reinforcement pieces to the underside of parka fronts, at marks indicated on pattern. Turn in raw edges, and stitch to parka 1/16 to 1/8 inch from edge.	301	LSd-1	9-11	30	30	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make hand opening.						
	a. Position pocket welt on outside of parka with raw edge aligned with the cut line, and stitch 3/8 inch from raw edge.	301 or 401	LSbj-1	9-11 9-11	50 50	50 70	
	b. Position flaps with buttonhole tabs face up, on the outside of parka, with the raw edge of outside of flaps aligned with the cut line and abutting raw edge of welt, and stitch 3/8 inch from raw edge. The buttonhole tab portion shall not be caught in the stitching.	301 or 401	LSbj-1	9-11 9-11	50 50	50 70	
	c. Slash cut line and tongue notch ends.						
	d. Turn pocket welt to inside of parka over seam allowance forming a 3/8 inch welt. Raise stitch through the welt seam 1/16 inch from turned edge.	301		9-11	50	50	
	e. Turn under the 3/8 inch seam allowance on the side and bottom raw edges of pocket welt on inside of parka and stitch 1/8 inch from edges through all plies. The tongue notch ends may be caught in this operation or in operation 8.f.	301	LSd-1	9-11	50	50	
	f. Turn pocket flap down to finished position, insert raw edge of buttonhole tab through opening to inside of parka, turn in side and top raw edges, and stitch 1/8 inch from turned edges.	301	LSd-1	9-11	50	50	
	g. Bartack the top of the pocket flaps at each end with bartack parallel to the line of stitching on the pocket flaps.	Bartack		28 per bartack	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make hand opening. (cont'd)						
	or						
	h. Fold welt in half.						
	i. Slash front reinforcement piece along cut line and tongue notch ends.						
	j. Align raw edges of front, welt and reinforcement piece along slash line, and stitch 3/8 inch from raw edges. The welt shall finish 3/8 inch in width.	301 or 401	SSa-1	9-11	50 50	50 70	
	k. Align raw edges of front, flap and reinforcement piece along slash line, and stitch 3/8 inch from raw edges.	301 or 401	SSa-1	9-11	50 50	50 70	
	l. Insert ends of welt between front and reinforcement piece. Stitch each welt end through front and reinforcement piece tongue notch.	301 or 401	SSa-1	9-11	50 50	50 70	
	m. Turn flap and reinforcement piece to their finished positions. Raise stitch front folded edge along welt and ends of welt 1/16 inch from folded edge continuing along flap 1/8 inch from folded edge.	301	SSq-2	9-11	50	50	
	n. Turn under raw edges of reinforcement piece, and stitch to front 1/16 to 1/8 inch from folded edge.	301	LSbj-1	9-11	50	50	
	o. Bartack the top of the pocket flaps at each end with bartack parallel to line of stitching on the pocket flaps.	Bartack		28 per bartack	50	50	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make hand opening. (cont'd)						
	or						
	p. Fold welt in half and edge stitch 1/16 inch from folded edge.	301		9-11	50	50	
	q. Slash front and reinforcement piece as indicated by marks on pattern and tongue notch ends. Align raw edges of front welt and reinforcement piece along slash line, and stitch 3/8 inch from raw edges. The welt shall finish 3/8 inch in width.	301 or 401	SSa-1	9-11	50 50	50 70	
	r. Insert welt ends between front and reinforcement piece. Turn reinforcement piece to inside of parka, and raise stitch across ends catching tongue notches and welt ends. Continue raise stitching on front along welt 1/16 inch from folded edge.	301	SSq-2	9-11	50	50	
	s. Turn under raw edges of reinforcement piece, and stitch to front 1/16 to 1/8 inch from folded edge.	301	LSbj-1	9-11	50	50	
	t. Turn raw edge of front and welt to face side of parka, and stitch 1/8 inch from folded edge.	301	EFa-1	9-11	50	50	
	u. Stitch flap to front over raw edge of hand opening with two rows of stitching 3/16 to 1/4 inch apart.	301	OSf-2	9-11	50	50	
	v. Bartack top of pocket flap at each end with bartack parallel to the line of stitching on the pocket flaps.	Bartack		28 per bartack	50	50	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make left buttonhole flap.						
	a. Fold left buttonhole flap in half lengthwise, and stitch bottom edge.	301 or 401	SSe-2(a) SSe-2(a)	9-11 9-11	50 50	50 70	
	b. Turn, work out corner, and stitch bottom edge 3/16 to 1/4 inch from edge. Continue stitching along front folded edge maintaining gage of stitching.	301	SSe-2(b) and OSf-1	9-11 9-11	50 50	50 50	
	or						
	c. Fold left buttonhole flap in half lengthwise, turn in raw edges at bottom, and stitch bottom and front folded edge, 1/4 to 3/8 inch from edge.	301	SSe-1 and OSf-1	9-11 9-11	50 50	50 50	
	d. Make five horizontal buttonholes in the left buttonhole flap as indicated by marks on pattern, with the inside edges of eyelets 5/8 to 3/4 inch from edge.	Button-hole		52-56 per button-hole	30	50	
	e. Overedge stitch back raw edges of buttonhole fly.	503 or 504	SSa-1	8-12	50	50	
10.	Make backs.						
	a. Hem each side of vent opening at center back from notch (indicated on pattern) to bottom of parka. Hem shall be 1/4 to 3/8 inch wide.	301	EFb-1	9-11	50	50	
	b. Join backs with a double lapped, double stitched seam, 3/16 to 5/16 inch gage.	301 or 401	LSc-2 LSc-2	9-11 9-11	50 50	50 70	
	c. Tack top of vent opening across center back seam with a horizontal bartack.	Bartack		28 per bartack	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make sleeve darts and attach button reinforcement piece.						
	a. Fold darts on inside, as indicated by pattern, and stitch.	301 or 401	OSf-1 OSf-1	9-11 9-11	50 50	50 70	
	b. Fold dart toward wrist, and stitch folded edge to sleeve 1/16 to 1/8 inch from edge.	301	OSe-1	9-11	50	50	
	c. Stitch button reinforcement piece to inside of sleeve positioned as indicated by marks on pattern.	301 or 401	LSbj-1 LSbj-1	9-11 9-11	50 50	50 70	
12.	Join shoulder seams and set sleeves.						
	a. Join shoulders with a double-lapped and double-stitched seam, 3/16 to 5/16 inch gage. The backs shall be lapped on fronts.	301 or 401	LSc-2 LSc-2	9-11 9-11	50 50	50 70	
	b. Set sleeves with a double-lapped, double-stitched seams. The body shall be lapped on the sleeve.	301 or 401	LSc-2 LSc-2	9-11 9-11	50 50	50 70	
13.	Join underarm - side seams.						
	Join underarm and side seams in one continuous operation with a double lapped, double stitched seam 3/16 to 5/16 inch gage. The fronts shall overlap the back. The sleeve joining seam shall not be staggered more than 1/2 inch at underarm (measured from center of seam to center of seam).	301 or 401	LSc-2 LSc-2	9-11 9-11	50 50	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Hem sleeve and insert elastic.						
	a. Place the ends of each elastic (see 1.f) adjacent to each other with one end extending beyond the other 3/4 ± 1/4 inch. Bartack the ends together with the bartack extending across both widths. The elastic shall measure 5 to 5-1/2 inches (half wrist measurement) long in the finished parka.	Bartack		28 per bartack	50	50	
	b. Elastics may be anchored to the sleeve 1/2 to 1 inch from bottom with vertical tacking or bartacking through underarm seam, to hold in position.	301 or		28 per bartack	50	50	
		Bartack		28 per bartack	50	50	
	c. Hem sleeve, enclosing elastic within the fold, with the raw edge turned in. Do not catch elastic in the stitching. The hem shall finish 1/2 to 3/4 inch wide.	301	EFb-1	9-11	50	50	
15.	Attach tunnel strips and drawcord to waist.						
	a. Hem one end of each of the front waist tunnel strips and both ends of the back tunnel strip. The hems shall be 1/4 to 3/8 inch wide.	301	Efa-1 or	9-11	50	50	
		301 or	EFb-1	9-11	50	50	
		401	Efa-1 or	9-11	50	70	
		401	Efb-1	9-11	50	70	
	or						
	b. The raw edges of the ends of the tunnel strips may be turned in 1/4 to 3/8 inch and caught in the tunnel stitching.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Attach tunnel strips and drawcord to waist. (cont'd)						
	c. Make sewn eyelets for waist drawcord on each front at marks indicated on pattern through reinforcement pieces (see 1.c).	401 or		19-24 per eyelet	50	50	
		502 or		26-32 per eyelet	50	50	
		503		26-32 per eyelet	50	50	
	d. Thread drawcord through front eyelets.						
	e. Position front waist tunnel strips on the inside of parka, at marks indicated on pattern, with the unhemmed ends facing front opening.						
	f. Position back waist tunnel strip at marks indicated on pattern. The ends of the tunnel shall begin and end 1/2 to 1 inch from each side seam on the back of the parka. The back waist tunnel shall finish 1 inch to 1-1/8 inches wide.						
	g. Turn in raw edges along sides of tunnel strips 1/4 to 3/8 inch and stitch to parka with the rows of stitching 1/16 to 1/8 inch from edges, and with the drawcord enclosed in the tunnel. Do not catch the drawcord in the stitching.	301	SSat-2	9-11	50	50	
	h. Make four horizontal bartacks, one at each corner of back waist tunnel. Make two horizontal bartacks, one on each back corner of the front waist tunnels. The bartacks shall be superimposed on the tunnel stitching.	Bartack		28 per bartack	50	50	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Attach tunnel strips and drawcord to waist. (cont'd)						
	NOTE: The front waist tunnel strips may be attached after operation 17, in which case the unhemmed ends shall be turned under, and the tunnel strip shall overlap the front facing. The turned under end may be prehemmed or may be stitched to front facing.						
16.	Join front facings and back neck facing.						
	Join ends of back neck facing to right and left front facings and open seams.	301 or 401	SSa-1 SSa-1	9-11 9-11	50 50	50 70	
17.	Make front facings and attach buttonhole flap.						
	a. Position right front facing interlining on inside of right front and, with the edges even, overedge stitch the back raw edges of front facings and bottom edge of neck facing.	503 or 504	SSa-1	8-12	50	50	
	b. Fold fronts to inside at marks indicated on pattern and stitch 1/4 to 3/8 inch from folded edge, catching the right front interlining in the stitching.	301	OSf-1	9-11	50	50	
	c. Position buttonhole flap on left front facing with back edges of flap and facing even. Stitch facing and flap to front 1/16 to 1/8 inch from back edge of flap (the entire length of the flap). The stitching of the facing shall continue along bottom edge of the back neck facing and the back edge of the right front facing. The ends of the waist tunnel shall be caught under the facing (see "NOTE" in operation 15).	301	EFa-1 and SSa-1 and EFa-1	9-11 9-11 9-11	50 50 50	50 50 50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Make front facings and attach buttonhole flap. (cont'd)						
	d. Bartack buttonhole flap to front with five vertical bartacks. The bartacks shall be positioned as follows:	Bartack		28 per bartack	50	50	
	(1) At the bottom of buttonhole flap.						
	(2) The remaining four shall be centered between the buttonholes (± 1/2 inch).						
18.	Attach hood and neck tunnel.						
	a. Stitch neck of hood to body and facing, matching center seams (1/4 inch off center tolerance).	301 or	SSa-1	9-11	50	50	
		401	SSa-1	9-11	50	70	
	b. Hem both ends of neck tunnel. The hems shall finish 3/16 to 1/4 inch wide.	301	EFa-1 or	9-11	50	50	
		301 or	EFb-1	9-11	50	50	
		401	EFa-1 or	9-11	50	70	
		401	EFb-1	9-11	50	70	
	or						
	c. The raw edges of the ends of the neck tunnel may be turned in 3/16 to 1/4 inch and caught in the tunnel stitching.						
	d. With raw edges of neck tunnel and body even, stitch through all plies.	301 or	SSa-1	9-11	50	50	
		401	SSa-1	9-11	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Attach hood and neck tunnel. (cont'd)						
	e. Turn tunnel to finished position, turn in raw edges, and stitch to hood, enclosing the drawcord within the tunnel. Do not catch drawcord in the stitching. The tunnel shall finish 1-1/8 inches ± 1/8 inch in width.	301	LSd-1	9-11	50	50	
	or						
	f. The drawcord may be threaded after tunnel is completed.						
	g. Make a horizontal bartack at each corner of the neck tunnel. The top bartack shall be superimposed on the line of stitching.	Bartack		28 per bartack	50	50	
19.	Hem bottom and insert drawcord.						
	a. Hem bottoms with the raw edges turned in 3/16 to 1/4 inch and with the stitching 1/16 to 1/8 inch from turned-in edge, enclosing the drawcord within the fold. The hem shall finish 1-1/8 inches ± 1/8 inch wide. The drawcord shall not be caught in the stitching of the hem. The drawcords shall extend 6 inches beyond each end of parka.	301	EFb-1	9-11	50	50	
	b. Bartack each end of stitching with horizontal bartacks (four in all).	Bartack		28 per bartack	50	50	
	c. Anchor the drawcord at side seam with a vertical bartack, through side seam hem and drawcord.	Bartack		28 per bartack	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Attach buttons.						
	a. Attach buttons to parka as follows:						
	(1) Five buttons on right front shall be as indicated by marks on pattern. The buttons shall be positioned 1 inch to 1-1/4 inches from finished front edge (measurement taken from center of buttons).	101 or 301		14-16 per button 14-16 per button	30 30	 30	
	(2) Five buttons on each front facing shall be positioned as indicated by marks on pattern. The buttons shall be positioned 1/2 to 3/4 inch from back edge of facing (measurement taken from center of buttons).						
	(3) Two buttons on back neck facing shall be positioned as indicated by marks on pattern. The buttons shall be positioned 1/2 to 3/4 inch from bottom edge of facing (measurement taken from center of button).						
	(4) Two buttons on each hand opening shall correspond with the eyelet end of flap buttonholes.						
	(5) Two buttons shall be positioned on each side of the sleeves, one centered on sleeve through reinforcement piece and one on the underarm seam, 2-1/4 to 2-1/2 inches from bottom of finished sleeve.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil/ Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Prepare for packing. a. Trim all thread ends and remove loose threads. b. Clean spots and stains. c. Knot ends of all drawcords.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

* 3.8 Measurements. The finished parka shall conform to measurements shown in table III.

TABLE III. Table of measurements in inches

	X-Small	Small	Medium	Large	X-Large	Tolerance
1/2 Face opening 1/	15-3/8	15-3/8	15-3/8	15-3/8	15-3/8	± 1/4
Sleeve length 2/	24-1/8	24-3/8	24-5/8	24-7/8	25-1/8	± 1/2
1/2 Chest 3/	21-3/8	23-3/8	25-3/8	27-3/8	29-3/8	± 1/2
Back length 4/	43-1/8	43-5/8	44-1/8	44-5/8	45-1/8	± 3/4

1/ Measure from top of hood (center of joining seam) to bottom of hem.

2/ Measure along underarm seam from base of armhole to bottom edge of sleeve.

3/ With parka closed, measure across front, at base of armhole, from folded edge to folded edge.

4/ Measure from center of hood joining-seam to bottom of parka.

3.9 Workmanship. The finished parka shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements; however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.4.1.1 Component and material certification. A certificate of compliance may be acceptable as evidence that the dipping or impregnating compound conforms to the requirement specified in 3.3.4.

4.4.2 End item visual examination. The end item shall be examined for the defects listed in table IV. The lot size shall be expressed in units of parkas. The sample unit shall be one parka. The inspection level shall be II

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 15.0 for major and minor A combined defects, and 40.0 for total (major, minor A, and minor B combined) defects.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Material defects and damages	Any weakening defect such as a smash, multiple float, or loose slub	101		
	Any hole, cut, tear, mend, burn, or needle chew	102		
	One or more drill holes exposed	103		
	Variation in shade within an outside part			301
	Variation in shade between parts (except parts which may be cut from ends)		201	
Cleanness	Any spot or stain on outside		202	
	Thread ends not trimmed, loose threads, or two or more shade tickets not removed throughout garment (to be scored only when the condition exists on major portion of parka)			302
	Any basting or holding threads visible on the finished parka			303
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein)	104		
	Any operation not performed as specified (unless otherwise classified herein)		203	
Cutting	Any part not cut in conformance with directional lines indicated on patterns or not cut in accordance with specification requirements	105		
Seams and stitching	Accuracy of seaming:			
	-seams twisted, puckered, or pleated (unless otherwise classified herein)		204	
	-any part of parka caught in an unrelated operation or stitching	106		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching - (cont'd)	-end of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch			304
	-stitching overlapping ends of thread break less than 1/2 inch			305
	-ends of a continuous line of stitching overlapped less than three stitches on labels or less than 1/2 inch on all other stitching			306
	Gage of stitching and seam allowances:			
	-irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged (to be scored only when condition exists along major portion of seam)		205	
	-width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified			307
	-edge or raised stitching sewn too close to edge resulting in damage to cloth		206	
	Stitches broken or missing (except buttonholes):			
	All stitching except on hems:			
	-up to 1/4 inch, inclusive			308
	-more than 1/4 inch up to 1 inch, inclusive		207	
	-more than 1 inch	107		
	Hems:			
	-up to 1/2 inch, inclusive			309
	-more than 1/2 inch		208	
	Skipped stitches (except buttonholes) or run-off stitches:			
	-1/4 to 1/2 inch long, inclusive			310
	-more than 1/2 inch		209	
	Raw edge more than 1/2 inch long		210	
	Seam or stitch type not as specified		211	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching - (cont'd)	Looper thread of 401 stitch type finishing on the outside of parka	108		
	Stitches per inch (to be scored only when condition exists for a distance of more than 1/2 the length of the seam):			
	-more than maximum specified			311
	-less than minimum specified		212	
	Stitch tension:			
	-loose tension resulting in a loose seam	109		
	Loose tension (exposed loops of top or bottom thread):			
	-for a distance of 1 to 2 inches (inclusive)			312
	-for a distance of more than 2 inches		213	
	Tight tension (stitches break when strain is applied in the direction of the seam or stitching)	110		
	Loose tension on bartack			313
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped or run-off stitches occur.			
	On double stitched seams a seam is considered open when one or both stitches of the seam is opened:			
	-up to 1/4 inch, inclusive			314
	-more than 1/4 inch up to 3/4 inch, inclusive		214	
	-more than 3/4 inch	111		
Bartacks	One or more bartacks missing, insecure, or misplaced			315
	Less than 3/8 or more than 1/2 inch long			316

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Buttonholes	One or more omitted, added, or misplaced	112		
	Not caught in fabric, causing stitches to pull away from fabric	113		
	Gimp omitted			317
	One or more broken or two or more continuous skipped stitches			318
	Ragged edges			319
	Uncut buttonhole			320
	End stitched with less than four stitches per bar end (see 3.6.2):			
	-one buttonhole		215	
	-two or more buttonholes	114		
	Cut length of buttonhole less than 3/4 inch or more than 7/8 inch		216	
	Purling not finishing toward the outside of parka		217	
Buttons	One or more buttons missing, insecurely sewn, broken, defective, or misplaced			321
Eyelets	One or more omitted	115		
	Stitches not securely caught in fabric (stitches pull away from fabric)	116		
	One or more broken or more than two continuous skipped stitches in one or or more eyelets		218	
	Loose stitch tension			322
	Purling of 401 stitch type on outside of parka			323
	Purling of 502 or 503 stitch type not at needle penetration or inside purling pulled to outside			324
	Thread ends on outside of parka			325
	Number of stitches per eyelet not as specified			326
	Inside diameter of eyelet less than 3/16 or more than 1/4 inch			327
	Cloth cut-out in center of eyelet not removed			328

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Eyelets - (cont'd)	Thread ends less than 1/8 inch long		219	
	Thread ends more than 1/2 inch long			329
Labels	Size or combination size, identification, and instruction:			
	-missing, incorrect, or illegible	117		
	-top edge of label less than 1/2 inch or more than 3/4 inch below bottom edge of back neck facing (when not caught in facing stitching)			330
	-off center by more than 1/2 inch			331
	-not stitched on all four sides			332
	Identification:			
	-missing, incorrect, or illegible		220	
	-off center by more than 1/2 inch			333
	-not stitched on all four sides			334
	Instruction or combination identification and instruction:			
	-missing, incorrect, or illegible	118		
	-off center by more than 1/2 inch			335
	-not stitched on all four sides			336
	-the label stitching through printing			337
Drawcords	Cord caught in tunnel stitching	119		
	Dipping or impregnation omitted on:			
	-one or both ends of two or more drawcords		221	
	-one or both ends of one drawcord			338
	Knots omitted on both ends of one or more cords			339
	Cut length of drawcords (measured with knots untied):			
	-less than minimum tolerance permitted		222	
	-more than maximum tolerance permitted			340
	Dipping or impregnation less than 1/2 inch in length			341

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Hood	Outside folded edge of pleats not turned toward front			342
	One or both pleats omitted		223	
	Eyelet reinforcement piece omitted		224	
	Hem (tunnel) more than 1-1/4 inches or less than 1 inch wide			343
	Bottom hem more than 5/8 or less than 1/2 inch wide			344
	Neck tunnel more than 1-1/4 inches or less than 1 inch wide			345
	Hood center seam in opposite direction to center back seam			346
	Hood center seam and center back seam of body staggered more than 1/4 inch			347
Front closure	Buttons and buttonholes out of alignment causing a bulge or twist on front when buttoned		225	
	Inside edge of buttonhole eyelets less than 5/8 or more than 3/4 inch from edge of buttonhole flap			348
	The ends of front waist tunnels not caught under or not overlapped on front facings (whichever is applicable)			349
	One or more buttonholes positioned vertically		226	
	Fronts uneven:			
	-at top by 3/8 inch or more		227	
	-at bottom by 5/8 inch or more			350
Hand openings	Hand opening reinforcement piece omitted		228	
	Buttons and buttonholes out of alignment causing a bulge or twist on flap when buttoned		229	
	Inside edge of eyelet less than 3/8 or more than 1/2 inch from bottom of fold edge of flap			351
	Raw edges of welt not turned under on inside of parka			352

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Back	Front parts overlapping back parts at shoulders			353
	Backs overlapping fronts at side seams			354
	Vent opening hems less than 1/4 inch or more than 3/8 inch wide			355
Waist tunnel	Ends of back waist tunnel finishing less than 1/2 or more than 1 inch from side seams on back of parka			356
	Eyelet reinforcement pieces omitted on front waist tunnel		230	
Sleeves	Folded edge of dart not turned toward wrist		231	
	Folded edge of dart not stitched down			357
	Sleeve overlapping body			358
	Sleeves reversed, e.g., right sleeve set in left armhole	120		
	Armhole seam staggered more than 1/2 inch at side seam			359
	Half wrist measurement less than 5 or more than 5-1/2 inches	121		
	Elastic caught in the stitching of hem	122		
	Sleeve hem (tunnel) less than 1/2 or more than 3/4 inch wide			360
	Button reinforcement piece omitted			361
	Buttons positioned less than 2-1/4 or more than 2-1/2 inches from bottom of finished sleeve			362
Hem	Bottom hems less than 1 inch or more than 1-1/4 inches wide			363

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

4.4.3 End item dimensional examination. The end items shall be examined for the defects listed below. The lot size shall be expressed in units of parkas. The sample unit shall be one parka. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Facing opening Sleeve length 1/2 Chest Back length	Any measurement deviating from the dimension and tolerance specified in table III shall be scored as a measurement defect
Equal length of sleeves	Sleeves uneven in length by 1/2 inch or more shall be scored as a size measurement defect

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number per container is more or less than required

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each fully buttoned parka shall be laid flat, front up. The hood shall be folded down full length and the sleeves folded one over the other across the chest. The sides shall be adjusted by folding to attain a width of approximately 23 inches. The bottom edge shall be folded over so that the parka length is 29 inches. The parka shall then be folded in half across the length. The completely folded parka shall measure approximately 23 by 14-1/2 inches. Five folded parkas of one size only shall be evenly stacked in a bundle, alternated end for end, and securely tied with cotton tape or twine approximately four inches from each end.

5.1.2 Commercial. Parkas shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Twenty parkas of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container, conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, four in depth within a shipping container. Inside dimensions of each container shall be approximately 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4. Shipping containers

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). When unit loads are strapped, strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. Twenty parkas of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, four in depth within a shipping container. Inside dimensions of each container shall be approximately 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Parkas, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), parkas, packed as specified in 5.2.2 or 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The parka is a component of the desert combat uniform and is intended for wear by military personnel to provide nighttime camouflage in desert areas.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Sizes required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3, and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids.

* 6.5 Subject term (key word) listing.

Cloth, cotton/nylon twill
Outerwear
Outerwear, evening

6.6 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU

Review activities:

Army - MD
Navy - MC
DLA - CT

Preparing activity:

Army - GL

(Project 8415-0664)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

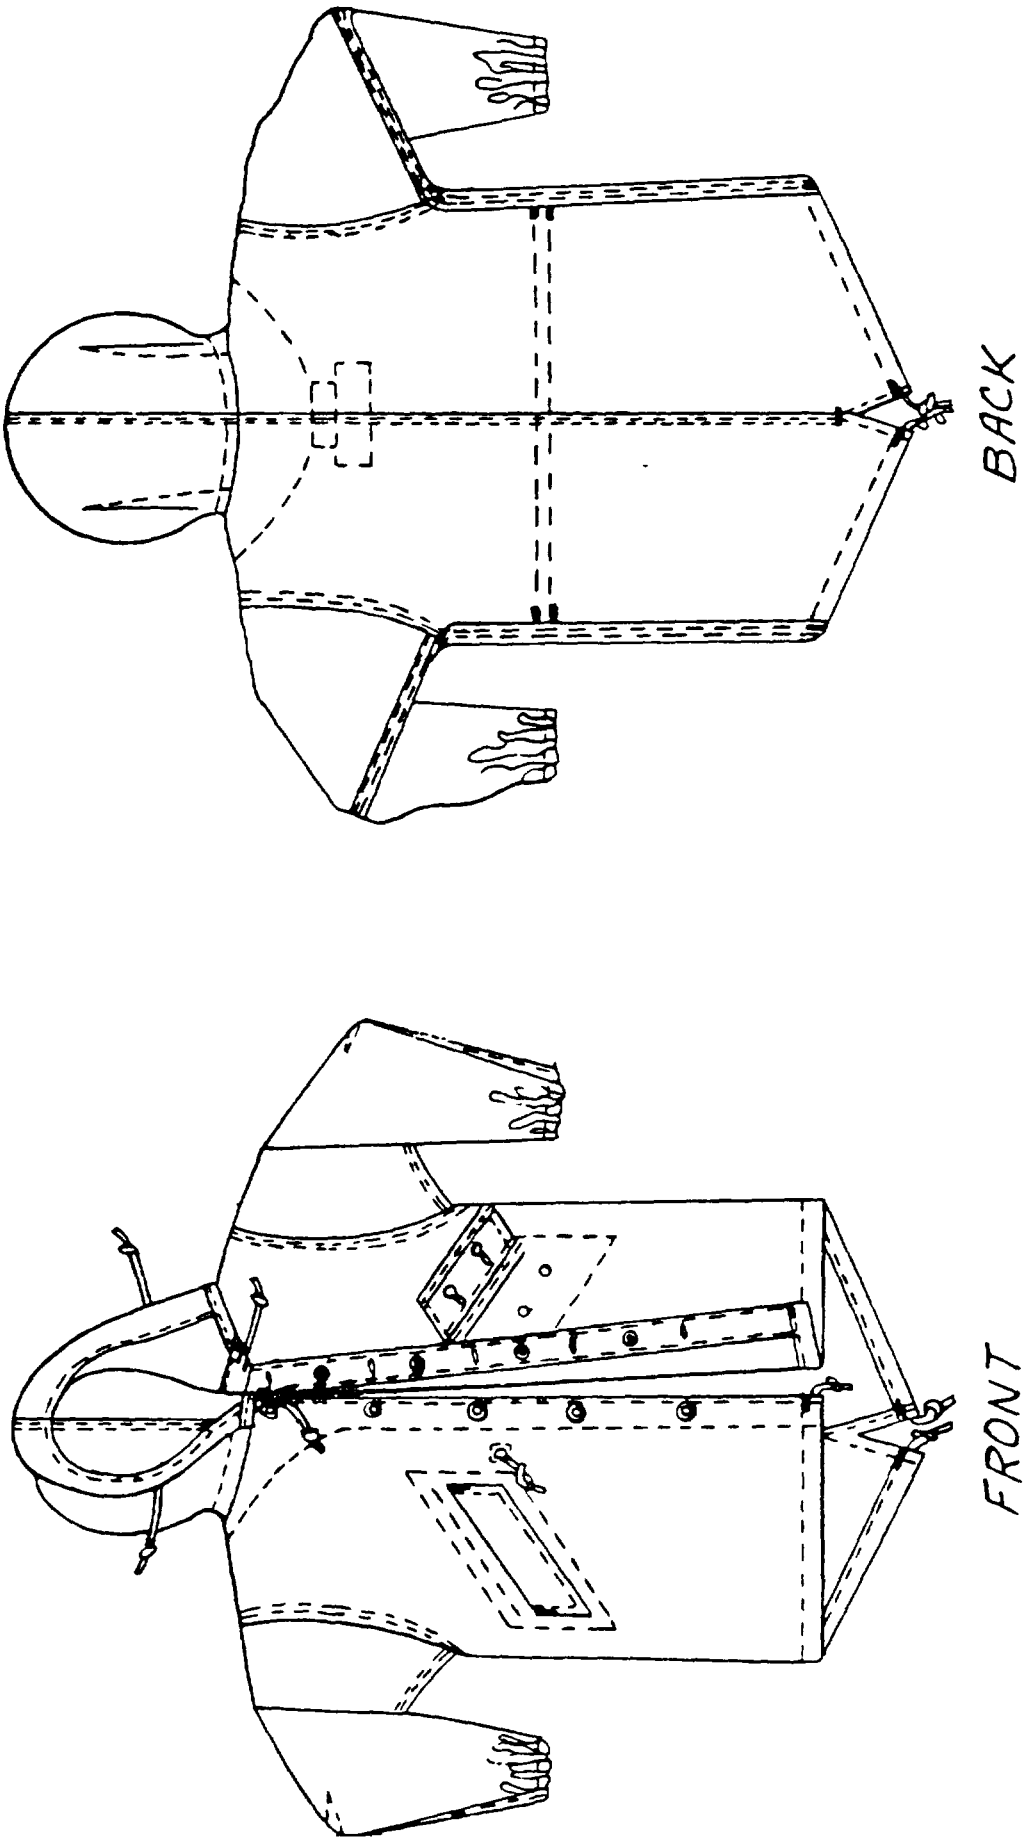


FIGURE 1. Parka, night camouflage, desert.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-P-44087B	Parka, Night Camouflage, Desert

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US Army Natick Research, Development, and
Engineering Center
Natick, MA 01760-5014

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research, Development,
and Engineering Center
ATTN: STRNC-ES
Box 14A
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:49Z
Check the source to verify that this is the current version before use.