MIL-P-44115B
31 March 1992
SUPERSEDING
MIL-P-44115A
28 July 1987

MILITARY SPECIFICATION

PLATFORM, ASSEMBLY, CARGO, AERIAL DELIVERY, TYPE V

This Specification is approved for use by all Departments and Agencies of Department of Defense.

1. SCOPE

1.1 Scope. This document rovers one type of airdrop platform system designated as type V, and all components thereto. The modular platforms assembled or disassembled as required. Platforms of various lengths are formed by assembling the appropriate components (see 6.1).

1.2 Classification. Platforms and components shall be of the following item numbers, as specification (see 6.2).

Item:

1 - Panel Assembly, Main
2 - Panel Assembly, Rear
3 -Side Rail, 8ft
12 ft
16 ft
20 ft
24 ft
28 ft
32 ft

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5017, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AFSC N/A FSC 1670

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

4 - Roller Pad, 8 ft
12 ft
16 ft
20 ft
24 ft
28 ft
32 ft

5 - Nose Bumper, Type V Platform
6 - Bracket Assembly, Extraction, Type V Platform
7 - Bushing, Side Rail, Type V Platform
8 - Tandem Link Assembly,Type V Platform
9 - Clevis Assembly, Type V Platform
10 - Bracket, Extraction Force Transfer Actuator Assembly, Type V Platform

2. APPLICABLE DOCUMENTS

2.1 Goverment documents.

2.1.1 Specifications, standards, and handbooks. The following specifications for a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and StandardS (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-203	Paper, Kraft, Untreated
PPP-B-26	Bag, Plastic (General Purpose)
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-H-1581	Hardware (Fasteners and Related Items) Packaging of

MILITARY

MIL-C-52950	crates, wood, open and Covered

STANDARDS

MILITARY

MIL-STD-105	Sapling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-147	Palletized Unit Loads

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publication form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

U.S ARMY NATICK RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER

11-1-2780 - Platform, Airdrop, Type V

{Copies of drawings are mailable f ran the U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-UX, Natick, MA01760-5017.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2) .

AMERICAN SOCIETY FOR TESTING MATERIALS (SSTM)

D) 3950 " standards Specification for Strapping, Plastic (and Seals)

(Application for copies should beaddressed to the American Society for Testing and Materials, 1916 Race Street, Phiadephila PA, 19103-1187.)

(Non-Government Standards and other publications are normally available from organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample be be subjected to first article inspection (see 6.3) in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

3.2 Materials and components. Materials and components shall he as specified on Drawing 11-1-2780 and all subsidiary drawings and parts lists and as specified herein. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3 Construction. Assembliesand components shall be conconstructed in accordance with the required of Drawing 11-1-2780 and all subsidiary drawing and parts lists.

3.4 Marking Equipments, assemblies, components, and parts shall be marked for identification in accordance with MIL-STD-130.

3.5 Workmanship. The end item shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Resoonsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor’s overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuing that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quaity conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 End item visual examination. The end items, defined as completely fabricated units of the component or subassembly of the Type V platform being purchased, shall be examined for the applicable defects listed in table X. The lot size shall be expressed in units of platforms. The sample unit shall be one platform. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.0 for major defects and 2.5 for total (major and minor combined) defects.

TABLE 1. End item visual defects

Examine	Defect	Classification	
		Major	Minor
Find paint	color not as specified		201
	Tacky (not dry to touch)	101	
	Color separation		202
	Incomplete		203
	Blistered, peeling, flaking, or otherwise not adherent		204
	Embedded dirt or other foreign matter	102	
Construction and workmanship	Any component missing, cracked, fractured, misaligned, or malformed (unless otherwise classified herein)	103	
	Any component not assembled or joined as specified	104	
	Any sharp edges, burrs, or metal slivers		205

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

TABLE I. End items defects (cont'd)

Examine	Defect	Classification	
		Major	Minor
Construction and workmanship (cont'd)	Any machine screw or rivet missing, loose or wrong type	105	
	One rivet not properly set (i.e. , head cracked, inked, ringed or not flush)		206
	More than one rivet not properly set	106	
Marking	Missing, incomplete, not legible, or otherwise not as specified		'207

4.4.3 End item dimensional examination. Examination of the end items. defined as completely fabricated units of the component or subassembly of the Type V platform being purchased, shall be examind for the dimension specified on the applicable component or subassembly drawing(s) as listed in the contract or purchase order. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of platforms. The sample unit shall be one platform. The impection level shall be S-3 and the AQL, expressed in terns of defects per hundred units, shall be 1.0.

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaging The inspection level shall be S-2 and the AQL. expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of inproper size, location, sequence, or method of application
Materials	Any component missing, damged, or not as specified
Workmanship	Inadequate application of components, such as: imcomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number per container is more or less than requi@red

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressd in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. load not bonded with required straps as specified.
weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation shall be level A.

5.1.1 Main panel, rear panel or nose burner and hardware assembly. Hardware components for the main panel, rear panel or nose bumper, of the type and quantity specified in Wining 11-1-2780, Shall be packaged in plastic bags conforming to type I or II, style 1, 4 or 5, minimum thickness 0.004 inch, of PPP-B-26.

5.1.2 Extraction bracket and hardware assembly. Hardware components of the type and quantity specified in Drawing 11-1-2780, shall be packed in plastic bags conforming to type I or II, style 1, 4 or 5 minimum thickness 0.004 inch, of PPP-B-26.

5.1.3 EFTA bracket and hardware assembly. Inside and outside bracket and hardware components of the type and quantity specified in Drawing 11-1-2780, shall be packaged in plastic bags conforming to type I or II, style 1, 4 or 5, minimum thickness 0.004 inch, of PPP-B-26.

5.1.4 Tandem link or suspension link and hardware assembly. Hardware components for the tandem link or suspension link shall be packaged in plastic bags confirming to type I or 11, style 1, 4 or 5, minimum thickness 0.004 inch, of PPP-B-26. Each tandem link or suspension shall be completely wrapped in 50-pound basis weight kraft paper conforming to A-A-203.

5.1.5 Clevis and hardware assembly. Each clevis and its hardware shall be packagd in plastic bags conforming to type I or II, 1, 4 OR 5, MINIMUM thickness 0.004 inch, of PPP-B-26.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

5.1.6 Components.

5.1.6.1 EFTA brackets. Ten inside brackets and ten outside brackets shall be packaged in plastic bags conforming to type I. or II, style 1, 4 or 5, minimum thickness 0.004 inch, of PPP-B-26.

5.1.6.2 Side rail bushings, tandem link bushings, or clevis spacers. Fifty bushings or spacers, of one type only, shall be packaged in plastic bags conforming to type I or II, style 1, 4 or 5, minimum thickness 0.004 inch, of PPP-B-26 .

5.1.6.3 Extraction bracket lug. Each lug shall be packaged in a plastic bag conforming to type I or II, style 1, 4 or 5, minimum thickness 0.004 inch, of PPP-B-26.

5.1.6.4 Extraction bracket frame. Each frame shall be packaged in a plastic bag conforming to type I or II, style 1, 4 or 5, minimum thickness 0.004 inch, of PPP-B-26.

5.1.6.5 Extraction bracket bushings. Two bushings shall be packaged in plastic bag conforming to type I or II, style 1, 4 or 5, minimum thickness 0.004 inch, of PPP-B-26.

5.1.6.6 Hardware. Hardware shall be presserved in accordance with level A of PPP-H-1581.

5.2 Packing shall be level A or B, as specified (see 6.2). Note that packing techniques should assure that steel and aluminum components are not in contact with each other (corrosive galvanic action occurs between these two muds). Either top-opening or end-opening style PPP-B-636 boxes shall be acceptable.

5.2.1 Level A. packing. Items preserved as specified in 5.1, shall be packed in cleated plywood box conforming to oversees type, style optional, of PPP-B-601 or a crate conforming to type III, style B of MIL-C-52950.

5.2.2 Level B packing.

5.2.2.1 Main panel and rear panel. Hardware for each component, preserved as specified in 5.1, shall be packed in a fiberboard box conforming to style FPF, grade V3c, V3s or V4s of PPP-B-636. Inside dimensions of the box shall be approximately 18 incheS in lenqth, 2 inches in width and 2-7/8 inches in depth. Each box shall be closed in accordance with method II as specified in the appendix of PPP-B-636. A corrugated fiberboard spacer having approximate dimensions of 18 by 2 inches, shall be glued to one side of the box. An attachment panel constructed from V2s, V3s, or V4s of dimensions and design cited in figure 1, shall be glued to the other side of the box. The entire assembly shall be attached to the component as shown in figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

by strapping conforming to type II, 1/2 by 0.015 inches of ASTM D 3950. Four main panel or four rear panel assemblies, alternately stacked with attached hardware box on opposite ends, shall be packed in a crate conforming to type III, style B or MIL-C-52950. Panels shall be blocked, braced, (anchored) and cushioned and the crate shall be closed and strapped as specified in the appendix of MIL-C-52950 .

5.2.2.2 Nose burner assembly. Hardware, preserved as specified in 5.1, shall be packed in a fiberboard box conforming to style FPF, grade V3c, V3s or V4s of PPP-B-636. Inside dimensions of the box shall be approximately 12 inches in length, 1-1/2 inches in width and 1-1/4 inches in depth. The hardware box shall be inserted inside the bumper. Twenty bumper assemblies shall be packed in a crate conforming to type III, style B or Type II, Style A of MIL-C-52950. Bumpers shall be blocked, braced and cushioned and the crate shall be closed as specified in the appendix of MIL-C-52950.

5.2.2.3 Extraction bracket assembly. Each extraction bracket and its hardware, preserved as specified in 5.1, shall be packed in a shipping container confoming to style RSC, grade V3c, V3s or V4s of PPP-B-636. Inside dimensions of the box shall be approximately 10-7/8 inches in length, 10-1/4 inches in width and 3-1/4 inches in depth. Each box shall be closed in accordance with method 111 as specified in the appendix of PPP-B-636.

5.2.2.4 EFTA bracket assembly. Twenty assemblies, preserved as specified in 5.1, shall be packed in a shipping container conforming to style RSC, grade V3s or V4s of PPP-B-636. Inside dimensions of the box shall be approximately 18 inches in length, 9 inches in width and 8 inches in depth. Each boxshall be closed in accordance with method III as specified in the appendix of PPP-B-636 .

5.2.2.5 Tandem link assembly. Each tandem link and its hardware, preserved as specified in .5.1, shall be packed in a shipping container conforming to style RSC, grade V3c, V3s or V4s of PPP-B-636. Inside dimensions of the box shall be approximately 24-1/4 inches in length, 5-3/4 inches in width and 2-1/4 inches in depth. Each box shall be closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.2.6 Suspension link assembly. Each suspension link and its hardware, preserved as specified in 5.1, shall be packed in a shipping container conforming to style RSC, grade V3c, V3s or V4s of PPP-B-636. Inside dimensions of the box shall be approximately 20-3/4 inches in length, 5-3/4 inches in width and 2-1/4 inches in depth. Each box shall be closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.2.7 Clevis assembly. Fifty clevises and its hardware, preserved as specified in 5.1, shall be packed in a shipping container conforming to style RSC, grade V3c, V3s or V4s of PPP-B-636. Inside dimensions of the box shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

be approximately 16 inches in length, 8-3/4 inches in width and 5-1/2 inches in depth. Each box shall. be closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.2.8 Side rail and roller pads Twenty 8-foot, 12-foot, 16-foot, and 20-foot rails or pads, of one type A size only, or ten 24-foot, 28-foot, and 32-foot rails or pads, of one type and size only, shall be blocked, braced and skidded in accordance with commercial practice. Inaddition, in the area where the forklift will contact the load, a wood buffer strip shall be constructed.

5.2.2.9 Camponents

5.2.2.9.1 Side rail bushings, tandem link bushings and clevis spacers. Five hundred bushings or spacers, of one type only, preserved as specified in 5.1 shall be packed in a shipping container conforming to style RSC, grade V3c, V3s or V4s of PPP-B-636. Inside dimensions of the box shall be approximately 15-3/4 inches in length, 9-3/4 inches in width and 9 inches in depth. Each box shall be closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.2.9.2 Extraction bracket lug. Five lugs, preserved as specified in 5.1, shall be packed in a shipping container conforming to style RSC, grade V3c, V3s or V4s of PPP-B-636. Inside dimensions of the box shall be approximately 14-1/2 inches in length, 6–1/4 inches in width and 3-1/4 inches in depth. Each box shall be closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.2.9.3 Extraction bracket frame. Five frames, preserved as specified in 5.1, shall be packed in a shipping container conforming to style RSC, grade V3c, V3s or V4s of PPP-B-636. Inside dimensions of the box shall be approximately 10-1/4 inches in length, 9 inches in width and 16 inches in depth. Each box shall be closed in accordance with method III as specified in the appendix of PPP-B-636 .

5.2.2.9.4 Extraction bracket bushings. Twenty bushings, preserved as specified in 5.1, shall be packed in a shipping container conforming to style RSC, grade V3c, V3s or V4s of PPP-B-636. Inside dimensions shall be approximately 13 inches in length, 10 inches in width and 6-1/2 inches in depth. Each box shall be closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.2.9.5 Hardware. Hardware, preserved as specified in 5.1, shall be packed in accordance with level B of PPP-H-1581.

5.3 Palletization. Assemblies and components, of one type only, packed as specified in 5.2, shall be palletized in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV or type V

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

in accordance with MIL-STD-147. Each prepared load shall be bonded with straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 104 for extraction on bracket assemblies, number 26 for EFTA bracket assemblies, number 10 for tandem link assemblies, number 42 for suspension link assemblies, and number 97 for clevis assemblies, number 97 for side rail bushings, tandem link bushings and clevis spacers, number 99 for extraction bracket lugs, number 108 for extraction bracket frames, and number 17 for extraction bracket bushings in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition of any special marking required by the contract or purchase order, unit packs, shipping containers and unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The platforms or components are the major components of an airdrop system used as a base for supporting cargo loads during transportation, extraction from aircraft and ground inpact . Platforms 8, 12, 16, 20, 24, 28, and 32 feet in length can be assembled in the field by utilizing the appropriate components as shown on Drawing 11-1-2780. The platform is used for airdrop from C-130 and C-141 aircraft equipped with platform restraint rail systems.

6.2 Acgusition requirements. Acquistion documents must specify the following:

a. Title, number, and date of this specification.
b. Item number, nomenclature and length required (when applicable) (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2*2).
d. When a first article is required (see 3.1, 4.3, and 6.3).
e. Level of packing required (see 5.2).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of Federal Acquisition Regulation (FAR) 52.209-4. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

6.4 Subject term (key word) listing

Airdrop system
Extraction bracket
EFTA bracket
Nose bumper
Tandem link
Suspension link

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing activity:m

Army - GL

(Project 1670-0791)

Custodians:

Army - GL
Navy - AS
Air Force - 99

Review activities:

Army -AV
Air Force 11, 82

User activity:

Navy-MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:00Z
Check the source to verify that this is the current version before use.

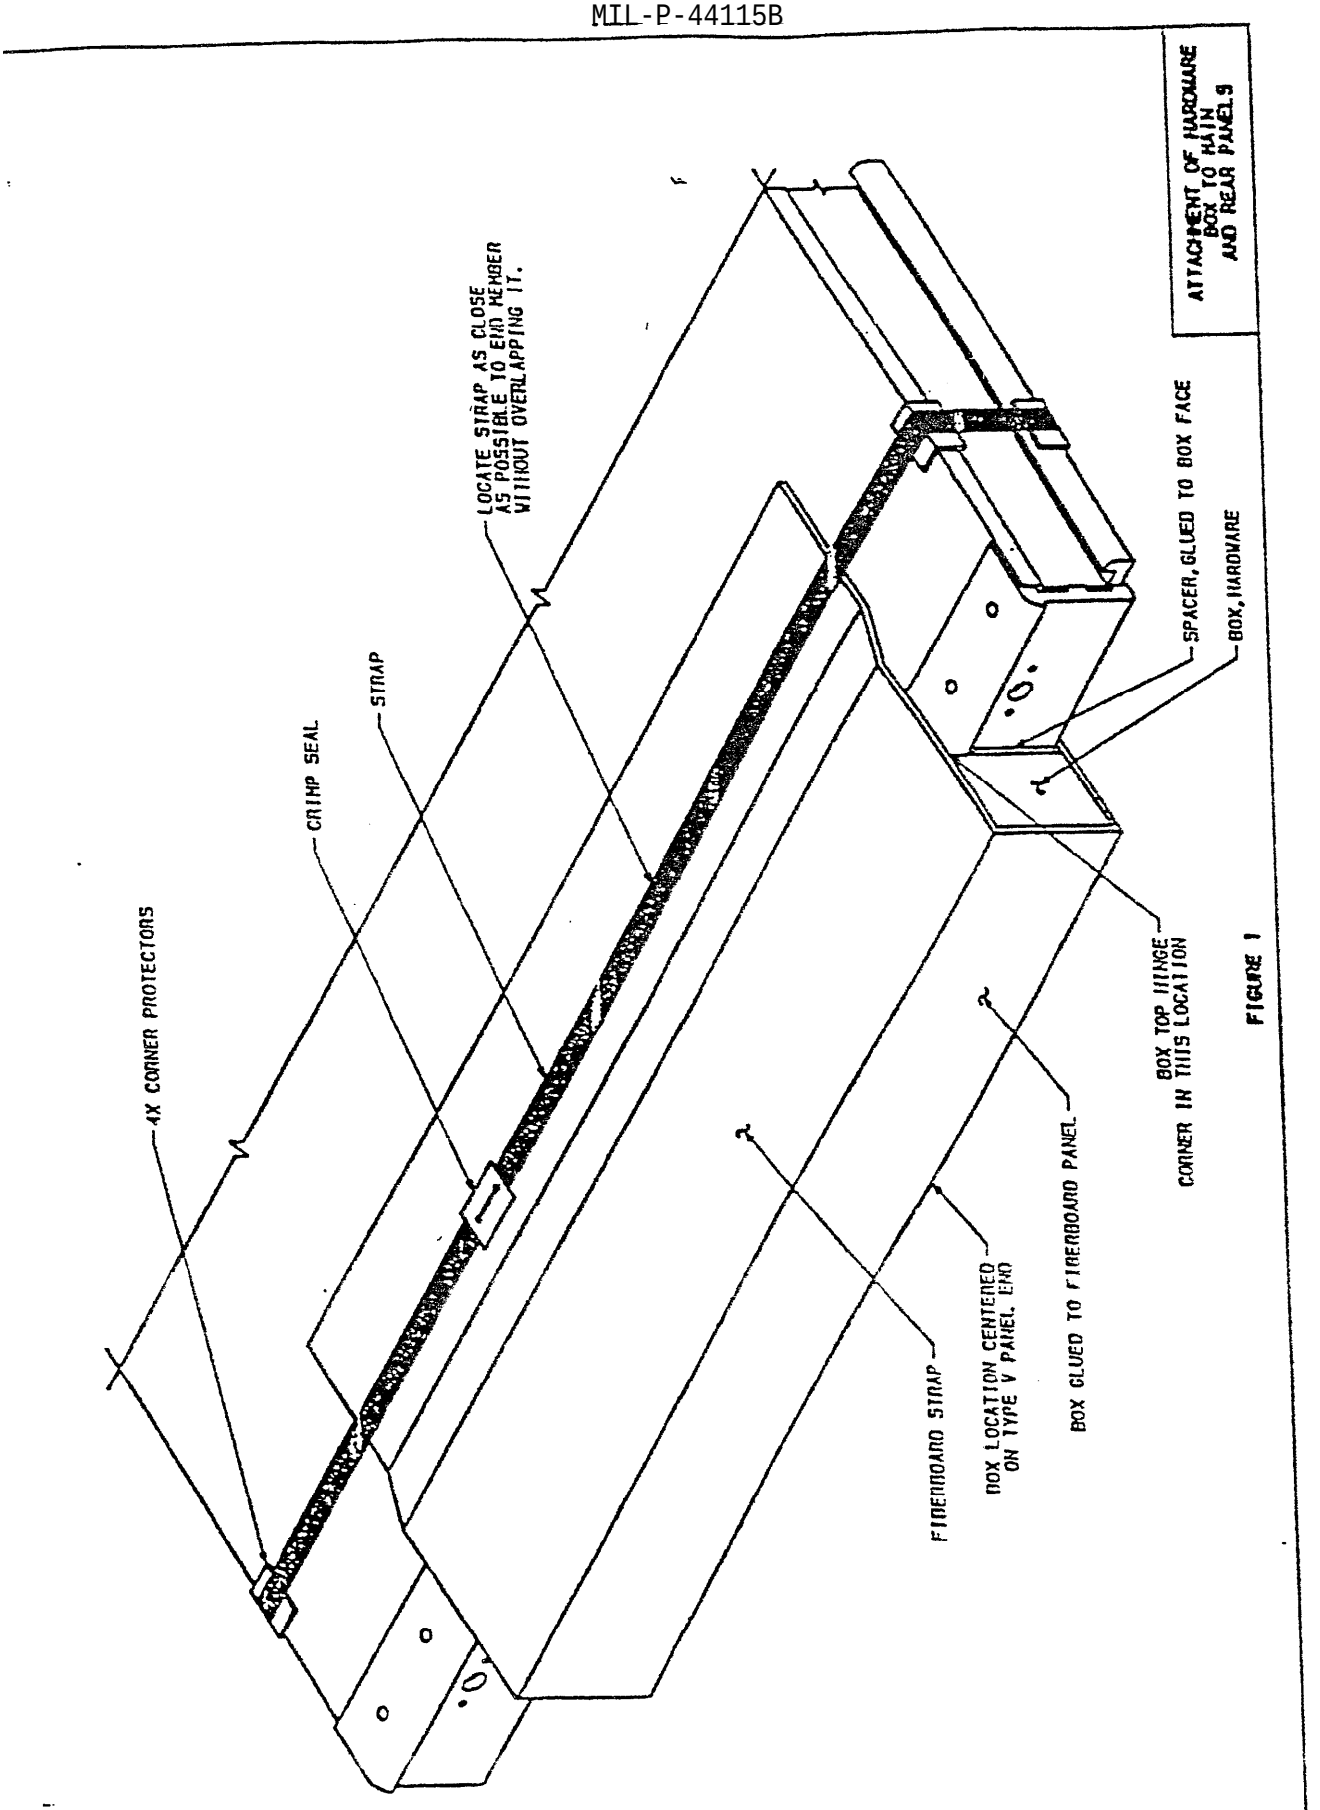


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-22T00:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-44115B	1992 March 31

3. DOCUMENT TITLE

PLATFORM, ASSEMBLY, CARGO, AERIAL DELIVERY, TYPE V

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (*Include Area Code*) (1) Commercial	(2) AUTOVON/DSN
U.S. Army Natick RD&E Center	508-651-4531	256-4531
c. ADDRESS (*Include Zip Code*) Commander, U.S. Army Natick RD&E Center ATTN: STRNC-UXT Natick, MA 01760-5017	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-0-22T00:00Z
Check the source to verify that this is the current version before use.