INCH-POUND

MIL-S-44102B(GL)
13 June 1989
SUPERSEDING
MIL-S-44102A (GL)
13 September 1984

MILITARY SPECIFICATION

SKIRT, WOMAN'S, CLASSIC DESIGN, POLYESTER/WOOL

This specification is approved for use by the U.S. Army Natick Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers classic design, polyester/wool woman's and junior's serge skirts.

1.2 Classification. The skirts shall be of one type in the sizes as specified in table I (see 6.2).

TABLE I. Schedule of sizes

Short	Short plus	Regular	Regular plus	Long	Long plus
For Women:					
6S	6 S+	6R	6 R+	6L	
8S	8 S+	8R	8 R+	8L	
10S	10 S+	10R	10 R+	10L	10 L+
12S	12 S+	12R	12 R+	12L	12 L+
14S	14 S+	14R	14 R+	14L	14 L+
16S	16 S+	16R	16 R+	16L	16 L+
18S	18 S+	18R	18 R+	18L	18 L+
20S	20 S+	20R	20 R+	20L	

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

TABLE I. Schedule of sizes (cont'd)

Short	Short plus	Regular	Regular plus	Long	Long plus
For Juniors:					
3S	3+	3R	3+	3L	3+
5S	5+	5R	5+	5L	5+
7S	7+	7R	7+	7L	7+
9S	9+	9R	9+	9L	9+
11S	11+	11R	11+	11L	11+
13S	13+	13R	13+	13L	13+
15S	15+	15R	15+	15L	15+
17S	17+	17R	17+	17L	17+

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	-	Fasteners, Slide, Interlocking
V-T-276	-	Thread, Cotton
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-B-371	-	Braid, Textile, Tubular
MIL-C-823	-	Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

MIL-T-43548 - Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43718 - Cloth, Polyester; Polyester and Cotton; Polyester and Rayon, for Pockets

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets
MIL-STD-1609 - Provisions for Evaluating Quality of Women's Skirts

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

COLOR ASSOCIATION OF THE UNITED STATES, INC.

Department of Defense Standard Shades

(Standard shades may be available from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927. If standard shades are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:54Z
Check the source to verify that this is the current version before use.

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material. The basic material shall be type III, class 3 polyester/wool serge cloth, Army Green 344, conforming to MIL-C-823.

3.3.2 Interlining material. The material for the waistband interlining shall be natural, bleached, or black polyester, polyester and cotton, or polyester and rayon twill cloth conforming to class 2 of MIL-C-43718, except that nonfibrous material content and colorfastness requirements for perspiration and crocking shall not apply.

3.3.3 Tape. The tape to be furnished with skirts which do not have bottoms overedge stitched (see table III, operation 16.b.) shall be 1/2 $\pm$ 1/16 inch wide, plain weave, woven of continuous filament rayon yarn. The color shall approximate the color of the basic material. The tape shall show "good" fastness to wet dry cleaning and crocking when tested as specified in 4.4.1.

3.3.4 Hanger loop braid. The material for the hanger loops shall conform to type IX, class 1 of MIL-B-371. The color shall approximate the basic material and show "good" fastness to crocking and wet dry cleaning. As an alternate, these hanger loops may be made from the tape specified in 3.3.3.

3.3.5 Label. Each skirt shall have a combination size, identification, and instruction label conforming to type VI, class 14 of DDD-L-20. The label shall show fastness to crocking and dry cleaning. The instruction part of the label shall state the following:

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:54Z
Check the source to verify that this is the current version before use.

DRY CLEAN ONLY

Use damp cloth for pressing.
Remove gloss marks at edges and
seams with iron and damp cloth.

DO NOT REMOVE THIS LABEL

* 3.3.6 Thread, covered polyester. The thread for stitching shall be cotton- or rayon-covered polyester conforming to MIL-T-43548. The thread size shall be Ticket No. 50-3 or 70-2. The thread shall be dyed Green E, C.A. 66034 and show fastness to wet dry cleaning and light equal to or better than the standard sample. When no standard sample is available, the thread shall show "good" fastness to wet dry cleaning and light.

* 3.3.6.1 Thread, cotton. As an alternate to the thread specified in 3.3.6, cotton thread conforming to V-T-276 may be used as follows:

Type IA2, Ticket No. 0-3 for tacking.
Type IA3, Ticket No. 50-3 or 70-2 for all other operations.

The thread shall be dyed Green E, C.A. 66034 and shall show fastness to wet dry cleaning and light equal to or better than the standard sample. The thread shall show "good" fastness to wet dry cleaning and light.

3.3.7 Gimp. The gimp for reinforcing the buttonhole shall be cotton, type I or II, size 8, Green E, C.A. 66034, conforming to V-T-280. The gimp shall show fastness to wet dry cleaning equal to or better than the standard sample. When no standard sample is available, the gimp shall show "good" fastness to wet dry cleaning.

3.3.8 Buttons. The buttons shall conform to type II, class D, style 20 or 21, size 24-line of V-B-871. The color shall be Army Green BR, Cable No. 62015.

* 3.3.9 Slide fastener, plastic. The slide fastener shall be polyester or nylon continuous element chain with an automatic lock slider, top stop, staple-bottom stop, 7/16 or 9/16 inch width tape conforming to V-F-106, type I, style 3, size LS requirements. The tape shall be Green Cable No. 6654 and shall show "good" fastness to wet dry cleaning.

* 3.3.9.1 Slide fastener option. As an option, the fasteners may be fabricated from a continuous roll of fastener chain in lieu of pre-assembled fasteners. However, the length selected shall be sufficient to enable the stitching along the bottom edge of the waistband to catch the top teeth of the fastener. The top stop is not required when using the above construction.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:54Z
Check the source to verify that this is the current version before use.

* 3.3.9.2 Slide fastener lengths. For all women's sizes, the slide fastener's minimum length shall be 7 inches with the exception of the short and short plus sizes which shall be 6-3/4 inches minimum. For all junior sizes, the slide fastener's minimum length shall be 6-1/4 inches with the exception of the short and short plus sizes which shall be 6 inches minimum.

3.4 Design. The skirt is four-gored with a slide fastener closure at the left side-front with a one button waistband. The skirt has a right hand front waistband pocket, has darts at the waist in the front, and is unhemmed (see figure 1).

3.5 Figures. Figures are furnished for information only. To the extent of any inconsistencies between the written specification and the figures, the specification shall control.

3.6 Patterns. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns shall provide for the following seam allowances:

1/4 inch	5/16 inch
Ends of waistband Bagging of pocket	Attaching pocket to front
3/8 inch	**3/4 inch**
Attaching pocket to waistband Attaching waistband to skirt	Joining side front seams and side back seams

3.6.1 Pattern parts. The pattern parts and applicable material for cutting the skirt parts shall be as specified in table II.

TABLE II. List of pattern parts

Material	Nomenclature	Cut parts
Basic material	Front	1
	Back	1
	Side	2
	Front pocket	1
	Back pocket	1
	Waistband	1
	Placket	1
Interlining material	Waistband interlining	1

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:54Z
Check the source to verify that this is the current version before use.

3.7 Construction.

3.7.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in table III shall conform to FED-STD-751. Where two or more seams or stitching types are given for the same operation, any one of them may be used. When stitch type 401 is used, the looper (under thread) shall be on the inside of the skirt. Seam allowances shall be maintained with seams sewn so that raw edges, run-offs, twists, pleats, puckers, or open seams will not result. Thread tension shall be maintained so that there is no tight or loose stitching. All seams shall start and finish evenly.

3.7.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/2 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewed.

3.7.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Except for prestitching, thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.7.1.2 Type 401, 502, 503, 515, 516, and 519 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.7.1.1.1a. and b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn. Type 301 stitching may be used to repair type 401 stitching.

3.7.1.3 Bartacking. Bartacking shall be 1/4 $\pm$ 1/16 inch long, shall be 1/8 $\pm$ 1/32 inch wide and shall contain 21 stitches (minimum). Bartacks shall be free from thread breaks and loose stitching.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:54Z
Check the source to verify that this is the current version before use.

3.7.2 Buttonhole. The buttonhole shall be cut-first, eyelet-end square-bar type (which shall be bartacked on the end in a separate operation). The finished cut shall be 5/8 to 3/4 inch, worked over gimp, with the purling on the outside of the skirt. The buttonhole shall be clean cut with the stitching securely caught in the fabric and gimp ends pulled through. Additives used to secure the ends of the stitching or to stiffen the fabric prior to stitching the buttonhole are prohibited.

3.7.3 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns, provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three tying, overlapping, or back stitches are used to secure the ends of the stitching.

* 3.7.4 Thread ends. All thread ends that are visible on the finished skirt shall be trimmed to a length of not more than 1/4 inch, except dart ends and 401 chains shall be trimmed to 1/2 inch minimum.

3.8 Repairs. Repairs such as mends, darns, patches, or splices are not permitted on the skirts.

3.9 Manufacturing operations requirements. The skirts shall be manufactured in accordance with operation requirements specified in table III. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching to facilitate manufacture is permissible provided the thread is removed or does not show on the finished skirt.

3.9.1 Pressing. All pressing as required in table III shall be performed with a heated pressing iron or machine set at a suitable temperature for synthetics. Any additional under-pressing to facilitate manufacture is permissible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

TABLE III.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting.						
	a. Spread the material without tension so that the cut parts from the top and bottom plies will match the pattern.						
	b. Cut the skirts in strict accordance with the patterns furnished which show directional lines, size, and notches for assembly of parts. Directional lines shall be placed in the warp direction of the material.						
	c. Cut all basic parts of the skirt out of the same piece of material, except placket and pocket which may be cut from ends. The pocket and placket pieces shall approximate the shade of the skirt.						
	d. Cut the braid or tape for hanger loops (two each) of sufficient length to measure 1-1/2 inches + 1/4 inch long (folded) in the finished skirt (see operations 9 and 11).						
	e. Cut hem tapes not less than 65 inches long (see operation 16.b.).						
	f. Cut the waistband interlining in accordance with patterns furnished which show directional lines and size for assembly of all parts. Place directional lines in warp direction of the material.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as specified in MIL-STD-1609, are excluded and replaced with non-defective and properly matched material.						
3.	Shade and size markings. a. Mark, ticket, or bundle all parts to ensure uniform shade, correct size, and proper assembly of the skirt. b. Any method of marking may be used except: 1. Metal fastening devices. 2. Sew-on type tickets. 3. Adhesive type tickets which leave traces of adhesive on the material upon removal of the ticket.						
4.	Make darts on front. a. Fold darts as indicated by notches on pattern and stitch, tapering to nothing 1/2 to 5/8 inch below drill hole.	301	OSf-1	12-14	50-3	50-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make darts on front. (cont'd)						
	b. Press darts flat with inside folded edge toward center on front of finished skirt.						
5.	Make pocket and attach label.						
	a. Center label on face side of back pocket piece and stitch on all four sides 1/16 to 1/8 inch from edges. The label shall face the wearer on the finished skirt.	301	LSbj-1	12-14	50-3	50-3	
	b. Superimpose pocket pieces and safety stitch along sides and bottom edge.	515 or 516 or 519	SSa-2	10-14	50-3 (chain stitch) and 70-2 (overedge)	50-3 70-2	
6.	Attach pocket.						
	a. Position front pocket on outside right front (as worn), centered on dart, with top edges of pocket and top of front even.						
	b. Notch top of front and front ply of pocket on top (leaving ply with label unnotched). Notch 5/16 inch toward waistline seam and not beyond.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Attach pocket. (cont'd)						
	c. With label pocket ply seam out of the way, stitch through top of front pocket ply and front from notch to notch.	301	SSa-1	12-14	50-3	50-3	
	d. Turn seam allowances toward pocket, and with pocket up, edge stitch through pocket and seam allowances 1/16 to 3/32 inch from seam along face side.	301		12-14	50-3	50-3	
	e. Bring pocket into finished position, with seam allowances up and even to top of front. Place a 1/4 inch horizontal bartack at each corner pocket opening at the turned edge. The bartacks shall be through both plies of pocket and the front. The pocket opening shall measure not less than 3-1/2 inches nor more than 3-5/8 inches.	1/4 inch bartack		21 per tack	50-3	50-3	
7.	Join front to sides and back to sides.						
	a. Starting at waistline with notches matched, stitch front to sides leaving opening for placket on left side; stitch back to sides. The width of the seams after pinking (operation 7.b.) shall be not less than 5/8 inch. Depth of pinking shall be 1/8 to 3/16 inch.	301 or 401	SSa-1 SSa-1	12-14 12-14	50-3 50-3	50-3 70-2	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Join front to sides, and back to sides. (cont'd)						
	b. Pink all seams, placket side and bottom, placket opening, and bottom edge of skirt. Depth of pinking shall be 1/8 to 3/16 inch.						
	- or -						
	c. Pink and stitch seams in one operation maintaining seam allowance. Depth of pinking shall be 1/8 to 3/16 inch.						
	- or -						
	d. As an alternate to pinking, the placket may be overedge stitched.	502 or 503	EFd-1	8-10	70-2	70-2	
	e. As an alternate to pinking, the bottom of the skirt may be overedge stitched.	502 or 503	EFd-1	8-10	70-2	70-2	
	f. Press seams open.						
8.	Attach slide fastener to placket and to skirt.						
	Finished appearance. The placket shall be smooth and flat. The tape at top of fastener shall extend into the waistband on the finished skirt, and the stops at top of fastener shall be not more than 1/4 to 3/8 inch from bottom of waistband. The front skirt shall completely cover the slide fastener when						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Attach slide fastener to placket and to skirt. (cont'd)						
	slide fastener is closed, and the front skirt shall overlap the back skirt slightly at the bottom of placket without pleats or puckers on the outside. The stitching shall not interfere with the operation of the slider. The bottom stop on slide fastener shall be positioned 1/8 to 1/4 inch above bottom of placket opening.						
	a. Fold the placket piece in half lengthwise. Place slide fastener on placket with the center of the closed chain 5/8 to 3/4 inch from folded edge and the top stops 3/4 to 7/8 inch from top raw edge. Stitch left fastener tape to placket 1/8 to 3/16 inch from edge of chain along the side nearest to the raw edge of placket.	301	SSa-1	12-14	50-3	50-3	
	b. Position top end of placket even with top of skirt on left front side body, with the center of the chain 1/8 to 3/16 inch from folded edge of skirt and stitch 1/16 to 1/8 inch from folded edge through fastener tape and placket piece, following the curve of the hip. Do not stretch fabric. The placket shall not extend more or less than 3/4 to 7/8 inch forward from fold of skirt.	301	LSd-1	12-14	50-3	50-3	
	c. Stitch right half of fastener tape to front raw edge of skirt opening, so chain edge finishes 3/16 to 1/4 inch from finished folded skirt edge. Follow the curve of the hip and do not stretch the fabric.	301	LSbj-1	12-14	50-3	50-3	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Attach slide fastener to placket and to skirt. (cont'd)						
	d. Fold front opening in line with side seam and stitch to fastener tape, forming a welt 1/2 to 9/16 inch wide; stitch across the bottom of welt to the side seam, catching the placket and ends of fastener tapes in the stitching. The stitching shall be 1/8 to 3/16 inch from the chain back edge, and the welt shall cover the slide fastener when closed.	301		12-14	50-3	50-3	
9.	Make hanger loop stripping (optional).						
	Fold hem tape in half lengthwise and stitch edges together (see operation 1.d.).	301	EFu-1	12-14	50-3	50-3	
10.	Make waistband.						
	Position waistband interlining (twill cloth) on inside of waistband even with bottom raw edge of waistband, and stitch the top edge of interlining through the waistband 1/8 to 3/16 inch from edge of twill cloth.	301 or 401	LSbj-1	12-14	50-3 50-3	50-3 70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T23:54Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Attach waistband and hanger loops.						
	Finished appearance. The finished waistband shall measure 1 ± 1/8 inch in width. The hanger loops shall be positioned over the right front side seam on back of placket.						
	a. The waistband may be folded in half lengthwise and pressed prior to stitching to the skirt.						
	b. Stitch waistband to top of skirt on the inside, working fullness in evenly between notches. Catch hanger loops, top ends of fastener tape, darts, seams, label pocket ply, and placket piece in stitching.	301	Bsg-2(a)	12-14	50-3	50-3	
	NOTE: Notches must be matched exactly so that excessive fullness in top of skirt will be eased into waistband across the back and side panels only.						
	c. Fold waistband in half lengthwise; seam straight ends; trim, turn, and work out corners. On the front end, continue stitching around bottom corner to form extension.	301	SSe-2(a)	12-14	50-3	50-3	
	- or-						
	d. As an alternate, straight ends and extension of waistband may be seamed, trimmed, and turned prior to setting to waist.	301	SSe-2	12-14	50-3	50-3	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Attach waistband and hanger loops. (cont'd)						
	e. The front extension of the waistband shall measure 3/4 ± 1/8 inch beyond fold of welt to the finished edge of tab. The back edge of waistband shall finish even with placket edge.						
	f. Turn under free edge of waistband and top stitch to skirt on outside from waistband placket edge to edge of extension. The top stitching shall be 1/16 to 3/32 inch from folded edge. Care shall be taken to avoid closing waist pocket opening during waistband attachment.	301	BSg-2(b) or SSe-2(b)	12-14	50-3	50-3	
12.	Make buttonhole.						
	Finished appearance. The buttonhole shall be cut-first, eyelet-end square-bar type. The inside edge of the eyelet shall be 1/4 to 3/8 inch from the end of waistband in accordance with marks on patterns. The buttonhole shall be centered (1/8 inch off center tolerance) on waistband.						
	a. Make a 5/8 to 3/4 inch finished cut length buttonhole, worked over gimp, on front left end of waistband with the purling on the outside of the finished waistband with gimp ends pulled through.	Button-hole		52-54 not including tack	50-3	50-3	
	b. The square-bar buttonhole shall be bartacked in a separate operation.	1/4 inch bartack		21 per bartack	50-3	50-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T23:54Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Attach button.						
	Mark and sew a 24 line button centered on waistband to correspond with the buttonhole in waistband extension. The stitching shall penetrate all plies of the waistband.	Hand or		4-6 per button double thread	50-3		
		101		14-16 per button	50-3		
		or 301		12-14 per button	50-3	50-3	
14.	Clean skirt.						
	Trim thread ends (see 3.7.4) to 1/2 inch maximum and remove all loose threads, spots, stains, and shade tickets.						
15.	Press skirt.						
	a. Press the entire skirt.						
	b. Remove gloss marks, wrinkles, and impression marks.						

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Prepare for packing. a. Examine skirt. b. When the bottom is not overedge stitched, attach an envelope containing the tape (see operations 1.e. and 7.e.) to the right hanger loop by string.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The unhemmed skirts shall conform to the finished measurements in tables IV and V.

* TABLE IV. Finished measurements for women (inches)

	Size								Tolerance
	6	8	10	12	14	16	18	20	
1/2 waist 1/ 2/	12	12-1/2	13	13-3/4	14-1/2	15-1/4	16-1/4	17-1/4	± 1/4
1/2 waist (plus sizes) 1/ 2/	12-1/2	13	13-1/2	14-1/4	15	15-3/4	16-3/4	17-3/4	± 1/4
1/2 hip 1/ 3/	18-1/2	19	19-1/2	20-1/4	21	21-3/4	22-3/4	23-3/4	± 3/8
1/2 hip (plus sizes) 1/ 3/	19-1/2	20	20-1/2	21-1/4	22	22-3/4	23-3/4	24-3/4	± 3/8
1/2 sweep 1/ 4/	22-1/2	23	23-1/2	24-1/4	25	25-3/4	26-3/4	27-3/4	± 3/8
1/2 sweep (plus sizes) 1/ 4/	23-1/2	24	24-1/2	25-1/4	26	26-3/4	27-3/4	28-3/4	± 3/8
Length:									
Short 1/ 5/	26-1/8	26-3/8	26-5/8	26-7/8	27-1/8	27-3/8	27-5/8	27-7/8	± 1/2
Regular 1/ 5/	27-5/8	27-7/8	28-1/8	28-3/8	28-5/8	28-7/8	29-1/8	29-3/8	± 1/2
Long 1/ 5/	29-7/8	30-1/8	30-3/8	30-5/8	30-7/8	31-1/8	31-3/8	31-5/8	± 1/2

1/ The skirt shall be buttoned with the slide fastener closed, laid flat on a table, and measured as follows:

2/ Measure from folded edge to folded edge at center of waistband.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:54Z
Check the source to verify that this is the current version before use.

3/ - Measure across skirt at bottom of side opening from folded edge to folded edge, shorts 1/2 inch below side opening, regulars 1 inch below side opening, and longs 1-1/2 inches below side opening.

4/ - Measure along unhemmed bottom from folded edge to folded edge.

5/ - Measure from bottom edge of waistband at center front to bottom edge.

* TABLE V. Finished measurements for juniors (inches)

	Size								Tolerance
	3	5	7	9	11	13	15	17	
1/2 waist 1/ 2/	11-1/4	11-3/4	12-1/4	12-3/4	13-3/8	14-1/8	14-7/8	15-5/8	± 1/4
1/2 waist (plus sizes) 1/ 2/	11-3/4	12-1/4	12-3/4	13-1/4	13-7/8	14-5/8	15-3/8	16-1/8	± 1/4
1/2 hip 1/ 3/	17-3/4	18-1/4	18-3/4	19-1/4	19-7/8	20-5/8	21-3/8	22-1/8	± 3/8
1/2 hip (plus sizes) 1/ 3/	18-3/4	19-1/4	19-3/4	20-1/4	20-7/8	21-5/8	22-3/8	23-1/8	± 3/8
1/2 sweep 1/ 4/	21-3/4	22-1/4	22-3/4	23-1/4	23-7/8	24-5/8	25-3/8	26-1/8	± 3/8
1/2 sweep (plus sizes) 1/ 4/	22-3/4	23-1/4	23-3/4	24-1/4	24-7/8	25-5/8	26-3/8	27-1/8	± 3/8
Length:									
Short 1/ 5/	25-5/8	25-7/8	26-1/8	26-3/8	26-5/8	26-7/8	27-1/8	27-3/8	± 1/2
Regular 1/ 5/	27-1/8	27-3/8	27-5/8	27-7/8	28-1/8	28-3/8	28-5/8	28-7/8	± 1/2
Long 1/ 5/	29-3/8	29-5/8	29-7/8	30-1/8	30-3/8	30-5/8	30-7/8	31-1/8	± 1/2

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:54Z
Check the source to verify that this is the current version before use.

1/ The skirt shall be buttoned with the slide fastener closed, laid flat on a table, and measured as follows:

2/ Measure from folded edge to folded edge at center of waistband.

3/ - Measure across skirt at bottom of side opening from folded edge to folded edge, shorts 1/2 inch below side opening, regulars 1 inch below side opening, and longs 1-1/2 inches below side opening.

4/ - Measure along unhemmed bottom from folded edge to folded edge.

5/ - Measure from bottom edge of waistband at center front to bottom edge.

3.10 Workmanship. The finished skirt shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

4.1.3 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine validity of the certification.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined in accordance with provisions of MIL-STD-1609 for visual and dimensional examinations.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this document or applicable purchase documents. In addition to testing provisions contained in subsidiary specifications, testing shall be performed on components listed in table VI for characteristics noted. Unless otherwise indicated, testing shall be conducted in accordance with methods prescribed in FED-STD-191. The sample unit for testing the tape shall be 3 yards, and the lot size shall be expressed in yards. When the data in the "Determinations per sample unit" and the "Results reported as" columns are not specified in the table, they shall be as required by the referenced test method. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

TABLE VI. Test methods

Component	Characteristic	Requirement paragraph	Test method	Determinations per sample unit	Results reported as
Tape, rayon	Material identification	3.3.3	1500	-	1/
	Width	3.3.3	5020	1	-
	Colorfastness				
	- crocking	3.3.3	5651	-	-
	- wet dry cleaning	3.3.3	5622	-	-

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for this characteristic.

* 4.4.2 End item visual examination. The end items shall be examined for visual defects in accordance with the provisions of MIL-STD-1609.

* 4.4.3 End item dimensional examination. The end items shall be examined for dimensional defects in accordance with the provisions of MIL-STD-1609.

* 4.4.4 Packaging examination. The fully packaged end items shall be examined in accordance with the provisions of MIL-STD-1609.

* 4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packing. Each skirt shall be laid out flat. A sheet of 20 pound minimum basis weight kraft paper measuring approximately 26 by 22 inches shall be placed on top of the skirt. Two lengthwise parallel folds shall be made by folding the skirt and paper as a unit, resulting in a folded width of 12 inches. When the width of the kraft paper exceeds that of the skirt, the excess paper may be folded over to the same width of the skirt. The top of the skirt shall then be folded downward to form a unit pack measuring approximately 18-1/2 by 12 inches. Each folded skirt shall be placed in a flat-style clear polyethylene film bag of 0.0015 inch thickness (± 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and to the formed edges of the bag. The bag may be fabricated from polyethylene film, tubing, or sheeting. The bag shall be not less than 1 inch greater in length than the folded garment. The unsealed opening shall be at the small dimension of the bag.

5.1.1.2 Intermediate packing. Ten skirts of one class and size only, unit packed as specified in 5.1.1.1, shall be packed ten in depth, and alternated end for end within an intermediate fiberboard box conforming to style FTC, type CF, variety SW, class domestic, grade 175 of PPP-B-636. Inside dimensions of the box shall be approximately 18-1/2 inches in length, 12 inches in width, and 4 inches in depth. Two ounces of naphthalene flakes shall be uniformly distributed throughout the contents of each box, except where skirts are made from cloth pretreated with a moth repellent. Box closure shall be secured with 2-inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45 applied at the center of the length opening and extending along the bottom and up each side at least 3 inches.

5.1.2 Commercial. Skirts shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

* 5.2.1 Level A packing. Thirty skirts of one class and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate packs shall be packed flat, three in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 20-1/2 inches in length, 14 inches in width, and 13-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:54Z
Check the source to verify that this is the currentversion before use.

closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the packaging inspection shall be in accordance with the applicable provisions of MIL-STD-1609. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). When unit loads are strapped, strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. Thirty skirts of one class and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A intermediate packs shall be packed flat, three in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 20-1/2 inches in length, 14 inches in width, and 13-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the packaging inspection shall be in accordance with the applicable provisions of MIL-STD-1609.

5.2.2.1 Weather-resistant shipping containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the packaging inspection shall be in accordance with MIL-STD-1609.

5.2.3 Commercial packing. Skirts preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), skirts, packed as specified in 5.2.2 or 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, intermediate packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The skirt is intended for wear by female personnel of the Department of the Army and the Jr. ROTC.

* 6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.2, 4.3, and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids.

* 6.5 Subject term (key word) listing.

Clothing
ROTC
Uniform

6.6 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 20260-21T23:54Z
Check the source to verify that this is the current version before use.

Custodian:

Army - GL

Review activities:

Army - MD
DLA - CT

Preparing activity:

Army - GL

(Project 8410-A694)

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:54Z
Check the source to verify that this is the current version before use.

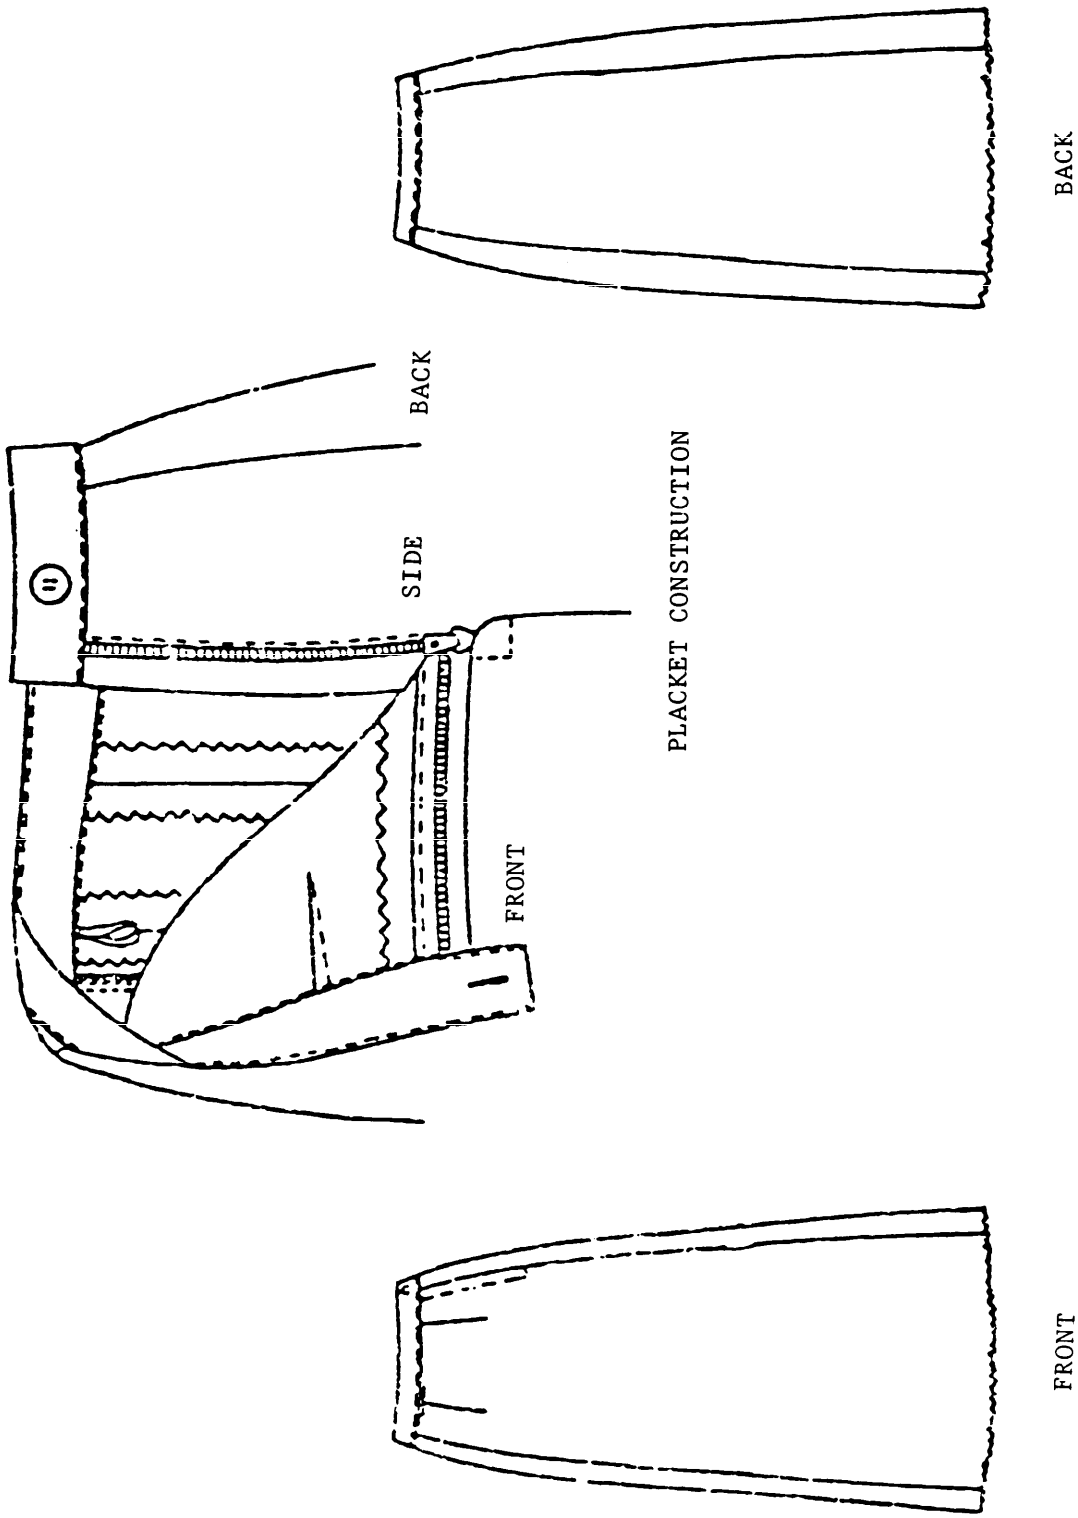


FIGURE 1. Skirt, woman's : classic design, polyester/wool.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US Army Natick Research, Development, and
Engineering Center
Natick, MA 01760-5014

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research, Development,
and Engineering Center
ATTN: STRNC-ES
Box 14A
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-44102B	Skirt, Woman's, Classic Design, Polyester/Wool

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:54Z
Check the source to verify that this is the current version before use.