MIL-C-50652/12(MU)
AMENDMENT 1
7 June 1973

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 10548086

(INTEGRATOR, RATE)

This amendment forms a part of Military Specification MIL-C-50652/12(MU) dated 15 April 1971.

Following Figure 1, add new Figure 1 A.

Table II: Delete in its entirety and substitute new Table II.

Paragraph 4.6.3.7: Add the following:

"Oscilloscope synchronization shall be as follows:

Step 1: Internal +AC

Steps 2 thru 4: External +DC to P1-12

Steps 5 thru 7: External +DC

NOTE: Steps 5 thru 7 require high intensity setting for viewing display."

Custodian:

Army - MU

Preparing Activity:

Army - MU

Project No. 1285-A362

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

TABLE II Δ R OUTPUT

STEP	INPUT SIGNALS P1-2	P1-47	P1-20	P1-51	OUTPUT SIGNALS P1-50	P1-43
1	Logic 0	Logic 0	T3 to T5	Logic 1	Logic 1	T3 pulse at 4KHz PRF \1
2	Logic 0	Logic 1	T6 to T10	Logic 1	Logic 1	T11 strobe pulse at 20KHz \2
3	Logic 0	Logic 1	T3 to T5	Logic 1	Logic 0	T11 strobe pulse at 20KHz PRF \2
4	Logic 1	Logic 1	T3 to T5	Logic 1	Logic 0	All 15 strobe pulses at 20KHz PRF \2
5	Logic 0	Logic 1	T3 to T5	Logic 1	Logic 1	Per Figure 1A - (1)
6	Logic 0	Logic 1	T3 to T5	Logic 1	Logic 0	Per Figure 1A - (2)
7	Logic 0	Logic 1	T6 to T10	Logic 1	Logic 0	Per Figure 1A - (3)

\1 T3 pulse characteristics same at T3/4KC Figure 1

\2 Individual STROBE pulses shall be complimentary to the $\overline{\text{STROBE}}$ pulses shown in Figure 1 and occurring at T periods indicated.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

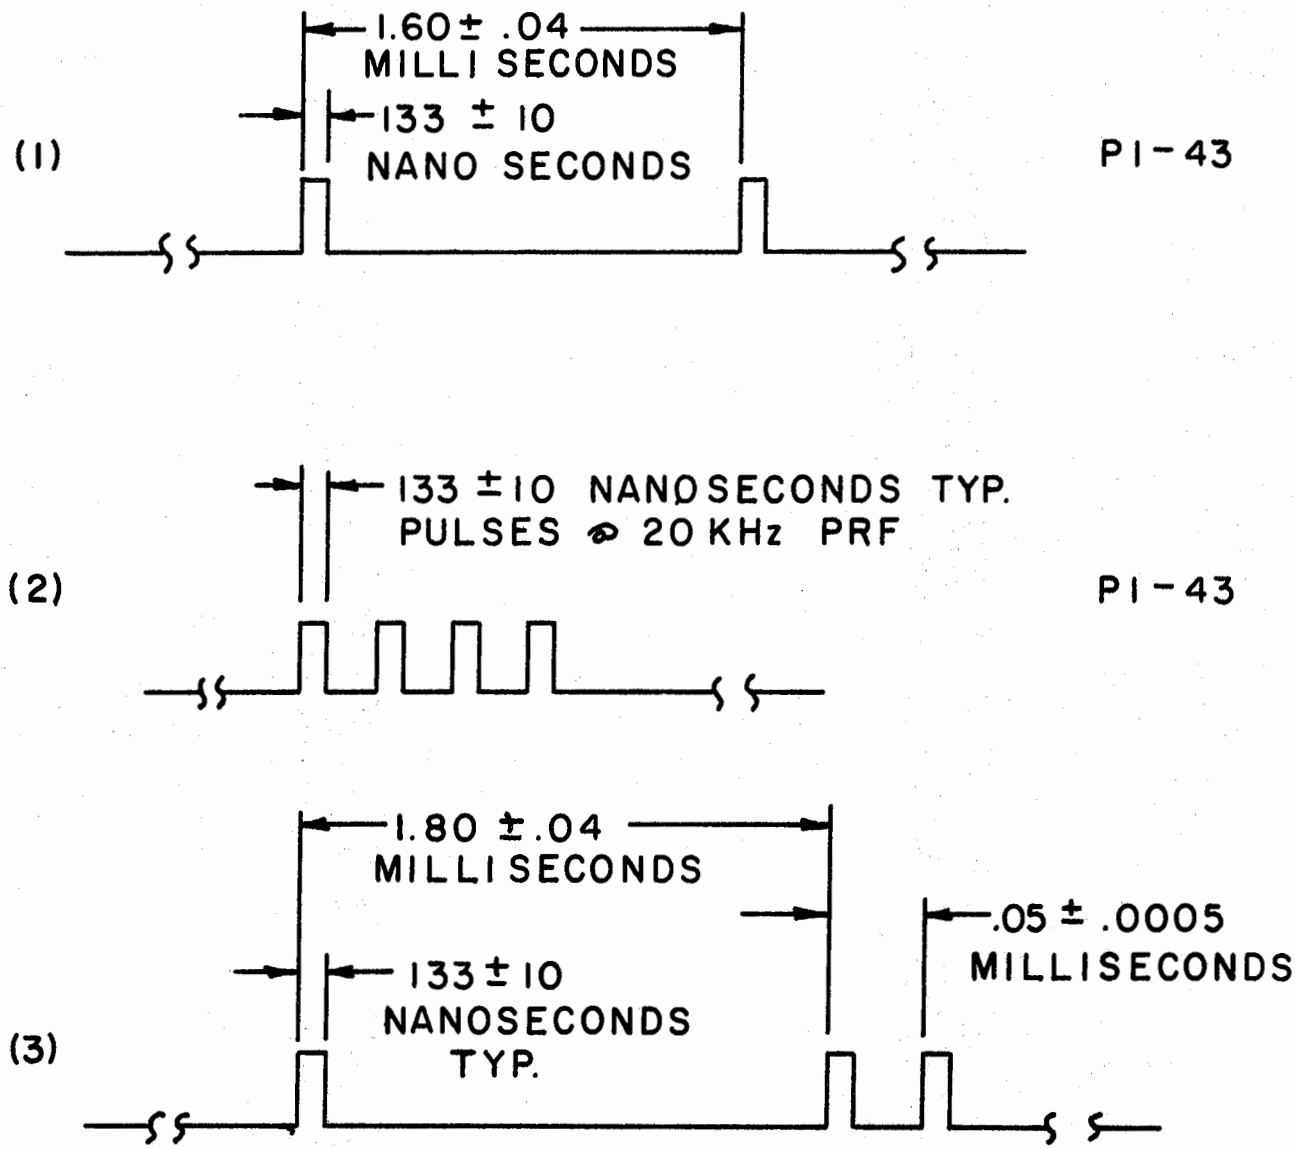

FIGURE 1A △R OUTPUT SIGNALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.