MILITARY SPECIFICATION

Circuit Card Assembly: 10548119
(DECODER, RCFD)

This Amendment forms a part of Military Specification MIL-C-50652/3(MU) dated 15 April 1971.

Page 3

Table I - Input Terminals, Change: From: "55" To: "1"

Table I - Output Signal Characteristics, Pin 14, Steps 3 and 4, Change: From: "Logic" To: "Logic 1"

Paragraph 3.5.4, 2nd Line, Change: From: "P1-42, 48" To: "P1-42, 46"

Paragraph 3.5.5.2 - Delete and Substitute:

3.5.5.2 E/L Delay Differential. With signals T1 and T3 as shown in Figure 1 being alternately applied to P1-11 and 41 (T1 to P1-11 and T3 to P1-41; then T1 to P1-41 and T3 to P1-11) and a logic 1 level applied to P1-55 the output signal at P1-19 shall be T1 and T3 as shown in Figure 1. As the input signals are alternately applied the delay differential of the output signal (The leading edge of each alternative T1 pulse) shall not show a delay differential of greater than 1.0 nanosecond (NS).

Page 4

Figure 1. Third and Fourth Waveshape, signal name column, Change:
From: "T1, T3" To: "$\overline{T1}$, $\overline{T3}$"

Page 7

Figure 2. Test Fixture Setup, Change: From: "Z1 Output J" To: "Z1 Output K"

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:31Z
Check the source to verify that this is the current version before use.

Page 7

J1-22, Change: From: "$-R_S$" To: "$-\dot{R}_S$"

J1-18, Change: From: "$+\dot{R}$ UP" To: "$+\dot{R}_O$"

J1-14, Change: From: "ECM $\dot{R}$ < $\pm$ 5ms" To: "ECM $\dot{R}$ < $\pm$5m/s"


J1-55, Change: From: "$\overline{200M}$" To: "$\dot{2}00M$"


Test Point (TP) at 18.75M, Change:

From: "TP19" To: "TP20"

S2 Wiring, add wire between T3 and S2-2, Change TP callout at S2, See Below:

From: To:

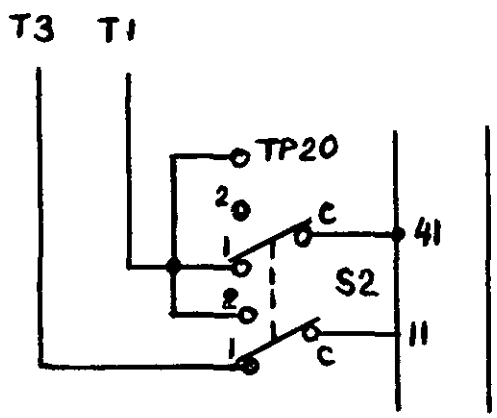

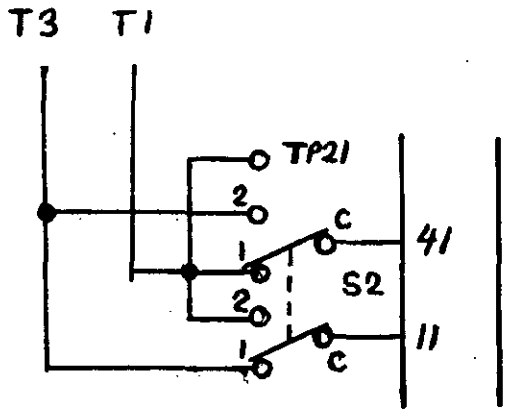

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:31Z
Check the source to verify that this is the current version before use.

Page 8

Table III, - Test Fixture Parts List, Designation Change:

From: "TP1 Thru TP20" To: "TP1 Thru TP21"

Page 9

Paragraph 4.6.3.4, Second Line, Change:

From: "TP19" To: "TP20"

Paragraph 4.6.3.5.2, Line 1, Change:

From: "Apply signal T1 as specified in ------"

To: "Apply signal T1 and T3 as specified in ------"

Page 10

FIGURE 3. RCFD DECODER TEST SETUP, Test Fixture Item 6*, Change: From: "TP20" To: "TP21"

Custodian:

Army - AR

Preparing Activity:

Army - AR

Project No. 1285-A496

* U. S. GOVERNMENT PRINTING OFFICE: 1979—603-022/3871

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:31Z
Check the source to verify that this is the current version before use.