| INCH-POUND |

MIL-C-28580C(YD)
18 March 1991
SUPERSEDING
MIL-C-28580B(YD)
24 October 1984

MILITARY SPECIFICATION

CABINET, STORAGE; WARDROBE, THREE DRAWER

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers one type and size three drawer storage cabinet to be used with wardrobes.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards, form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

|Beneficial comments (recommendations, additions, deletions) and any pertinent|
|data which may be of use in improving this document should be addressed to: |
|Commanding Officer (Code 156), Naval Construction Battalion Center, Port |
|Hueneme, CA 93043-5000, by using the self-addressed Standardization |
|Document Improvement Proposal (DD Form 1426) appearing at the end of this |
|document or by letter. |

AMSC N/A FSC 7105

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

NN-D-570 - Dowels, Wood.
QQ-A-200/9 - Aluminum Alloy 6063, Bar, Rod, Shapes, Tube and Wire, Extruded.
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-529 - Enamel, Alkyd, Semigloss.
TT-L-57 - Lacquer, Rubbing, Clear, (for Wood Furniture).
TT-P-636 - Primer Coating, Alkyd, Wood and Ferrous Metal.
TT-S-190 - Sealers, Sanding, Lacquer-Type (for Wood Furniture).
MMM-A-188 - Adhesive; Urea-Resin-Type (Liquid and Powder).

MILITARY

MIL-P-116 - Preservation, Methods of.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-2073-1A - DOD Materiel Procedures for Development and Application of Packaging Requirements.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

NATIONAL BUREAU OF STANDARDS (NBS)

NBS PS51 - Hardwood and Decorative Plywood.
NBS PS58 - Basic Hardboard.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402).

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 202610-20T13:17Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents which are current on the date of the solicitation (see 6.2).

ASTM

ASTM A 366 - Steel Sheet, Carbon, Cold-Rolled, Commercial Quality, Specification for.
ASTM B 650 - Standard Specification for Electrodeposited Engineering Chromium Coatings on Ferrous Substrates.
ASTM B 689 - Standard Specification for Electroplated Engineering Nickel Coatings.
ASTM D 1037 - Standard Methods of Evaluating the Properties of Wood-base Fiber and Particle Panel Materials.
ASTM D 3951 - Standard Practice for Commercial Packaging.
ASTM E 380 - Standard for Metric Practice.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA - LD 3 - High-Pressure Decorative Laminates.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street, N.W., Washington, DC 20037).

THE ALUMINUM ASSOCIATION (AA)

Designation System for Aluminum Finishes.

(Application for copies should be addressed to The Aluminum Association, 420 Lexington Ave., New York, NY 10017).

TIRE AND RIM ASSOCIATION, INC. (TRA)

TRA Yearbook.

(Application for copies should be addressed to the Tire and Rim Association, Inc., 3200 West Market Street, Suite 304, Akron, OH 44313.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish a storage cabinet for first article inspection and approval (see 4.2.1 and 6.4).

3.2 Standard commercial product. The storage cabinet shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the storage cabinet being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 Design. Each cabinet shall consist essentially of three drawers, two sides, back, top, and necessary framework. The top shall be particleboard or plywood surfaced on both sides with laminated plastic sheets. The drawer fronts shall be particleboard or plywood. The cabinet sides shall be particleboard, plywood or steel. The frame members, drawer sides, and back shall be wood or steel. The drawer bottoms shall be wood, hardboard, or steel. When wood frame design is used, the inner drawer front shall be solid wood as shown on figure 4. The storage cabinet overall dimensions shall be as shown on figure 1.

3.3.1 System of measurement. The dimensions used in this specification are not intended to preclude the use of the metric system of measurement in the fabrication and production of the material, individual parts, and the finished product, provided form, fit, and function requirements are satisfied.

3.3.1.1 Measurement systems. Unless otherwise specified, either the U.S. Customary System of Units (US) or the International System of Units (SI) shall be used in the design and construction of the cabinets. When only one system of measurement is acceptable, the particular system required shall be as specified (see 6.2). In this specification, all measurements, dimensions, sizes and capacities are given in US units. These measurements may be converted to SI units through the use of the conversion factors and methods specified in ASTM E 380.

3.4 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

3.5 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.5.1 Solid wood. For drawer inner front, sides, and back, solid maple, birch, oak, sycamore, or pecan shall be used. For interior frame members, any hardwood species shall be used. Solid wood shall be air- or kiln-dried to a moisture content of 6 to 8 percent. Finished wood component defects, such as honeycombing, splits, and any other defect that may affect structural strength, serviceability, and appearance, are not acceptable. Sound tight knots, not over 1/2 inch average diameter on unexposed parts are acceptable, provided they are not grouped. Sound tight knots, not over 1/4 inch average diameter on solid wood drawer body parts are acceptable, provided they are not grouped.

3.5.2 Plywood. For drawer front, case top and sides, use five-ply minimum and for drawer bottom and cabinet back, use three-ply minimum. All plywood shall be not less than type II with face and back veneers not less than Sound Grade (2) and of any species in the medium or low density group as specified in NBS PS51. Table I specifies plywood thickness for various components.

TABLE I. Cabinet components - minimum thickness.

Part	Particle-board (inch)	Plywood (inch)	Solid wood (inch)	Hardboard (inch)	Steel (gauge)
CASE					
Top	3/4	3/4	-	-	-
Sides	3/4	3/4	-	-	20
Back	-	1/4	-	1/4	20
Base	-	-	1-1/2x1-1/2	-	-
Drawer Bearer Frame	-	-	3/4x1-1/2	-	-
Drawer Side Suspension	-	-	-	-	14
Vertical Stiffeners	-	-	-	-	20
Cross Rails	-	-	-	-	18
DRAWER					
Front	5/8	3/4*	-	-	-
Inner Front	-	-	7/16	-	-
Sides	-	-	7/16	-	20
Back	-	-	7/16	-	20
Bottom	-	1/4	-	1/4	20

*Thickness when inner front not used.

3.5.3 Particleboard. Particleboard shall weigh at least 42 pounds per cubic foot, at 6 to 9 percent moisture content. The particleboard panels may be single ply homogeneous wood flake, three-layer wood flake, or three-layer with graded medium size wood chip center and wood flake faces. All chips and flakes shall be resin coated, impregnated and bonded together under heat and pressure by the flat-platen method of pressing. Particleboard panels shall be dimensionally stable and free from appreciable warpage which may adversely

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

affect appearance or serviceability. Panel faces shall be flat and smooth to eliminate "telegraphing" of defects through plastic laminate surface material. The particleboard shall have the following physical properties determined in accordance with ASTM D 1037.

Modulus of Elasticity	-	425,000 pound-force per square inch (psi) minimum (min)
Modulus of Rupture	-	2,700 psi (min)
Internal Bond	-	80 psi (min)
Swelling (thickness)	-	10 percent maximum
Screw Holding (Face)	-	280 pounds (min)
Screw Holding (Edge)	-	235 pounds (min)

On particleboard to be used as sides, the exposed side shall be filled and sanded to produce a smooth paintable surface. A filler material fully compatible with the coating system shall be used (see 3.10.1).

3.5.4 Hardboard. Hardboard for cabinet backs and drawer bottoms shall be class 1 tempered, surface S2S in accordance with NBS PS58.

3.5.5 Steel. Steel shall conform to ASTM A 366. Sheets of 16 gage and lighter shall have stretcher-leveled standard of flatness.

3.5.6 Aluminum. Aluminum used in the fabrication of side angles, drawer pulls, and alloy extrusions shall conform to temper T-5 of QQ-A-200/9.

3.5.7 Laminated plastic sheets.

3.5.7.1 Decorative laminated plastic sheets. Decorative laminated plastic sheets shall be 0.032-inch thick and in accordance with NEMA LD 3. Pattern, color, and finish shall be as specified (see 6.2).

3.5.7.2 Nondecorative laminated plastic sheets. Nondecorative laminated plastic sheets shall be 0.030-inch thick and in accordance with NEMA LD 3.

3.5.8 Drawer guides.

3.5.8.1 Center guide. For wood drawer bodies, the center guide shall be an all-metal type with an inner and outer track which operates on two sets of ball bearings as shown on figures 2 and 4.

3.5.8.2 Side suspension. For steel drawer bodies, the side suspension shall be an outer and inner channel of 14-gauge steel with plastic guide on each side of the drawer. The center section of the outer channel at the rear shall be clipped and bent forward providing a tab-type stop and the bottom section shall be punched and a two-prong insert-type plastic guide shall be inserted. The inner channel shall be provided with an integral drawer stop and a plastic guide at the rear with a rubber bumper as shown on figures 5 and 6.

3.5.9 Plastic edge molding. Plastic edge molding shall be tee-style extruded ethyl cellulose, polypropylene, or cellulose acetate butyrate with

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

barbed tongue formed to hold securely in the slot of the side edge. The molding shall be provided with a convex face which is smooth, without grooves or other detailing. A color shall be provided to match the exterior color of the sides.

3.6 General construction. At manufacturer's option, the cabinets shall be wood or steel except tops shall be made of particleboard or plywood and drawer fronts of particleboard and solid wood, or plywood only. The option selected shall be used for all components on the same purchase order or contract. Cabinets shall be constructed as specified herein and as shown on figures 1 through 6. Materials shall be as specified in 3.3, 3.5 through 3.5.9 and hereinafter, and of thicknesses specified in Table I. All dimensions, sizes, and thicknesses of materials shown in referenced figures and specified herein are minimum, unless otherwise specified. The cabinets shall have the capability of being anchored to the wardrobe bottom by metal brackets or through the bottom flange as shown on figure 2. Cabinet components shall be fastened to particleboard with sheet metal screws. Wood screws are not acceptable for this purpose. Components shall be bonded in accordance with 3.7 and fasten steel-to-steel by spotwelding as specified in 3.12.2. Squared drawer fronts shall be provided with equal vertical spacing of not more than 1/8 inch between the cabinet sides and drawer sides and equal horizontal spacing between the drawers as shown on figures 4 and 6.

3.6.1 Cabinet assembly - wood.

3.6.1.1 Drawer bearer frames. The four solid hardwood drawer bearer frames shall be assembled by mortise and tennon construction or by double-doweling and gluing. The dowels shall be in accordance with type II of NN-D-570. To preclude exposed joints, the bearer frame front and back members shall be made of full length pieces. The top bearer frame and the two intermediate bearer frames shall be secured to the cabinet sides with aluminum angles and sheet metal screws as shown on figures 3 and 4. Each of the two intermediate bearer frames shall be further secured with three sheet metal screws, at the sides, angled and located as shown on figure 3. The bottom bearer frame shall be rested on the base and fastened thereto with a minimum of two sheet metal screws at each side as shown on figures 2 and 4. As an alternate assembly method, the drawer bearer frames may be routed into the sides as shown on figure 3, securely and permanently glued and further secured with angled sheet metal screws as specified above.

3.6.1.2 Base. The base shall be made of solid hardwood with the front and back members full length pieces. The front and back shall be inset as shown on figures 2 and 4. The base shall be secured with the use of screwed and glued corner blocks or double-doweled and glued corners as shown on figure 4.

3.6.1.3 Sides. The particleboard or plywood sides shall be extended to the full height of the cabinet, less the top thickness. The front edge of the sides shall be extended to the floor as shown on figure 1 or inset to the toe-space depth as shown on figure 2. The front vertical edge of each side shall be covered with a tee-style plastic edge molding as specified in 3.8. The bottom of the back at each side shall be notched out as shown on figure 4 to match the inset of the base at the back. The inset at the back is to permit the cabinet

Source: https://assist.dla.mil Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

to pass over a wardrobe metal frame member. The back edge of each side shall be rabbeted to the proper depth and width to receive and secure the back. The back edges of the sides and outside surface of the back shall be flush.

3.6.1.4 Back. The three-ply plywood or hardboard back shall be extended from the cabinet top underside to the bottom of the lower drawer bearer inset at the sides as specified in 3.6.1.3. The back shall be secured by one of the following methods:

a. Sheet metal screws - spaced not more than 8 inches apart.
b. Nails - spaced not more than 6 inches apart.
c. Staples - spaced not more than 3 inches apart.

In addition, one fastener shall be located at each corner and not less than two fasteners at each of the two intermediate drawer bearer frames.

3.6.1.5 Top. A decorative laminated plastic sheet shall be bonded to the top surface of the particleboard or plywood core and a nondecorative laminated plastic sheet to the bottom surface in accordance with 3.7. The four edges of the top shall be self-edged as specified in 3.9. The top shall be overlapped 1/8 inch at the front and sides and the back shall be flush as shown on figures 3 and 4. The top shall be secured to the interior frame member with not less than eight standard-type fasteners or sheet metal screws, two to each frame member.

3.6.1.6 Wood drawers. Each cabinet shall contain three drawers. The minimum drawer dimensions shall be as shown on figures 3 and 4.

3.6.1.6.1 Drawer fronts. Fronts shall be flush with the front edge of the cabinet sides. Drawer fronts are of two types: One type shall be two-piece (with inner and outer front), the inner front shall be solid hardwood, the outer front shall be particleboard. The other type consists of one piece of five-ply plywood. When the particleboard and hardwood drawer front is used, the inner front shall be fastened to the outer front with not less than four sheet metal screws.

3.6.1.6.2 Drawer box with particleboard front. The drawer box sides, back, and front shall be hardwood as specified in 3.5.1. The bottom shall be hardboard or plywood. The exterior side of the front shall be surfaced with decorative laminated plastic sheet.

3.6.1.6.3 Drawer box with plywood front. The drawer box shall be as in 3.6.1.6.2 except the hardwood inner front and particleboard outer front is replaced by a plywood front. The exterior side of the front shall be surfaced with decorative laminated plastic sheet and the unexposed surface with a nondecorative laminated plastic sheet.

3.6.1.6.4 Drawer assembly. For drawers with particleboard outer front, the drawer back, sides, and hardwood inner front shall be assembled with standard dovetail and glue (dovetail not acceptable in particleboard). For drawers with plywood front, the sides shall be assembled to the back by standard

Source: https://assist.dla.mil -- Downloaded: 202610-20T13:17Z
Check the source to verify that this is the current version before use.

dovetail and glue; the sides shall be assembled to the front with a blind miter dovetail and glue. The front, sides, and back shall be milled to receive the hardwood or plywood bottom. The bottom may be nailed to the back. Further, the drawer bottom shall be secured to the sides and front with 2-inch long glue blocks, two blocks at each side and two at the front.

3.6.1.6.5 Drawer pulls. Drawer pulls shall be fabricated from aluminum or steel. The drawer pulls shall be formed as shown on figure 4 and extend to the full width of the drawer as shown on figure 1. The ends of the drawer pulls shall be rounded as shown on figure 1 to avoid sharp corners. Aluminum pulls shall be anodized as specified in 3.10.5. Steel pulls shall be plated as specified in 3.10.6. The pull shall be fastened to the rear of the drawer front with not less than three equally spaced sheet metal screws.

3.6.1.6.6 Drawer alignment. Two drawer stops shall be secured, one at each side of the drawer, to the drawer bearer frame back member to keep the drawer front in alignment and to prevent marring the finish on the front of the drawer bearer frame member. Space between drawer fronts and cabinet sides shall be in accordance with 3.6. The drawers shall be constructed to operate smoothly on an all-steel center guide and two side glides. The inner guide member shall be let into the drawer inner front and screwed to the drawer back in accordance with the manufacturer's instructions. The 1/2-inch diameter nickel-plated steel tack-type side glides or self-lubricating plastic glides shall be located as shown on figure 3. The drawers shall be sealed and finished as specified in 3.10.2.

3.6.1.7 Brackets. Two brackets of aluminum or steel shall be provided for securing the base to the wardrobe bottom. The brackets shall be located and secured, one on each side, with two screws as shown on figure 2. Four additional screws shall be provided for securing the brackets to the wardrobe bottom. Steel brackets shall be treated for corrosion resistance.

3.6.2 Cabinet assembly - steel. The sides and back shall be fabricated of one piece with both the back of the sides and the back inset 1-inch deep by 1-1/2-inches high at the bottom. As an alternative, the inset may be formed and flanged and the component spotwelded to flanges of the sides and back. The top and bottom of the sides and back shall be flanged not less than 1-inch wide. The corners shall be overlapped and spotwelded to form rigid and stable corners. The front of the sides shall be joined at the top and bottom by cross rails formed as shown on figure 2. The sides shall be reinforced vertically at the front and back with stiffeners as shown on figure 2. The drawer suspension system outer channels shall be spotwelded to the front and back stiffeners on each side, properly aligned with the matching inner channels fastened to the drawer sides to provide the horizontal and vertical clearances specified in 3.6. The top shall be constructed as specified in 3.6.1.5 and secured with not less than eight sheet metal screws through holes punched in the top flanges. Four sheet metal screws shall be provided for fastening the cabinet to the wardrobe bottom through holes punched in the bottom side flanges as shown on figure 1.

Source: https://assist.dla.mil -- Downloaded: 202610-20T13:17Z
Check the source to verify that this is the current version before use.

3.6.2.1 Steel drawers. Each cabinet having steel sides and back shall be provided with three equal size drawers as shown on figure 6. The drawer body shall be made of steel and drawer fronts and pulls as specified in 3.6.1.6.1 and 3.6.1.6.5. The drawer body shall be made of pieced sheets, flanged and spotwelded or the sides and bottom shall be formed of one continuous piece. The top edge of the drawer sides and back shall be hemmed. The front of the sides and bottom shall be flanged and punched for fastening to the drawer front with sheet metal screws. A minimum of three screws shall be used across the bottom, with one centered, and two screws on each side. The drawer suspension system inner channels shall be welded to the drawer sides located to match the outer channels. A maximum 1/8-inch tolerance between the drawer suspension system inner and outer channels is acceptable. The drawer body finish shall be applied as specified in 3.10. Unless otherwise specified (see 6.2), drawer body color shall be the same as the sides and back. The drawers shall be made to operate smoothly and efficiently without binding or catching.

3.7 Bonding. Adhesive shall be applied to joining surfaces in an adequate and uniform manner as recommended by the adhesive manufacturer. The materials shall be clamped and pressed in accordance with the adhesive manufacturer's instructions. Laminated plastic sheets shall be bonded to plywood or particleboard with a urea-resin type adhesive conforming to MMM-A-188.

3.8 Installation of the plastic edge molding. The front vertical edges of the sides shall be covered with a tee-style molding having a plus tolerance of zero and a minus tolerance of 1/64 inch. Each length of molding required shall be of one piece (splicing is not permitted). The molding shall be tight and secure, without gaps or crevices. The molding ends shall be secured with brads. The brads shall be driven from the interior surface of the side. The brads shall be set and the holes created by the driven brads shall be filled. The filler shall be matched to the particleboard surface color.

3.9 Plastic self-edging. The self-edging shall match the top and drawer fronts in color and thickness. The edges shall be beveled to avoid sharpness; however, gaps between the two adjoining plastic edges are not permitted.

3.10 Finishes.

3.10.1 Exposed wood parts. The exterior surfaces of the sides, front edge of the frame members, and the base front edge shall be filled and sanded. Two-coats of a one-component, air-drying, oil-modified, pigmented polyurethane resin coating of the color specified shall be applied (see 6.2). The coating shall have a gloss range of 45 to 65 when measured with a 60 degree glossmeter. The coating shall be applied in accordance with the manufacturer's instructions.

3.10.2 Unexposed wood parts. Unexposed wood parts shall be sealed with a sealer conforming to TT-S-190, sanded, wiped clean, and finished with a coat of lacquer conforming to type I or II of TT-L-57. Alternatively, all drawer surfaces, except fronts, may be coated by spraying or dipping into a drawer sealant. The drawer sealant shall be made of a solution of wax and resins with not less than 30 percent nonvolatile matter of which not less than 7 percent is wax. A nongrain-raising sealant shall be used which is substantially colorless and after drying, substantially odorless and nonstaining. Excess sealant shall be drained off. In addition, the drawers running surfaces shall be coated with paraffin to insure ease of operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

3.10.3 Steel coatings and finish. All cabinet components fabricated from steel shall be treated, coated, and finished as specified below:

3.10.3.1 Surface preparation. Steel components shall be treated in accordance with type I or type II of TT-C-490 when the finish coat is in accordance with 3.10.3.3.1. When the finish coat is in accordance with 3.10.3.3.2, preparation and treatment shall be as prescribed by the manufacturer of the epoxy powder.

3.10.3.2 Primer coatings. All treated components that are to be finish coated in accordance with 3.10.3.3.1 shall be given one coat of primer conforming to TT-P-636, applied to a minimum dry-film thickness of 0.7 mil. The primer shall be baked for not less than 45 minutes at a temperature of 250 degrees Fahrenheit (deg F) or an equivalent baking period as recommended by the paint manufacturer.

3.10.3.3 Finish coat. Unless specified by the contracting officer (see 6.2), all treated steel surfaces shall be finished in accordance with 3.10.3.3.1 or 3.10.3.3.2. Paint color shall be as specified (see 6.2).

3.10.3.3.1 Semi-gloss enamel finish. When the semi-gloss enamel finish is to be applied, all primed surfaces shall be finished with a coat of semi-gloss enamel conforming to class B of TT-E-529. The enamel shall be baked for not less than 45 minutes at 250 deg F or an equivalent baking period as recommended by the paint manufacturer.

3.10.3.3.2 Thermoset dry-epoxy powder finish. When the dry-epoxy powder finish is to be applied, the epoxy powder shall be epoxy-ester or epoxy-polyester with a specific gravity range of 1.5 to 1.8. The epoxy powder shall be applied with electrostatic airless spray equipment. The metal, curing temperature, curing time, and application voltage shall be as prescribed by the manufacturer of the epoxy powder. The dry-film thickness shall be not less than 1.5 mil. The epoxy powder shall be Glidden (Pulvalure Epoxy or epoxy-polyester powder), H.B. Fuller (Kativo Epoxy or epoxy-polyester powder), or other products similar and equal.

3.10.4 Painted finishes. Painted finishes shall be smooth and without dirt, dust, or other foreign matter embedded. The finishes shall not be discolored, rippled, peeled, have sags or runs. Small scratches or areas of marred finish shall be touched up as necessary to match the surrounding finish. Large areas that are scratched or marred, affecting the appearance of the finish, shall be replaced or the entire component refinished.

3.10.5 Aluminum pulls. Aluminum pulls shall be anodized in accordance with AA Designation AA-C22.

3.10.6 Steel pulls. Steel pulls shall be nickel plated in accordance with ASTM B 689 or chromium plated in accordance with ASTM B 650.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

3.11 Identification marking. Identification shall be permanently and legibly marked directly on the back of each cabinet or on a corrosion-resisting metal plate securely attached to the back of each cabinet at the source of manufacturer. Identification shall include the manufacturer's model number, name and trademark to be readily identifiable to the manufacturer.

3.12 Workmanship.

3.12.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

3.12.2 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Spot welds shall be a minimum of 0.016-inch diameter when measured at the fused nugget or 0.8 times the square root of the material thickness, whichever is greater. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T13:17Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one cabinet when a first article is required (see 3.1, 6.2, and 6.4). This inspection shall include the examination of 4.4. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4 and the packaging inspection of 4.5. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. The unit of product shall be one cabinet. All cabinets offered for delivery at one time shall be considered a lot for the purpose of inspection. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for a complete reinspection. Resubmitted lots shall be reinspected using tightened inspection. If the rejected lot was screened, reinspection shall be limited to the defect causing rejection. If the lot was reprocessed, reinspection shall be performed for all defects. Rejected lots shall be separate from new lots, and shall be clearly identified as reinspected lots.

4.4 Examination. Each sample selected shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirement or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.5 Packaging inspection. The preservation, packing, and marking of the item shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. The cabinets shall be preserved in accordance with MIL-P-116, method III. Drawers shall be secured in a closed position. The finished surfaces of the cabinet shall be protected from abrasion with glazed kraft paper, waxed paper, or other suitable nonabrasive cushioning material, and secured in place with tape.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

5.1.2 Level Commercial. Each cabinet shall be preserved in accordance with ASTM D 3951. Preservation requirements shall as a minimum conform to applicable carrier rules and regulations.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A. Each cabinet shall be packed in accordance with MIL-STD-2073-1A. Containers shall be selected from table I for the appropriate level. Only closed containers shall be used. Contents shall be cushioned, blocked, and braced to prevent movement within the shipping container and damage to the cabinet. Case liners are required.

5.2.2 Level B. Same as level A, except case liners are not required.

5.2.3 Level Commercial. Each cabinet shall be packed in accordance with ASTM D 3951. Packing requirements shall as a minimum conform to applicable carrier rules and regulations.

5.3 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The cabinets are for use with wardrobes in enlisted and officer personnel quarters.

6.1.1 Sampling procedures. Recommended Inspection Level is Level II and Acceptable Quality Level is 4.0 percent defective (see 4.3).

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of document required if other than as specified (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.2.1, and 6.4).
e. When system of measurement is to be specified (see 3.3.1.1).
f. Pattern, color, and finish of decorative laminated plastic sheets required. Finish A (Satin) is generally used for solid color plastic laminates; Finish B (Furniture) or Finish D (Textured) are appropriate for woodgrains (see 3.5.7.1).
g. When drawer body color is to be other than the same as the sides and back (see 3.6.2.1).
h. Color for the cabinet sides and front frame members (see 3.10.1 and 3.10.3.3).
i. When type of finish coat is to be specified (see 3.10.3.3).
j. Level of preservation and level of packing required (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

6.3 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-Part 27.475-1 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data should be delivered by the contractor in accordance with the contract or purchase order requirements.

6.4 First production vehicle. When a first production vehicle inspection is required, the vehicle shall be tested and should be a first production vehicle or a standard vehicle from the contractor's current inventory. The contracting officer should include specific instructions in the contract regarding arrangements for examination, test, and approval of the first production vehicle (see 3.1 and 4.2.1).

6.5 Subject term (key word) listing.

cabinet
wood
particleboard
seel
storage

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Navy - YD

Preparing Activity:
Navy - YD

(Project 7105-N262)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

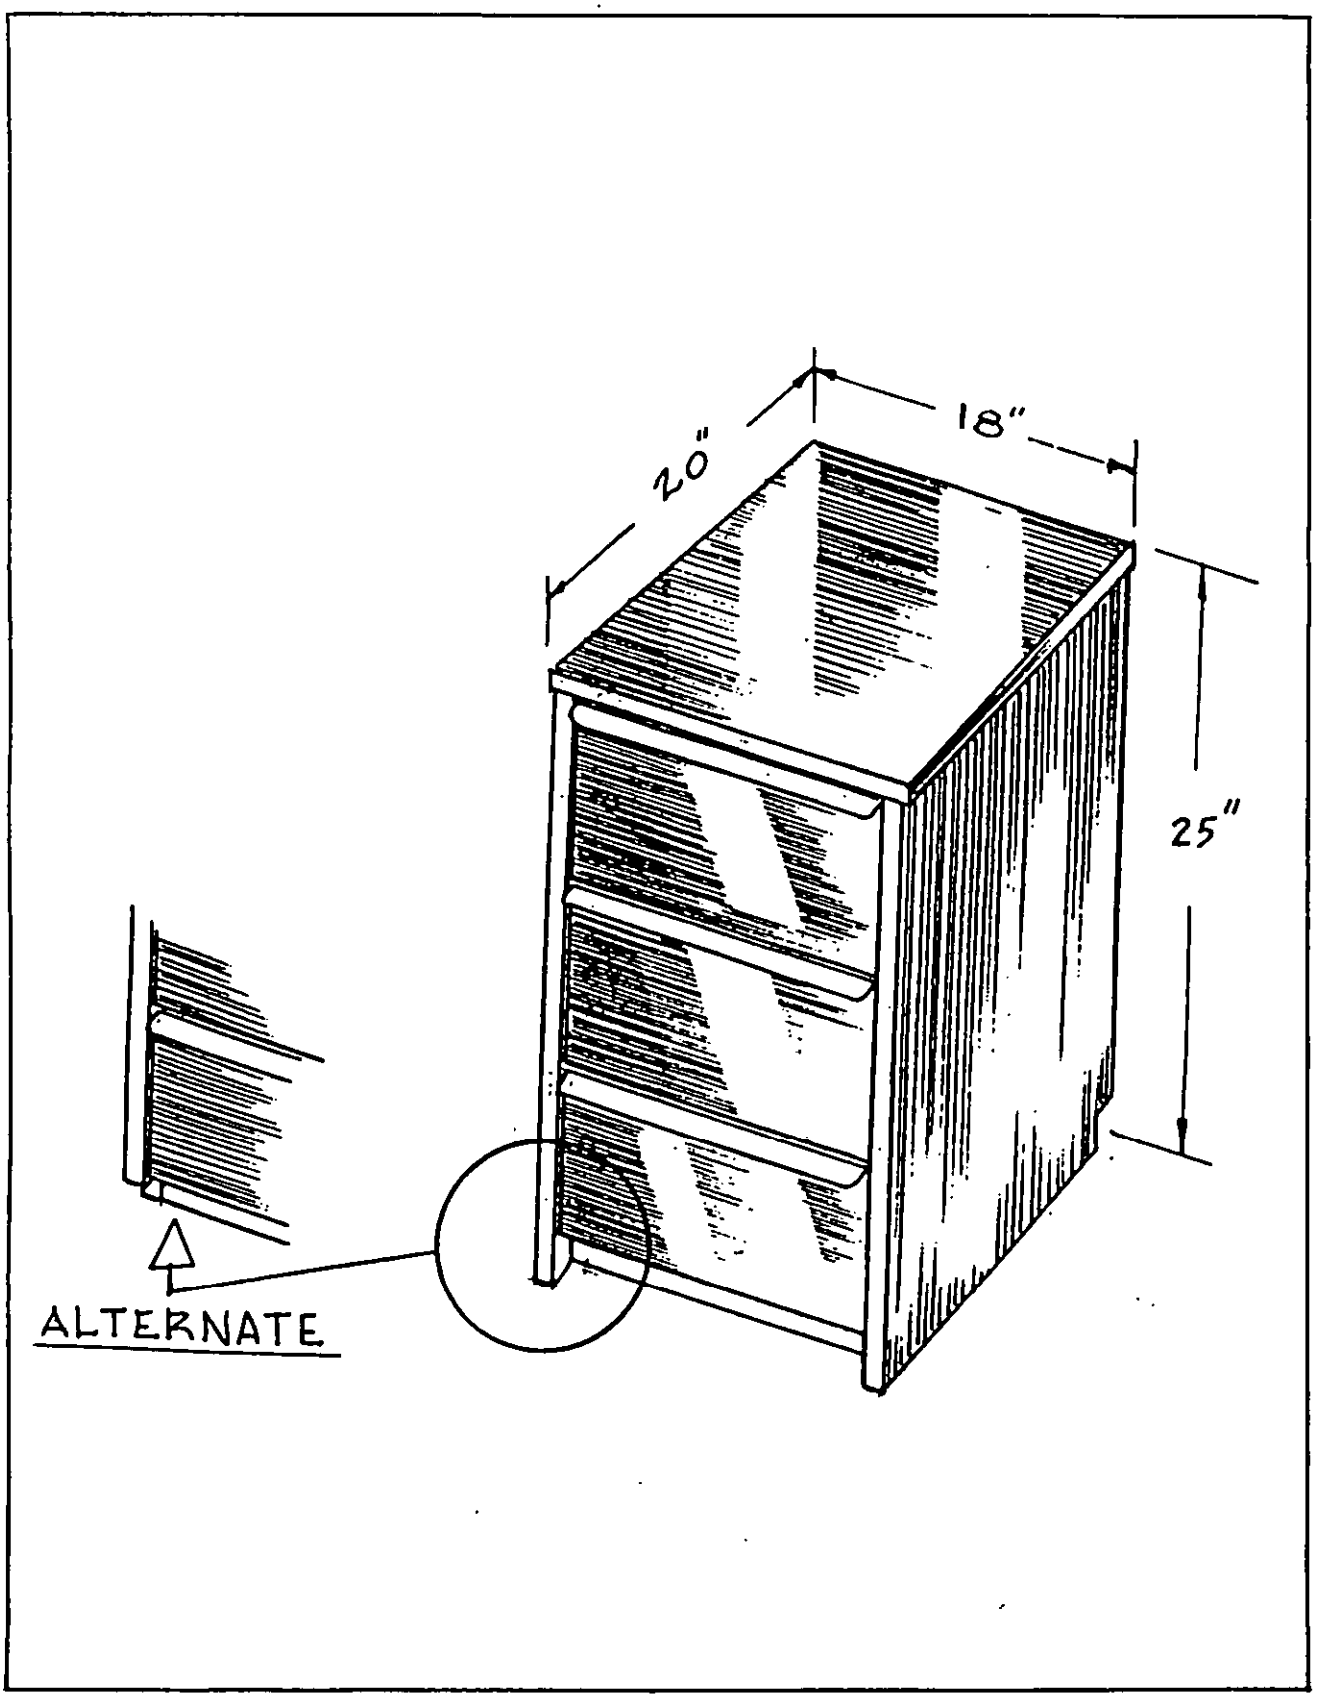


FIGURE 1. Three drawer cabinet.

Source: https://assist.dla.mil Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

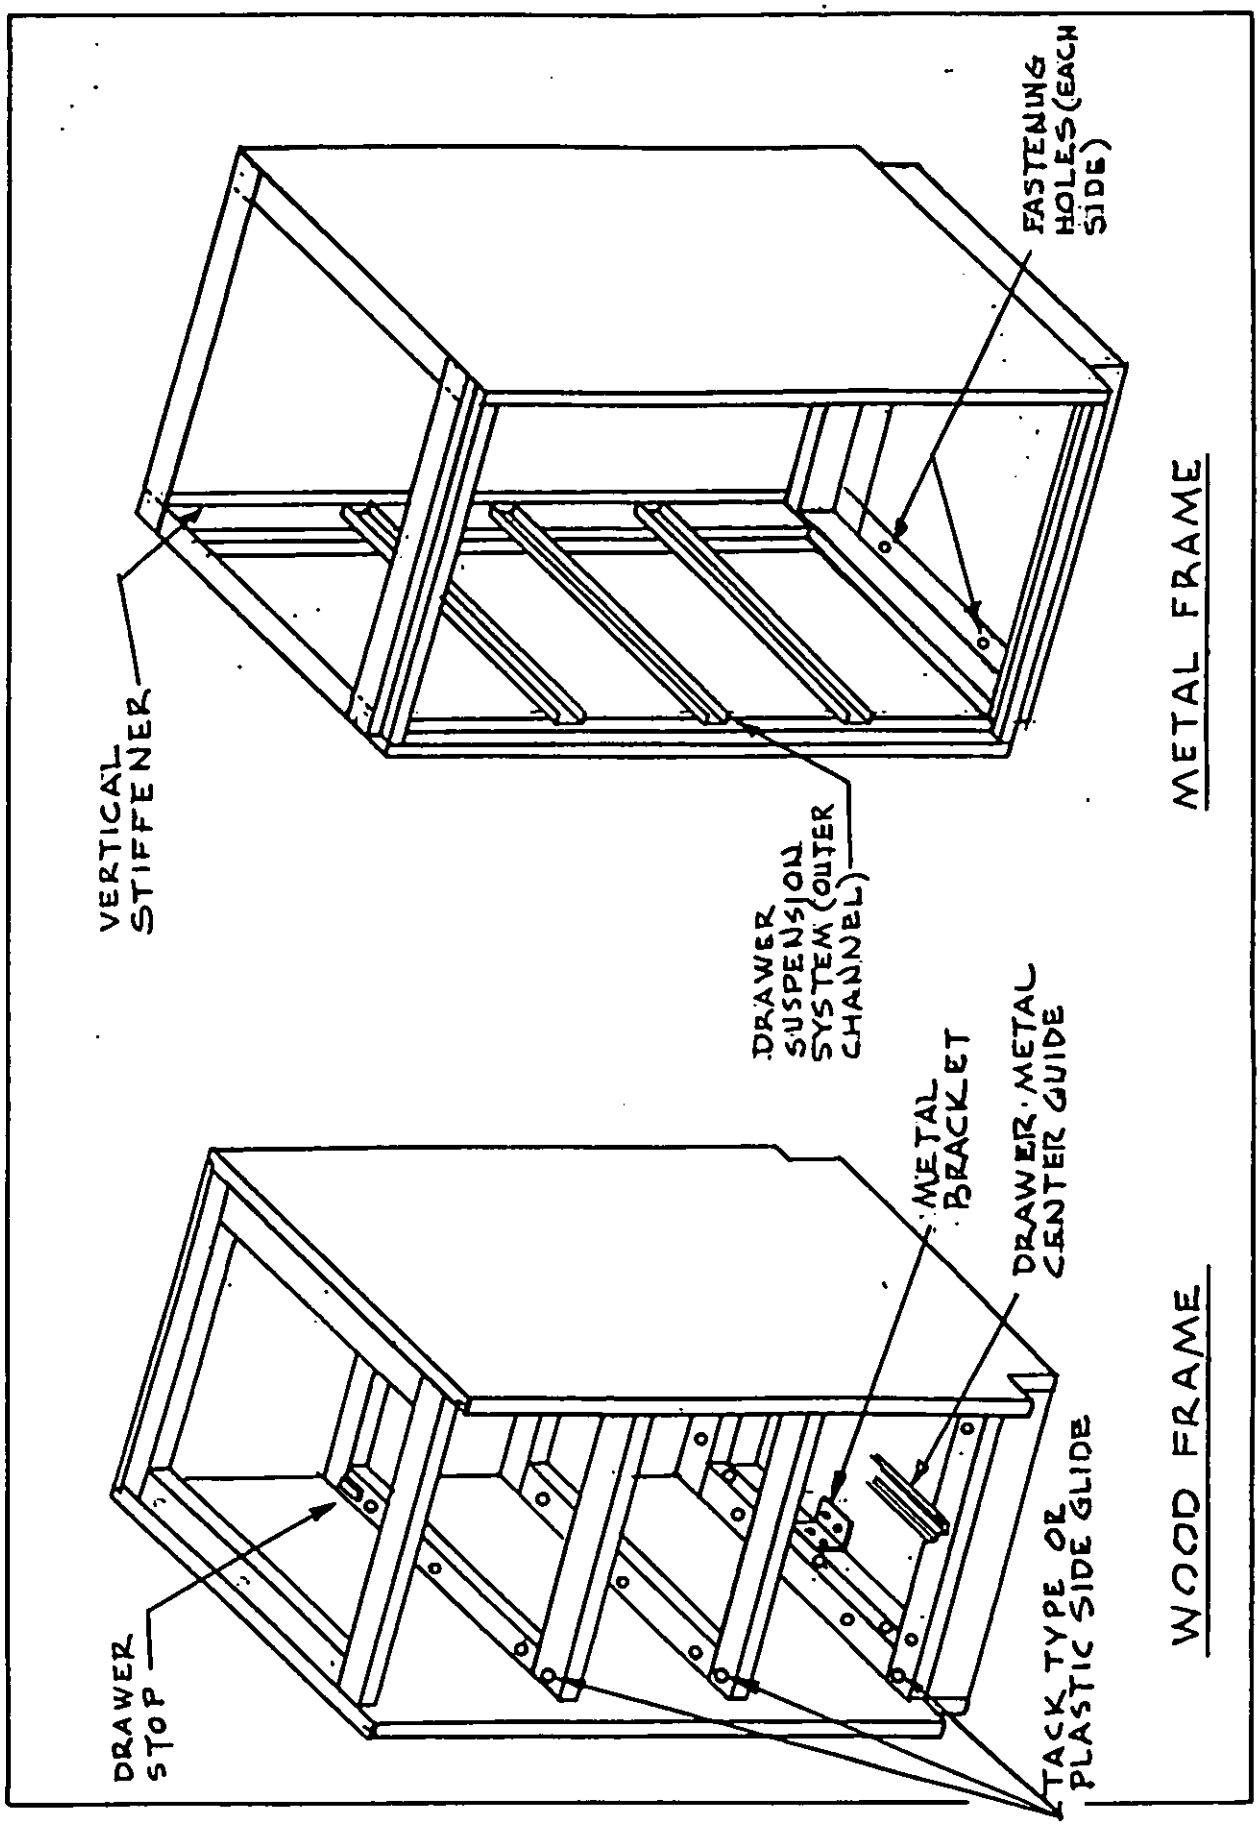


FIGURE 2. Cabinet - isometric views.

Source: https://assist.dla.mil -- Downloaded: 202610-20T13:17Z
Check the source to verify that this is the current version before use.

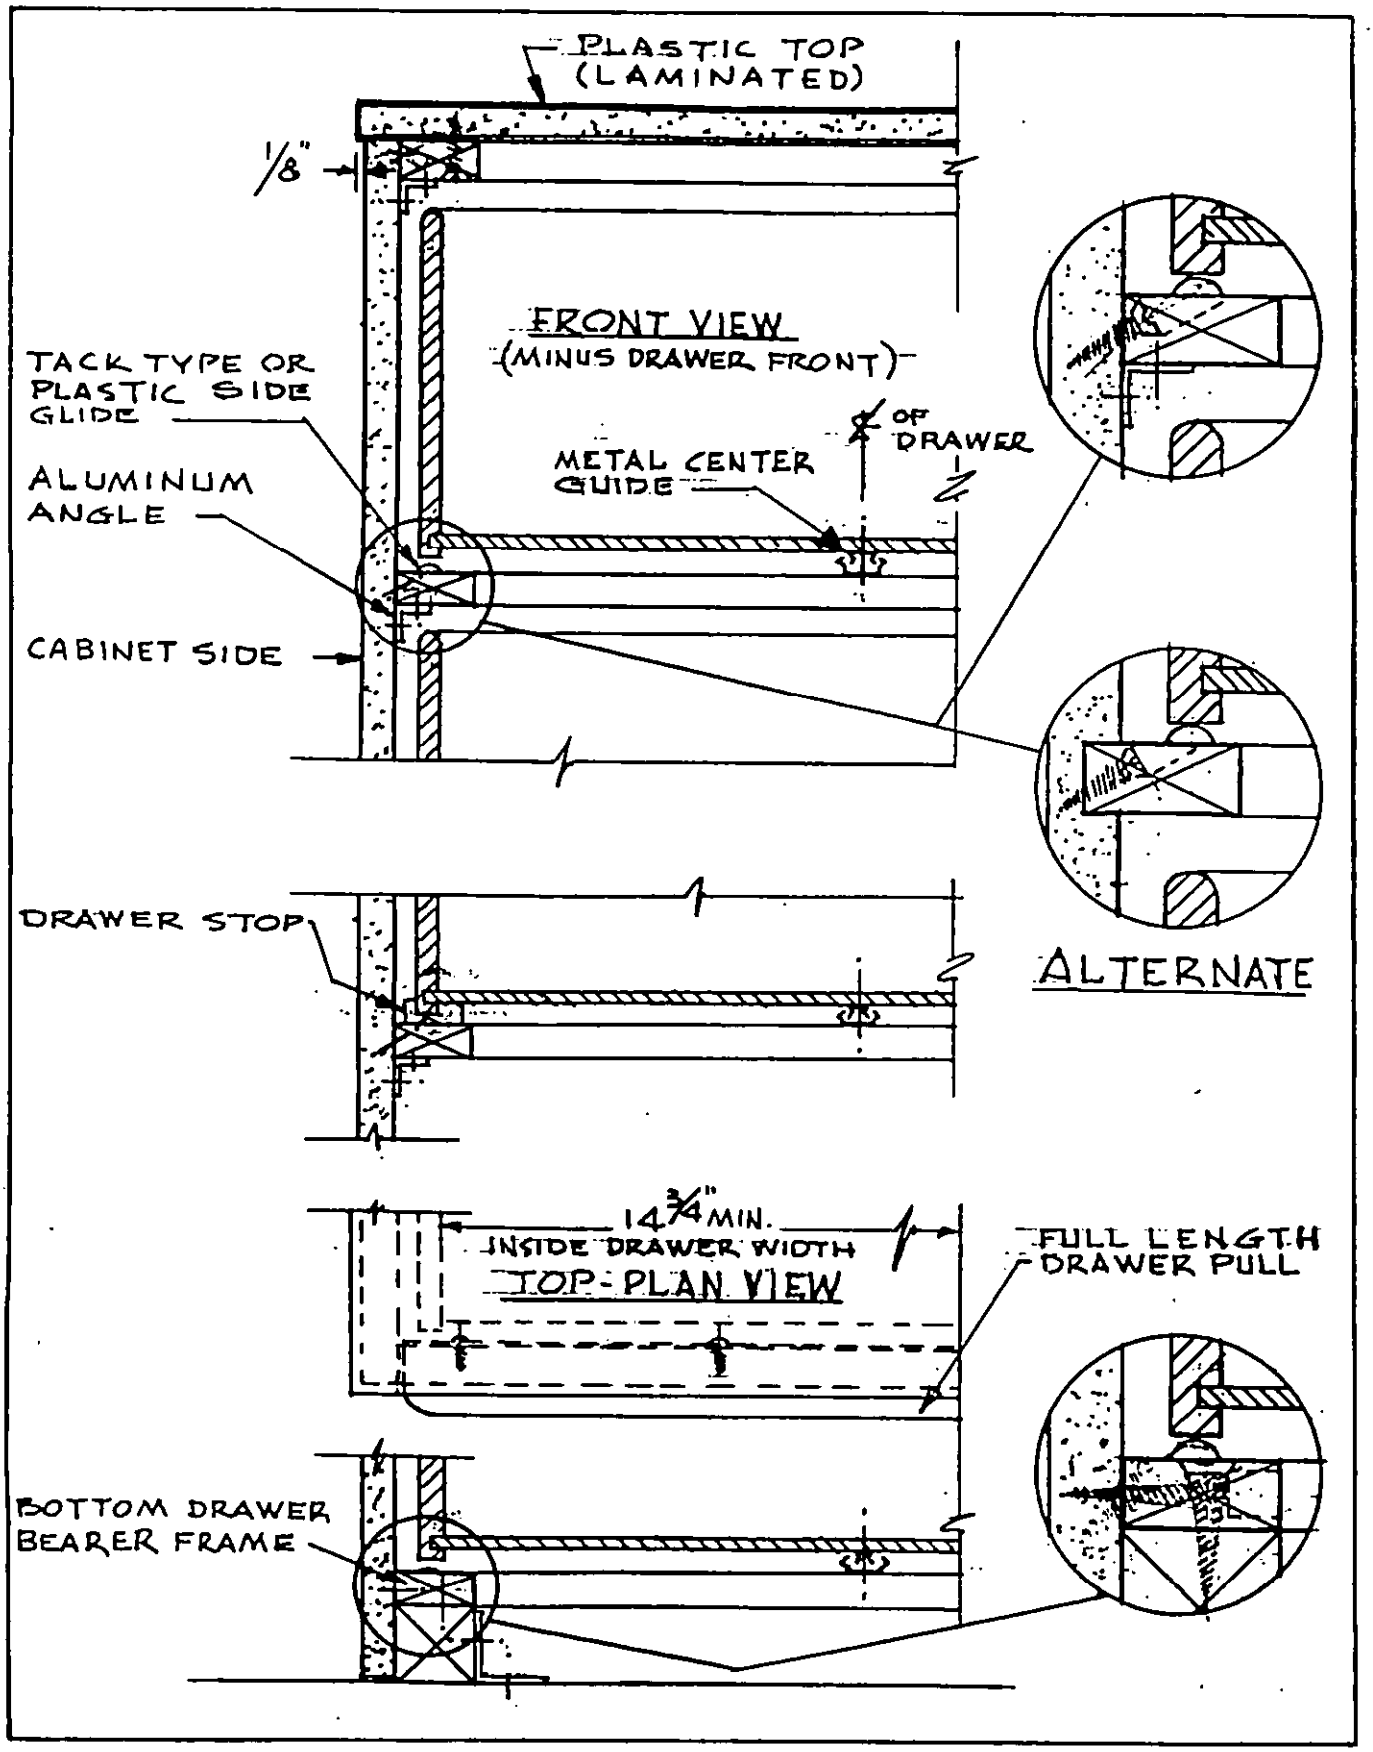


FIGURE 3. Wood-frame cabinet - sectional views.

Source: https://assist.dla.mil -- Downloaded: 20260-20T13:17Z
Check the source to verify that this is the current version before use.

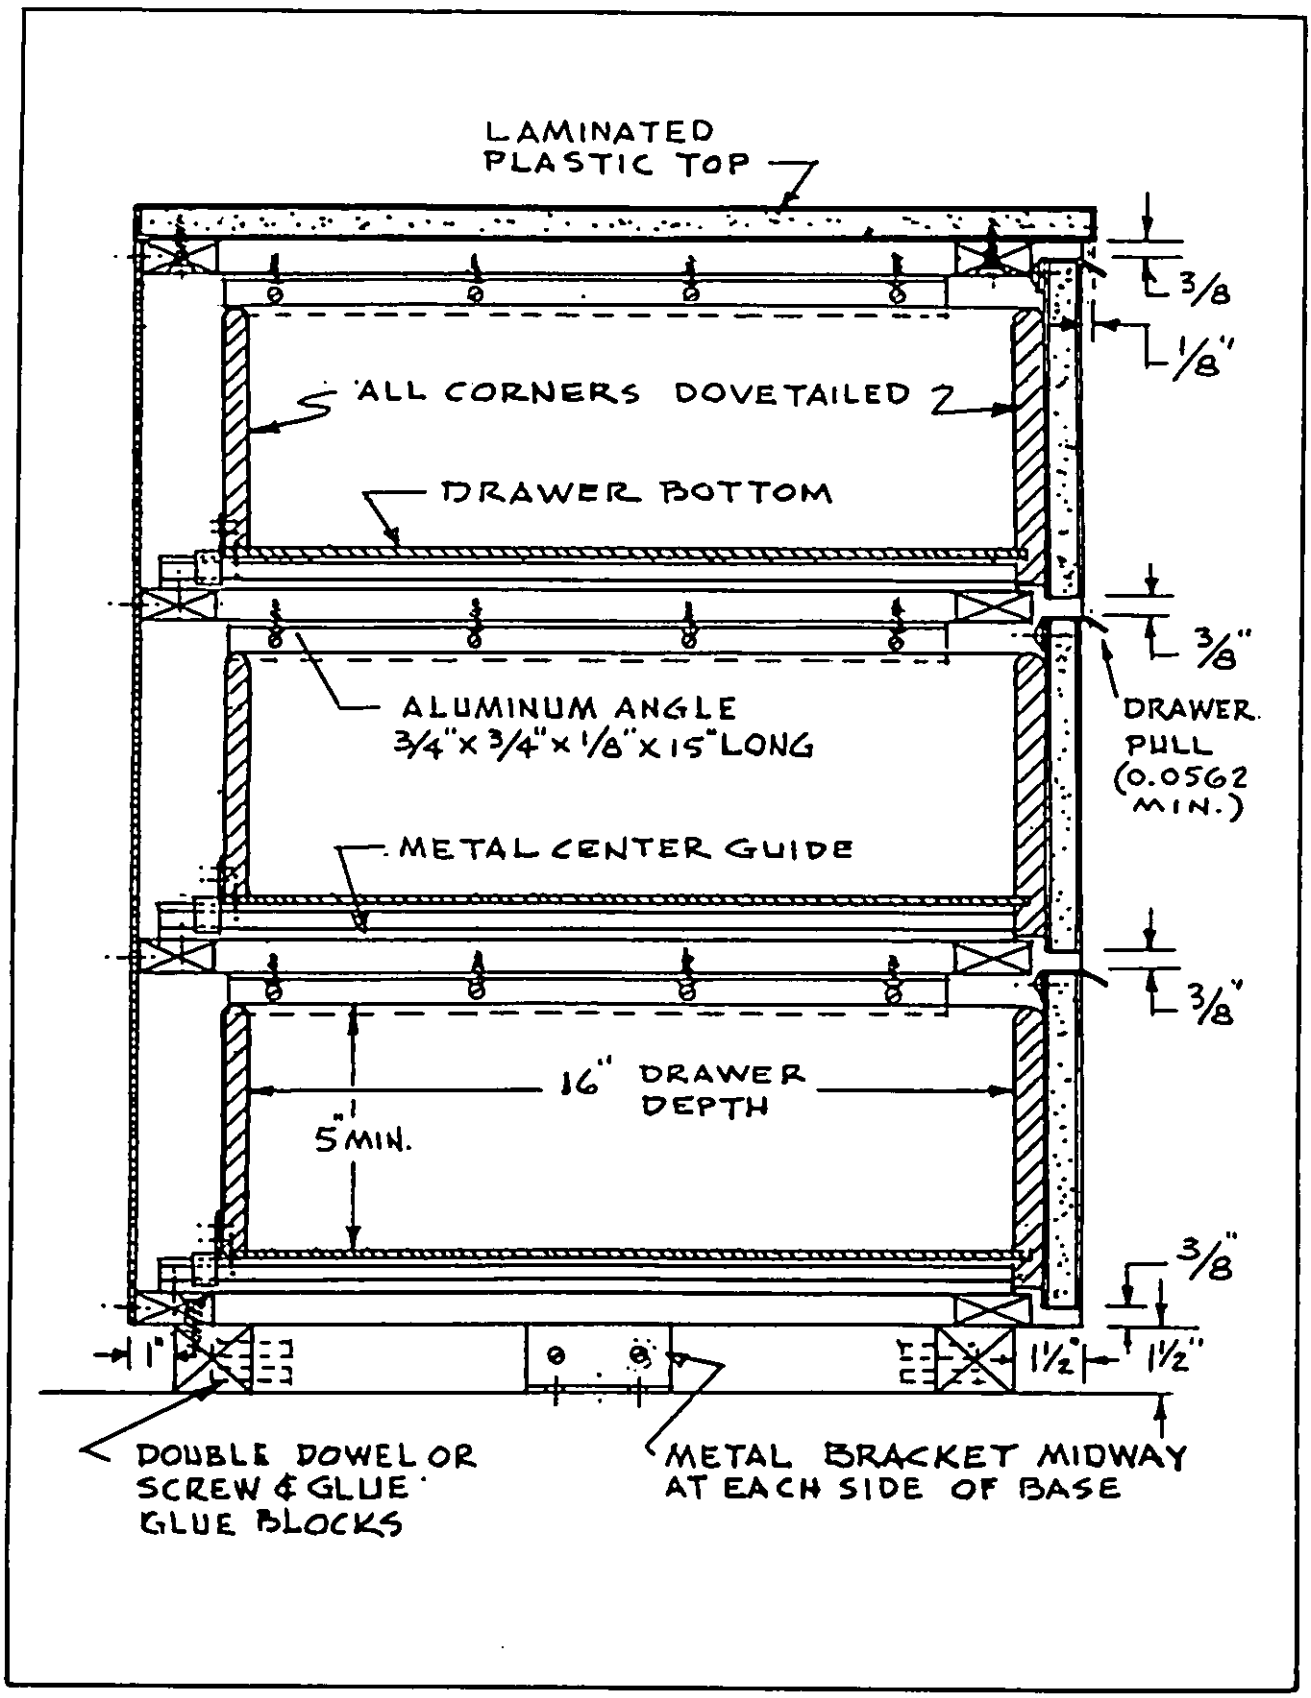


FIGURE 4. Wood-frame cabinet - cross section.

Source: https://assist.dla.mil -- Downloaded: 20260-20T13:17Z
Check the source to verify that this is the current version before use.

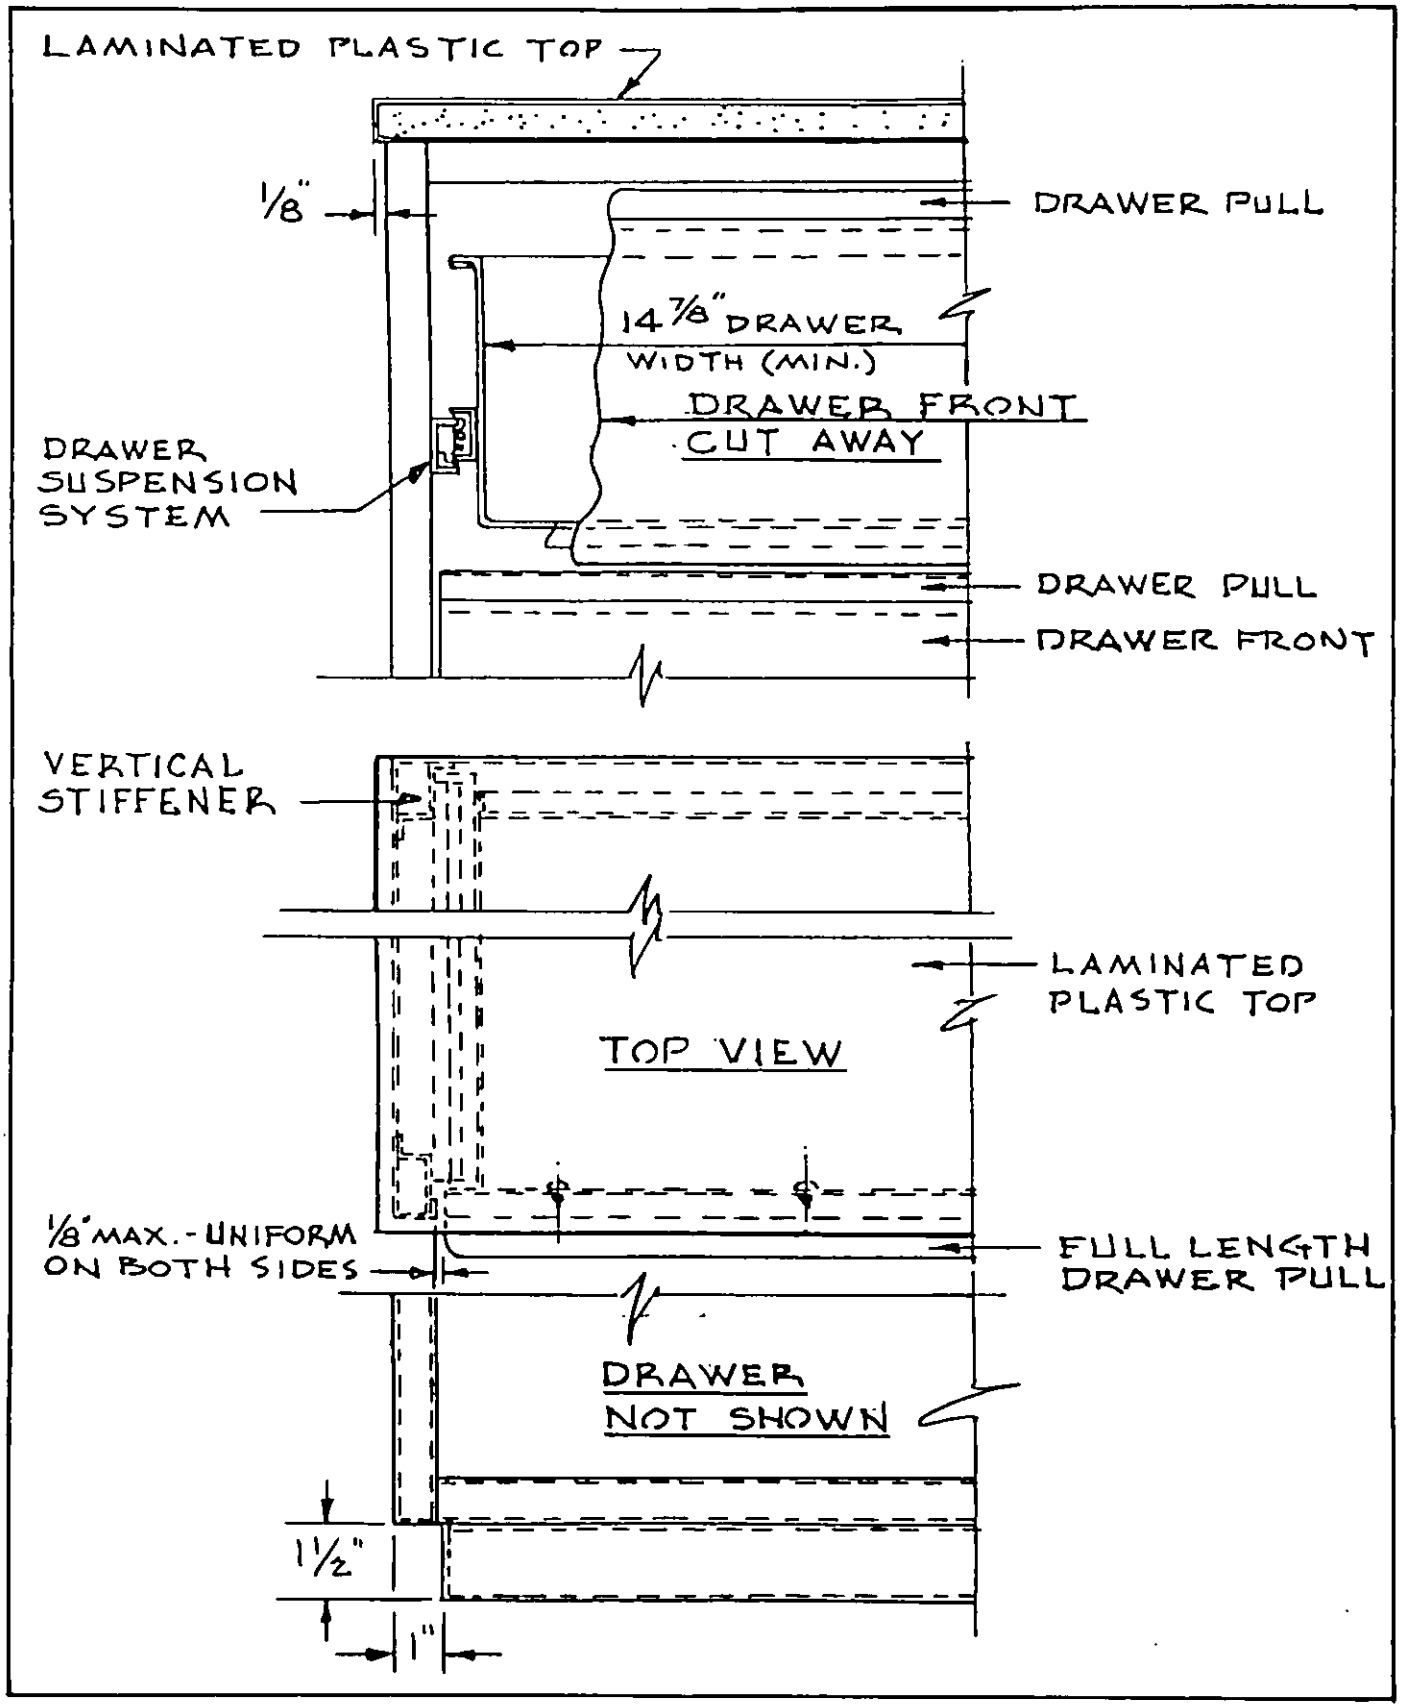


FIGURE 5. Metal-frame cabinet - sectional views.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

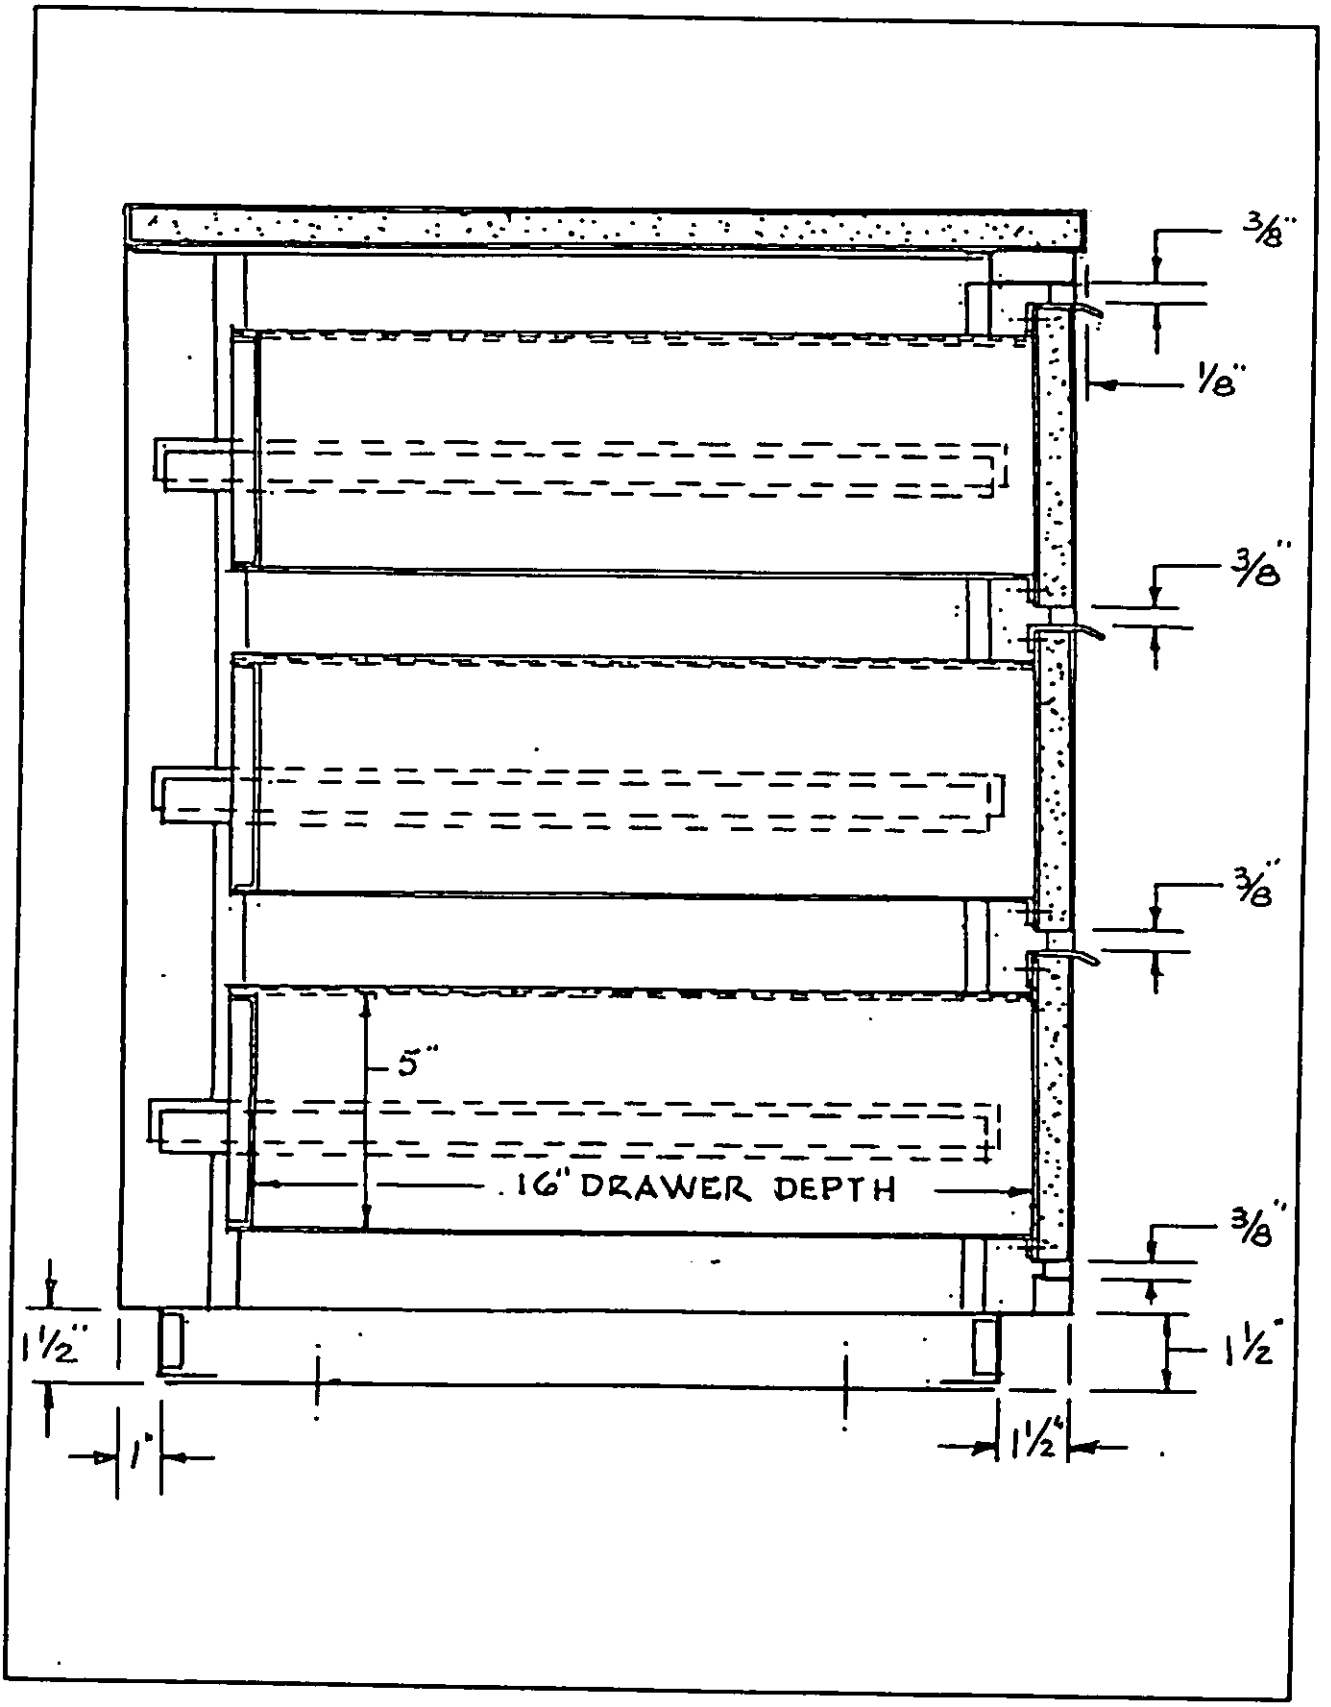


FIGURE 6. Metal-frame cabinet - cross section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-28580C(YD)	18 MARCH 1991

3. DOCUMENT TITLE
CABINET, STORAGE; WARDROBE, THREE DRAWER

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
NCBC	(805)982-5572	551-5572
c. ADDRESS (Include Zip Code) PORT HUENEME, CA 93043	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:17Z
Check the source to verify that this is the current version before use.