MILITARY SPECIFICATION

HOOK, DRAWBAR, LOGGING

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a commercially available, five-way, drawbar hook of a one piece, cast steel construction for use with multiple wire ropes and ferrules.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified (see 6.2), the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-116 - Preservation, Methods of.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized Unit Loads
MIL-STD-794 - Part and Equipment, Procedures for Packaging and Packing of

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3695

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:23Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D3951 - Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish a drawbar hook for first article inspection and approval (see 4.2.1 and 6.3).

3.2 Standard commercial product. The drawbar hook shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the drawbar hook being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 Description. The drawbar hook shall have a shape that approximates figure 1, and have five openings capable of receiving a 0.75 inch to 1.00-inch wire rope with a ferrule. Mounting facilities for the drawbar shall be a through bore of not less than 1.88 inches diameter by at least 2.38 inches deep, with the vertical center line of the bore perpendicular and in alinement with the longitudinal center line of the middle opening. All surfaces over which the wire ropes will lay shall be smooth, curved, and rounded to prevent damage to the ropes.

3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:23Z
Check the source to verify that this is the current version before use.

reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.4.1 Steel. The material shall be medium carbon Mn-Cr-Mo cast steel similar to AISI 4130.

3.5 Weight. The weight of the hook shall be approximately 50 pounds (lb).

3.6 Identification. The hooks shall be permanently and legibly marked with the manufacturer's name or trademark. When specified (see 6.2), marking of the hook shall include the National Stock Number (NSN).

3.7 Workmanship. Drawbar hooks shall be of uniform quality and condition, free from blowholes, porosity, hard spots, cracks, shrinkage defects, and other injurious defects.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The contractor is responsible for insuring that supplies and materials are inspected for compliance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one drawbar hook when a first article is required (see 3.1 and 6.2). This inspection shall include the examination of 4.4. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4, and the packaging inspection of 4.5. This inspection shall be performed on the samples selected in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:23Z
Check the source to verify that this is the current version before use.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. All drawbar hooks offered for delivery at one time shall be considered a lot for the purpose of inspection. The inspection level shall be level II and the Acceptable Quality Level (AQL) shall be 2.5 percent defective. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for a complete reinspection. Resubmitted lots shall be reinspected using tightened inspection. If the rejected lot was screened, reinspection shall be limited to the defect causing rejection. If the lot was reprocessed, reinspection shall be performed for all defects. Rejected lots shall be separate from new lots, and shall be clearly identified as reinspected lots.

4.4 Examination. Each sample selected shall be examined for defects listed in table 1.

TABLE 1. Classification of defects.

Classification	Defects	Requirement paragraph
Critical	None defined.	3.3
Major:		
101	Not shaped in accordance with figure in specification.	3.3
102	Capacity of openings not as required.	3.3
103	Dimensions, perpendicularity; and alinement of mounting hole not as required.	3.3
104	Material not as specified.	3.4,3.4.1
105	Marking of manufacturer's name or trademark missing or illegible.	3.6
106	Workmanship not of a quality specified.	3.7

4.5 Packaging inspection. The preservation, packing, and marking of the item shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each drawbar hook shall be preserved and packaged method III in accordance with MIL-P-116.

5.1.2 Commercial. Each drawbar hook shall be preserved and packaged in accordance with ASTM D3951.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Levels A and B. Packing shall be in accordance with MIL-STD-794. Containers shall be selected from table I for the appropriate level.

5.2.2 Commercial. Drawbar hooks shall be packed in accordance with ASTM D3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:23Z
Check the source to verify that this is the current version before use.

5.3 Palletization. Material shall be palletized in accordance with MIL-STD-147 when the following criteria are met:

a. Load to consist of four or more unskidded containers; and,
b. Load shall utilize a minimum of 80 percent of the pallet base.

5.4 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Drawbar hooks are intended for use with ferrules-ended multiple chokers in logging operations, such as the simultaneous towing and skidding of five logs.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. When a first article sample is required (see 3.1, 4.2.1, and 6.3).
c. When a NSN is required for identification (see 3.6).
d. Level of preservation and level of packing required (see 5.1 and 5.2).

6.3 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL) and invokes the provisions of paragraph 7-104.9(n) of the Defense Acquisition Regulations (DAR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL (DD Form 1423) incorporated into the contract. When the provisions of DAR 7-104.9(n) are not invoked, the data shall be delivered in accordance with the contract requirements.

6.4 First article. When a first article inspection is required, the item will be tested and should be a first production item consisting of one drawbar hook or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:

Navy - YD

Project No. 3695-N005

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:23Z
Check the source to verify that this is the current version before use.

NOTE:
DO NOT SCALE DRAWING.

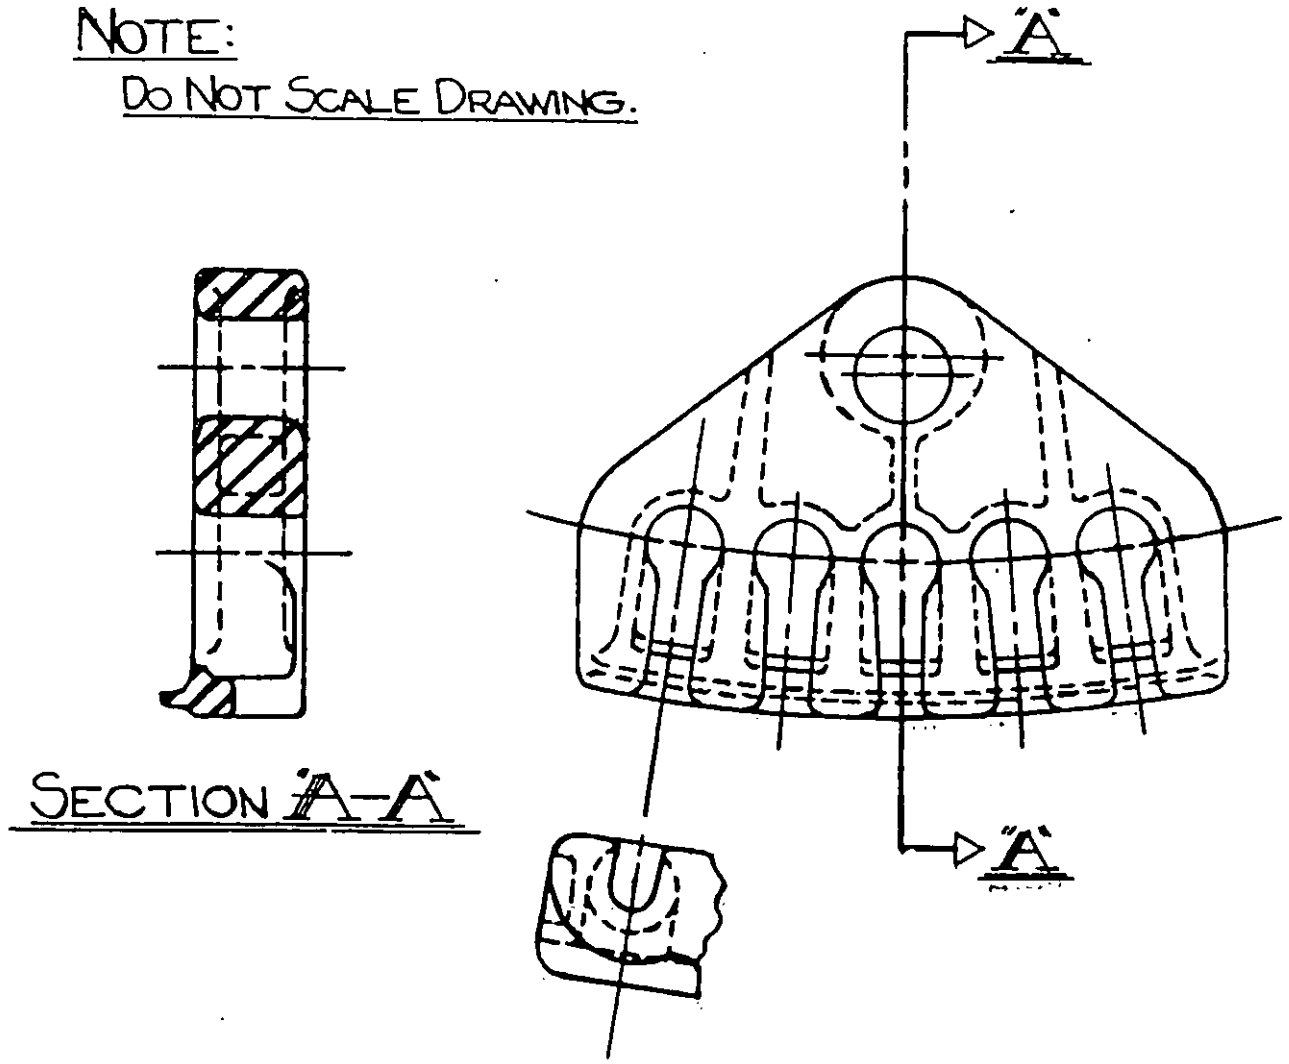


Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Commander
Naval Facilities Engineering Command
200 Stovall Street
Alexandria, VA 22332

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Construction Battalion Center (156)
Port Hueneme, CA 93043

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-H-28604A(YD)	HOOK, DRAWBAR, LOGGING

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USEF
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional

b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional

c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional

8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assistdocs.mil. Downloaded: 2026-10-20T13:23Z
Check the source to verify that this is the current version before use.