|INCH-POUND|

MIL-W-28581C
8 April 1994
SUPERSEDING
MIL-W-28581B(YD)
4 March 1985

MILITARY SPECIFICATION

WARDROBES: CLOTHING, COMPOSITE WOOD AND METAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers wardrobes for clothing storage.

1.2 Classification. Wardrobes covered by this specification shall be of the type, size, class, and style as specified (see 1.2.1 and 3.3).

1.2.1 Part numbers. A Part or Identifying Number (PIN) has been established. The PIN is made up of the document identifier and the PIN code numbers (see 6.2, 6.3 and table I).

|Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.|

AMSC N/A FSC 7105

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

Type I - Open above wardrobe	1
Size A - 36 inches wide	A
Class 1 - 8 feet high with hatshelf	1
Style A - Three-door	A
Style B - Two-door	B
Class 2 - 7 feet 6 inches high without hatshelf	2
Style A - Three-door	A
Style B - Two-door	B
Size B - 42 inches wide	B
Class 1 - 8 feet high with hatshelf	1
Style A - Three-door	A
Style B - Two-door	B
Class 2 - 7 feet 6 inches high without hatshelf	2
Style A - Three-door	A
Style B - Two-door	B
Type II - Scribed to the overhead with filler panels	2
Size A - 36 inches wide	A
Class 1 - 8 feet high with hatshelf	1
Style A - Three-door	A
Style B - Two-door	B
Class 2 - 7 feet 6 inches high without hatshelf	2
Style A - Three-door	A
Style B - Two-door	B
Size B - 42 inches wide	B
Class 1 - 8 feet high with hatshelf	1
Style A - Three-door	A
Style B - Two-door	B
Class 2 - 7 feet 6 inches high without hatshelf	2
Style A - Three-door	A
Style B - Two-door	B

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

L-P-508 - Plastic Sheet, Laminated, Decorative and Nondecorative.
SS-W-40 - Wall Base: Rubber, and Vinyl Plastic.
TT-C-490 - Cleaning Methods for Ferrous Surfaces and Pretreatments for Organic Coatings.
TT-E-529 - Enamel, Alkyd, Semigloss.
TT-P-664 - Primer Coating, Alkyd, Corrosion-Inhibiting, Lead and Chromate Free, VOC-Compliant.
TT-W-572 - Wood Preservative: Water-Repellent.
MMM-A-188 - Adhesive, Urea-Resin-Type (Liquid and Powder).

MILITARY

MIL-P-116 - Preservation, Methods of.
MIL-C-5541 - Chemical Conversion Coatings on Aluminum and Aluminum Alloys.
MIL-P-53030 - Primer Coating, Epoxy, Water Reducible, Lead and Chromate Free

STANDARDS

FEDERAL

FED-STD-H28 - Screw-Thread Standards for Federal Services.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-2073-1 - DoD Materiel Procedures for Development and Application of Packaging Requirements.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

NATIONAL BUREAU OF STANDARDS (NBS)

NBS PS51 - Hardwood and Decorative Plywood.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents which are current on the date of the solicitation (see 6.2).

THE ALUMINUM ASSOCIATION, INC. (AA)

AA - Designation System for Aluminum Finishes.

(Application for copies should be addressed to The Aluminum Association, Inc., 900 19th Street, N.W., Washington, DC 20006.)

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

ANSI A156.16 - Auxiliary Hardware.
ANSI A156.18 - Materials and Finishes.

(Application for copies should be addressed to the American National Standards Institute, Inc., 11 West 42nd Street, New York, NY 10036.)

ASTM

ASTM A 366/A 366M	- Steel, Sheet, Carbon, Cold-Rolled, Commercial Quality.
ASTM B 211	- Aluminum and Aluminum Alloy Bar, Rod and Wire.
ASTM C 1036	- Flat Glass.
ASTM D 1037	- Evaluating Properties of Wood-Base Fiber and Particle Panel Materials.
ASTM D 3951	- Commercial Packaging.
ASTM E 380	- Use of the International System of Units (SI) (the Modernized Metric System).

(Application for copies should be addressed to ASTM, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN WELDING SOCIETY, INC. (AWS)

AWS C1.1 - Recommended Practices for Resistance Welding.

(Application for copies should be addressed to the American Welding Society, Inc., 550 N.W. LeJeune Road, P.O. Box 351040, Miami, FL 33135.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish a wardrobe for first article inspection and approval (see 4.2.1).

3.2 Standard commercial product. The wardrobes shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the wardrobes being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 Design. Each wardrobe shall consist of two compartments: a clothes hanging compartment and an overhead storage compartment. The left door (determined by facing the wardrobe) shall be provided with the latching and locking mechanism. The active door is fastened with a padlock securing all doors. Doors shall be particleboard, surfaced front and back with laminated plastic sheets. The sides, back, and horizontal components shall be particleboard or steel. The overall dimensions of class I wardrobes shall be as shown on figures 1 and 2, and the overall dimensions of class 2 wardrobes shall be as shown on figures 3 and 4. A minus tolerance not to exceed 1/2-inch is permitted for the overall wardrobe height where required to facilitate installation without damage to ceiling surface.

3.3.1 Wardrobe styles.

3.3.1.1 Wardrobe style A. When style A wardrobes are specified, the clothes hanging compartment shall be provided with two doors hinged at each side of the wardrobe, and the overhead storage compartment shall be provided with a single door hinged at the top (see figures 1 and 3). The overhead storage compartment door shall latch automatically when closed and shall be capable of being released only from the interior.

3.3.1.2 Wardrobe style B. When style B wardrobes are specified, both the clothes hanging compartment and the overhead storage compartment shall be completely enclosed by two doors hinged at each side of the wardrobe (see figures 2 and 4).

3.3.2 Wardrobe condition. Unless otherwise specified (see 6.2), wardrobes shall be provided in a knocked-down (KD) condition.

3.3.2.1 KD condition for delivery. Wardrobes shall be provided KD complete with all necessary components and hardware required to provide a unit capable of being assembled without drilling, cutting, or other modification of components or subassemblies. Maximum assembly possible shall be done at the manufacturer's plant. Minimum assembly for KD condition shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

a. Doors shall be hung on the front frame. The door locking and latching mechanism, active door astragal, inactive door edge strip, and for style A wardrobes the elbow catch strike shall be installed, except cap nut shall not be secured to the spindle (see 3.6.5).
b. Aluminum angles and channels shall be installed on sides when sides are particleboard.
c. When back is particleboard, it shall be installed in the back frame and the aluminum channels attached at proper locations.
d. The elbow catch shall be installed on the intermediate bottom of style A wardrobes.

3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products is allowed under this specification.

3.4.1 Plywood. Plywood for bases shall be a minimum of 5 plies, 3/4-inch thick and in accordance with NBS PS51 type II with face and back veneers grade 2 or better.

3.4.2 Particleboard. Particleboard shall weigh at least 42 pounds per cubic foot, at 6 to 9 percent moisture content. The particleboard panels may be single ply homogeneous wood flake, three layer wood flake, or three layer with graded medium size wood chip center and wood flake faces. All chips and flakes shall be resin coated, impregnated and bonded together under heat and pressure by the flat-plated method of pressing. Particleboard panels shall be dimensionally stable and free from appreciable warpage which may adversely affect appearance or serviceability. Panel faces shall be flat and smooth to eliminate "telegraphing" of defects through plastic laminate surface material. The particleboard shall have the following physical properties determined in accordance with ASTM D 1037.

Modulus of Elasticity	- 425,000 pound-force per square inch (psi) minimum (min)
Modulus of Rupture	- 2,700 psi (min)
Internal Bond	- 80 psi (min)
Swelling (thickness)	- 10 percent maximum
Screw Holding (Face)	- 280 pounds (min)
Screw Holding (Edge)	- 235 pounds (min)

Particleboard for painting shall be filled and sanded to produce a smooth, paintable surface. Filler material shall be fully compatible with the coating system utilized. Color of filler for surfaces to receive clear coating shall match the particleboard color range as nearly as practicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

3.4.3 Steel. Steel shall conform to ASTM A 366. Sheets of 16 gauge and lighter shall have stretcher-leveled standard of flatness.

3.4.4 Aluminum. Aluminum alloy extrusions used in the fabrication of frame components shall conform to temper T-5 of ASTM B 211.

3.4.5 Laminated plastic sheets.

3.4.5.1 Decorative laminated plastic sheets. Decorative laminated plastic sheets shall be 0.032-inch thick and in accordance with L-P-508, style D, type I, class 1.

3.4.5.2 Nondecorative laminated plastic sheets. Nondecorative laminated plastic sheets shall be 0.030-inch thick and in accordance with L-P-508, style ND, type IV.

3.4.6 Door locking and latching mechanism. The active door shall be provided with a three-point latching and locking mechanism similar and equal to Capitol Division Assembly No. 25719 shown on figures 5 and 6. The handle shall be of the lever type, of cast brass or bronze with an integral lug having a hole to receive a padlock shackle. Locking shall be accomplished by padlocking the handle to a 0.125-inch thick chromium-plated steel keeper located above the handle which contains a matching hole. A 0.062-inch thick rectangular corrosion-resistant steel shield shall be provided to protect the door from damage by the padlock. The keeper and shield shall be punched with two matching square holes in each to accommodate the square shank of the carriage bolts. The carriage bolt shank shall be long enough to extend through both the keeper and shield, when assembled. The carriage bolt shall be 1/4-20, one-inch long with a head diameter of 0.450 inch $\pm$0.020 inch. Exposed portions of the handle shall have satin chromium plating. The shield and keeper shall have a satin finish to match the handle. The carriage bolt heads shall have a satin chromium plating or shall be bright zinc plated and lacquered. Interior components shall be barrel cadmium plated. The handle nut shall be either a self-locking nylon insert nut, a self-locking thread nut, or a cap nut with a roll pin or set screw.

3.4.7 Hinges. The door hinge shall be brass or steel, minimum 0.062-inch thick leaves, 5-knuckle, fast spun pin type with 0.156-inch minimum pin diameter, 2-1/2 inch long joint, and finished in satin chromium. When doors are closed, only the joint shall be exposed. Both wings of the hinge shall be swaged. The leaf shall wrap-around the door with an off-set of not more than 7/8 inch for acceptance of the door thickness. The hinge frame leaf shall be provided with three countersunk holes and the door leaf shall be provided with four countersunk holes. One of the holes in the door leaf shall be located to permit screwing into the door-edge as shown on figures 10 and 17.

3.4.8 Clothes hanging rod. The clothes hanging rod shall be bright finish corrosion-resistant clad steel tubing with an outside diameter of 1-1/16 inches and a wall thickness of not less than 0.087 inch, similar and equal to Knape and Vogt No. 660. On wardrobes with particleboard sides, flanges for securing the rod to the sides shall be polished chromium finished steel similar and equal to Knape and Vogt No. 734. On wardrobes with steel sides, the brackets shall be 12 gauge steel. Clothes hanging rods with exposed ends shall be provided with plastic caps to avoid marring the finish of the sides.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

3.4.9 Elbow catch and strike. When style A wardrobes are specified, the elbow catch, shown on figures 7 and 8, shall be steel, cast iron or cast brass, with a dull nickel plated or satin chromium plated finish. The head of the elbow catch lever shall be not less than 1/4 inch deep to avoid slipping the strike off the lever head. The 16 gauge minimum corrosion-resistant (stainless) steel upper door strike shall be fabricated as shown on figure 7.

3.4.10 Coat and hat hook. Each wardrobe shall be provided with two coat and hat hooks conforming to type L73112 (cast iron) of ANSI A156.16, finish 633 of ANSI A156.18. As an alternate, coat and hat hooks shall conform to type L43112 (wrought aluminum) of ANSI A156.16, finish 628 of ANSI A156.18.

3.4.11 Towel bar. When specified (see 3.6.1, 6.2 and 6.5), a towel bar shall be furnished for each wardrobe. Bar shall be Hall-Mack Company Number 896 or equal. Bar shall be minimum 5/8 inch square, corrosion-resistant steel tubing with chromium plated brackets, and shall be minimum 18 inches long.

3.4.12 Wall base. When specified (see 3.6.4, 6.2 and 6.6), vinyl wall base in accordance with SS-W-40, type II, style A (straight) or style B (cove) as specified (see 6.2 and 6.6), shall be provided. The vinyl wall base shall be 0.125 inch thick, 4 inches high unless base height other than 4 inches is specified (see 3.6.4). If wardrobe base height is other than 4 inches, the vinyl wall base height shall match the wardrobe base height. Unless otherwise specified (see 6.2), the wall base color shall be black.

3.4.13 Mirror. When specified (see 6.2), a 12- by 18-inch mirror shall be provided for size A wardrobes, and a 14- by 20-inch mirror shall be provided for size B wardrobes. Mirrors shall conform to type I, class 1, mirror glazing quality of ASTM C 1036. Mirror edges shall be polished smooth. The back shall be completely silvered and covered with a heavy coat of copper applied by the copper electro-plating process. Mirror plating shall be protected by an organic coating. Two aluminum or chromium plated steel "Z" type strips and two side clips shall be provided for fastening the mirror to the door. The "Z" strips shall extend the full width of the mirror. Felt strip shall be provided to envelop the mirror edges to avoid metal contacting the mirror edges.

3.4.14 Label holder. When specified (see 6.2), a steel label holder finished in satin chromium plating and capable of holding a card or label approximately 2-3/4 by 1-1/2 inches shall be secured to the inactive door with not less than three escutcheon pins. The label holder shall be centered on the door width, 5 feet above the floor.

3.4.15 Miscellaneous hardware. Miscellaneous hardware items used in fastening wardrobe components, such as sheet metal screws, nuts and bolts, tee-nuts, and machine screws, shall conform to the thread requirements of FED-STD-H28. Miscellaneous hardware shall be chromium plated or similarly plated to prevent rusting, oxidation, or electrolytic action.

3.5 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to ensure interchangeability of component parts, assemblies, accessories, and spare parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 General. Wardrobe construction shall be in accordance with figures 1 through 28. All dimensions, sizes, and thicknesses of materials shown on referenced figures or specified herein are minimum unless otherwise noted. Two basic materials, except for the doors (see 3.3), at manufacturer's option, shall be particleboard with welded aluminum frame, or all steel with welded frame. The material option selected shall be used for all components on the same purchase order or contract. That is: If the particleboard option is selected, the wardrobes shall be aluminum framed with all major components such as sides, top, back, bottom, and shelves of particleboard; if the steel option is selected, the wardrobes shall be steel framed with all major components of steel. Wardrobe bases shall be in accordance with 3.6.4. When towel bars are specified, they shall be mounted on the exterior of the wardrobe sides (see 3.4.11 and 6.5). When feasible, towel bars shall be located on the side or sides least exposed to view. Steel wardrobe sides used for mounting towel bars shall be reinforced and the bar fastened by through bolting. All screw and bolt ends projecting into the wardrobe interior shall be covered. Materials shall be in accordance with 3.4 and finishes in accordance with 3.7. When class 2 wardrobes are specified, the hatshelf and hatshelf components shall be deleted and the spacing of other horizontal components shall be in accordance with figures 3 and 4.

3.6.1.1 Measurement system. To eliminate barriers to procurement of products fabricated to metric dimensions, and unless otherwise specified, either the U.S. Customary System of Units (US) or the International System of Units (SI) may be used in the construction of these wardrobes. When only one system of measurement is acceptable, the particular system required shall be as specified. In this specification, all measurements, dimensions, sizes and capacities are given in U.S. units. These measurements may be converted to SI units through the use of the conversion factors and methods specified in ASTM E 380.

3.6.2 Construction - particleboard option. The particleboard components shall be 1/2-inch thick, except that the hatshelf and the particleboard core for doors shall be 3/4-inch thick. The sides and back shall extend the full height and depth of the wardrobe, less the base height. Top, intermediate bottom, hat shelf, and bottom shall occupy the full interior width and depth of the wardrobe, except the hatshelf shall be 15 inches deep.

3.6.2.1 Aluminum frame. Front and back frames shall be welded and constructed of extruded aluminum shapes as shown on figures 9, 10 and 11. Welding at the frame corners and intersections shall be as shown on figure 9 and as specified in 3.9.2. Edges of joining frame members shall meet flush, be uniform, without gaps, and be free of sharp edges, burrs, or other visual defects.

3.6.2.2 Particleboard assembly.

3.6.2.2.1 Sides to front and back frames. The wardrobe sides shall be fastened to the front and back frames by being through bolted with capped tee-nuts and button head hex-socket cap screws as shown on figures 10 and 11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

Each side shall be secured with six fasteners, three at the front and three at the back. One fastener shall be centered vertically, the others located approximately 6 inches from the top and bottom.

3.6.2.2.2 Back to back frame. The back shall be inserted into the vertical frame members and fastened at each of the three connector angles on each side with two sheet metal screws as shown on figures 11, 12 and 13. On "island type" installations with exposed backs, the back of wardrobes shall be further fastened across the center leg of the top channel, intermediate channel, and bottom channel with three sheet metal screws on each channel. The screw ends shall not penetrate the back exterior surface.

3.6.2.2.3 Horizontal components. The horizontal components shall be supported at the sides by channels and angles as shown on figure 9. Each horizontal component support shall be secured to the side with not less than three flat-head sheet metal screws, except the hatshelf support shall be secured with not less than two sheet metal screws. The horizontal components shall be secured at the front and back by being inserted into the channels of the front and back frames as shown on figures 12 and 13.

3.6.2.2.4 Elbow catch. When style A wardrobes are specified, the center front of the intermediate bottom shall be bored at an angle as shown on figure 7 for operation of the elbow catch from the clothes hanging compartment. The elbow catch shall be secured to an aluminum angle with flathead, self-tapping machine screws as shown on figure 7. The aluminum angle shall be fastened by through bolting to avoid being loosened by the action of the door strike on the elbow catch. To avoid exposed ends of bolts, cap nuts or acorn nuts shall be used on the underside of the intermediate shelf. Washers and lock-washers shall be provided under the nuts as shown on figure 7. The elbow catch shall be protected against tampering by the 1/2-inch high door stop section of the frame member as shown on figure 7. A corrosion-resistant steel strike fastened to the door interior surface shall secure the door in the closed position.

3.6.2.2.5 Clothes hanging rod and coat hooks. The clothes hanging rod and brackets, and the coat hooks, shall be installed at the locations shown on figures 12 and 13 for class 1 wardrobes and at the locations shown on figures 3 and 4 for class 2 wardrobes.

3.6.3 Construction - steel option.

3.6.3.1 Steel frame. The front frame shall be 18 gauge steel with the horizontal and vertical members formed as shown on figures 14 and 15, and detailed on figures 16 through 23. The horizontal members shall be inset on the vertical members, accurately aligned and jigged. The matching frame surfaces shall be spot welded and the interior intersections tack welded as specified in 3.9.2 and shown on figures 14 and 15. The edges of the joining members shall meet flush, uniformly, and without gaps. The horizontal frame members at the top and at the front of the intermediate bottom shall be reinforced at the center by rail fillers spot welded thereto as shown on figures 20 and 21. When style A wardrobes are specified, the elbow catch shall be secured at the center of the rail filler with the catch operating lever extending below the rail filler as shown on figures 8 and 20. The catch shall be accurately positioned to secure the storage compartment door in the closed position by acting on the upper door strike fastened to the door interior surface as shown on figure 20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

3.6.3.2 Steel assembly. Basic fabrication of the steel base shall be as shown on figure 16. The sides and back shall be of three-piece construction joined by folding vertical edges of the back or sides as shown on figure 17. The front frame and sides shall be joined to form a closed channel forming a double thickness secured on each side with four equally spaced sheet metal screws as shown on figure 17. Joggle strips and "Z" bar supports for securing the horizontal components to the sides and back shall be of the depth and width as shown on figures 18 through 23 and shall be securely and permanently spot welded thereto. The clothes hanging rod bracket shall be spot welded to the sides as shown on figure 19. The clothes hanging rods with capped ends shall be installed in the brackets. The steel horizontal components, consisting of the top, intermediate bottom, hatshelf, and bottom, shall be provided with a minimum 3/4-inch flange at each side and open channels at the back, as shown on figures 18, 19, and 23. When a separate base is specified, the bottom of the back shall be formed as shown on figure 22. The fronts of the top and intermediate bottom shall be formed as shown on figures 20 and 21. The top, bottom and intermediate bottom shall be reinforced at the underside by a 3/4-inch hat section extending the full width of the component. The top shall be secured to the sides and back "Z" bar supports by not less than two screws on each side and back as shown on figure 18. The front of the top shall be secured with two screws as shown on figures 20 and 21. The intermediate bottom shall be secured to the sides by inserting the flanges into joggle strips. The front and back channel formations shall intermember with, and be secured to, similar matching formations as shown on figures 18, 20, and 21. The back shall be secured with not less than two fasteners and the front secured by not less than three fasteners. The hatshelf shall be fastened at the sides and back in the same manner as the intermediate bottom. In addition, the closed box section at the front of the hatshelf shall be secured to integral lock tabs as shown on figure 19. When a separate base is provided, prior to installation of the wardrobe bottom, the sides and back shall be secured to the base (see 3.6.4.2.2) by a minimum of two screws at each side and at the back as shown on figure 22. The bottom shall then be secured to the base at the front corners.

3.6.4 Bases. Unless otherwise specified (see 6.2), wardrobe base shall be 4 inches high and recessed at the front not less than 1-1/4 inches. Unless otherwise specified (see 6.2), particleboard constructed wardrobes shall be provided with separate bases. Manufacturers shall have the option of providing separate or integral bases for steel constructed wardrobes. Bases shall be plywood (see 3.4.1) when particleboard option is selected and steel when the steel option is selected. When specified (see 3.4.12), a vinyl wall base shall be bonded to the wardrobe front toe space and sides. Vinyl wall base shall be one continuous piece on both individual and group installations, except "island type" installations. "Island type" installations shall be covered by not more than two pieces with the ends cut square and meeting flush at the center of the wardrobe sides. The vinyl wall base shall be bonded in accordance with the manufacturer's instructions.

3.6.4.1 Integral steel base. When the integral base is provided for steel constructed wardrobes, the base shall be formed by extending the sides, back, and front frame to the floor. The wardrobe bottom shall be installed as shown on figure 23. The bottom of the sides, back, and front frame shall form channels in lieu of flanges for additional stability (see figure 23).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

3.6.4.2 Separate bases.

3.6.4.2.1 Plywood base. Base corners shall be fastened by full-length solid wood corner blocks securely screwed and glued. Hardwood blocks shall be centered on each side of the base top for securing the wardrobe bottom as shown on figures 12 and 13. When wardrobes are to be fastened to the floor, installation angles shall be provided for each side of the base as shown on figures 12 and 13. Installation angles shall be aluminum or steel. Steel installation angles shall be zinc coated or similarly treated for corrosion resistance. Plywood used for bases shall be treated in accordance with 3.7.7.

3.6.4.2.2 Steel base. The steel base shall be fabricated as shown on figure 23. It may be fabricated from four pieces with overlap at each corner and fastened by spot welding. The bottom flanges and top horizontal sections shall be overlapped and spot welded. The bottom flanges or gussets shall be punched for anchoring the base to the floor. For additional stability, each bottom flange corner shall be gusseted. The base design shall allow for adjustment of the wardrobe front-to-back and side-to-side to accommodate installation conditions. This feature shall be limited to a total travel of 3/4-inch, and shall provide a minimum toe space of 1-1/4 inch.

3.6.5 Doors. All wardrobe doors shall be 3/4-inch thick particleboard covered on both sides with laminated plastic sheets. Exteriors of doors shall be covered with decorative laminated plastic sheets and interiors shall be covered with nondecorative laminated plastic sheets. The bottom and side edges of the top storage compartment door shall be self-edged with the same decorative laminated plastic as used on door exterior. The laminated plastic shall be bonded to the particleboard with urea resin adhesive conforming to MMM-A-188. The assembly periods, clamping, or pressing time shall be in accordance with the adhesive manufacturer's instructions to assure a permanent and secure bond. All edges and corners of laminated plastic shall be beveled smooth to eliminate sharp edges. Each door shall be secured to the frame with three hinges. When reinforcement pads or threaded plates are used on the unexposed side of the front frame to secure the hinge screws, the pads or plates shall be permanently secured to the frame members as shown on figures 17 and 20. To reduce the gap between the doors and frame to not more than 1/8 inch on aluminum framed wardrobes, edges of doors at hinge locations shall be routed to the thickness and length of the hinge leaf as shown on figure 10. Steel framed wardrobes shall be clipped to inset the hinge leaf as shown on figure 17. The gap between the doors and the frame shall be uniform on all sides, and within a 1/8-inch limitation. The exposed surface of the offset leaf between door face and hinge barrel shall be not more than 1/16 inch. On steel framed wardrobes, the front edge of the inactive door shall be covered by a steel edge channel and the front edge of the active door shall be covered by a steel astragal. The steel channel and astragal for the door edges shall be finished in the same color as the front frame. The back edge of the steel channel and astragal shall be secured with sheet metal screws. On aluminum framed wardrobes, the inactive door front edge shall be covered by an aluminum molding and the active door front edge shall be covered by an aluminum astragal as shown on figure 11. The aluminum molding and astragal shall be secured with flat head, countersunk sheet metal screws. The channel, molding, and astragal fasteners shall be spaced not more than 9 inches apart, except on steel channel construction, where screws shall not be placed so as to interfere with the cam finger. Edges of wardrobe doors, including the top edge of the top storage compartment door, not covered by the channel, molding,

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

or astragal, shall be finished in accordance with 3.7.6 or shall be self-edging. The mirror shall be fastened to the active door, with the top of the mirror approximately 70 inches above the floor and centered on the door width. On wardrobes with steel sides, coat and hat hooks shall be fastened to the back of the inactive door. The left door shall be provided with a three-point latching and locking mechanism. The rectangular corrosion-resistant steel door shield shall be secured to the door with an escutcheon pin at each corner and shall butt against the door astragal as shown on figure 6. The handle keeper shall be fastened through the door with two carriage bolts and nuts. The square shank of the carriage bolt shall be inserted into the punched square holes in the keeper and shield. The door back shall be counterbored as necessary so the bolt ends and nuts are flush, avoiding interference with the operation of the retaining rods. Each retaining rod shall operate through two rod guides. One guide for each rod shall be secured to the door as close to the door top and bottom as possible when the door handle is in the open position. The remaining two guides shall be located as close to the middle of the rods as possible without interfering with the side movement of the rods. On wardrobes with a steel frame, the retaining rods shall secure the active door in the closed position by simultaneously extending into the front frame at top and bottom as shown on figures 20 through 23. The openings in the front frame shall be reinforced to provide a strong bearing surface. On an aluminum framed wardrobe, the retaining rods shall secure the active door in the closed position at the top and bottom by simultaneously engaging behind steel strikes secured to the aluminum frame as shown on figure 6. The finger on the cam shall extend beyond and behind the inactive door thereby providing the third point of the locking system. A strike plate shall be secured to the back of the inactive door to avoid damage by the cam finger. As the final step of hardware installation, the cap nut shall be secured to the spindle and tightened only to the extent to permit operation of the handle with normal pressure. Secure the cap nut by drilling into the spindle through the cap nut hole and installing the roll pin, or secure with a set screw. As an alternate to the cap nut with roll pin or set screw, a self-locking nylon insert nut may be used. All doors shall close against rubber bumpers. The doors shall close without the necessity of exerting pressure at the door top or bottom to allow the rods to pass the strikes or extend into the frame openings.

3.6.6 Assembly instructions. Detailed assembly instructions shall be provided. Assembly instructions shall include pictorial installation drawings showing components and subassemblies in relation to each other; and showing the type, quantity, and location of all fasteners required. In addition, written step-by-step sequence of assembly shall be provided. Assembly instructions shall be available for use and approval during first article inspection.

3.7 Finishes.

3.7.1 Aluminum finish. Aluminum extrusions, channels, and angles shall be etched and anodized in accordance with the AA Designation AA-M10C22A21, or treated in accordance with MIL-C-5541, type I or II, grade A or C, class 2, and given two coats of catalyzed butyrate clear lacquer baked for 15 minutes at 250 degrees Fahrenheit (^{o}F) or as recommended by the lacquer manufacturer.

3.7.2 Steel coatings and finish. All wardrobe components fabricated from steel, other than corrosion-resisting steel, shall be treated, coated, and finished as specified below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

3.7.2.1 Surface preparation. Steel components shall be treated in accordance with type I or type II of TT-C-490 when the finish coat is in accordance with 3.7.2.3.1. When the finish coat is in accordance with 3.7.2.3.2, preparation and treatment shall be as prescribed by the manufacturer of the epoxy powder.

3.7.2.2 Primer coatings. All treated components that are to be finish coated in accordance with 3.7.2.3.1 shall be given one coat of primer conforming to TT-P-636 and MIL-P-53030, applied to a minimum dry film thickness of 0.7 mil. The primer shall be baked for not less than 45 minutes at a temperature of 250°F, or an equivalent baking period as recommended by the paint manufacturer.

3.7.2.3 Finish coat. Unless specified (see 6.2), all treated steel surfaces shall be finished in accordance with 3.7.2.3.1 or 3.7.2.3.2. Paint colors shall be as specified (see 6.2 and 6.8).

3.7.2.3.1 Semi-gloss enamel finish. When the semi-gloss enamel finish is to be applied, all primed surfaces shall be finished with a coat of semi-gloss enamel conforming to class B of TT-E-529. The enamel shall be baked for not less than 45 minutes at 250°F, or an equivalent baking period as recommended by the paint manufacturer.

3.7.2.3.2 Thermoset dry-epoxy powder finish. When the dry-epoxy powder finish is to be applied, the epoxy powder shall have a specific gravity range of 1.5 to 1.8. The dry-epoxy powder shall be Glidden (Pulvalure Epoxy or epoxy-polyester), H. B. Fuller Company (Kativo Epoxy powders), or other products similar and equal. The epoxy powder shall be applied with electrostatic airless spray equipment. The metal, curing temperature, curing time, and application voltage shall be as prescribed by the manufacturer of the epoxy powder. The dry film thickness shall be not less than 1.5 mil.

3.7.3 Particleboard finish. The particleboard panels (see 3.4.2) shall be given a two coat application of a one-component, air-drying, oil-modified polyurethane resin coating. The exterior sides and exposed back coatings shall be pigmented. The gloss range for the pigmented exterior coatings shall be in the range of 45 to 65 when measured with a 60° glossmeter. The color shall be as specified (see 6.2). Coating of all particleboard interior surfaces and exterior of the back, when not exposed, shall be clear. Application of the polyurethane resin coatings shall be in accordance with the manufacturer's instructions.

The pigmented coating shall be one of the following:

a. GUARDSMAN POLYURETHANE PIGMENTED FINISH 262 SERIES. Manufactured by the Lambert Division of Guardsman Chemical Coatings, Inc., Grand Rapids, Michigan.

b. GLIDDEN POLYURETHANE PIGMENTED FLOOR COATING. Manufactured by the Glidden Company, Reading, Pennsylvania.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

The clear coating shall be one of the following:

a. GUARDSMAN POLYURETHANE CLEAR FINISH #235-010. Manufactured by the Lambert Division of Guardsman Chemical Coatings, Inc.

b. GLIDDEN POLYURETHANE CLEAR GLOSS. Manufactured by the Glidden Company.

3.7.4 Painted finishes. Painted finishes shall be smooth, without dirt, dust, or other foreign matter embedded. The finishes shall not be discolored, rippled, peeled, have sags or runs. Small scratches or areas of marred finish shall be touched up as necessary to match the surrounding finish. Large areas that are scratched or marred, affecting the appearance of the wardrobe finish, shall be replaced or the entire component refinished.

3.7.5 Decorative laminated plastic sheet finish. Finish, pattern, and color shall be as specified (see 6.2).

3.7.6 Particleboard edge sealer. Unless edges of wardrobe doors are covered otherwise, they shall be filled to smoothness, sanded, and coated with a pigmented catalyzed alkyd-urea conversion or polyurethane plastic finish. Pigment shall be a close match to the color of the decorative plastic sheet on the door exterior surface.

3.7.7 Plywood base treatment. Plywood used for the base shall be treated for resistance to moisture, fungus, and insect infestation. Treatment shall be by dipping into pentachlorophenol, conforming to type II, composition A of TT-W-572, with a mineral spirit solvent and an antiblooming agent of pine oil of less than 7 percent. The plywood shall be dipped for not less than 3 minutes. After treatment there shall be not less than 1/8 inch penetration of pentachlorophenol in the wood, no raised grain, and no adverse effect on wood working qualities. The treated plywood shall be dimensionally stable, clean, and glueable.

3.8 Identification marking. Identification shall be permanently and legibly marked directly on the side of the upper storage compartment interior or on a corrosion-resisting metal plate securely attached to the side of the upper storage compartment interior at the source of manufacturer. Identifi cation shall include the manufacturer's model and serial number, name and trademark to be readily identifiable to the manufacturer.

3.9 Workmanship.

3.9.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to ensure uniformity of size and shape.

3.9.2 Welding. Steel welding shall be inert-gas-shielded fusion or resistance process. All welding shall be done by experienced welders. Exposed welds, as viewed from the exterior of the item, shall be extended to the full width of the joining edges and shall be ground smooth and flush, matching the

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

adjacent surfaces. Unexposed welds do not require finish grinding, but shall have good uniform appearance. Each part shall be properly prepared to ensure soundness, maximum strength, and aligned in correct position by jigs or fixtures. Jigs shall be designed to permit expansion and contraction of the metal during the welding process to minimize buckling and distortion. All welds shall be thoroughly fused and sound, and shall be free from cracks, fissures, pits, holes, gas pockets, porosity, and undercutting. Spot welds shall be properly spaced, of sufficiently large diameter, and free from pits and flashes. The minimum diameter of the spot welds shall be 0.8 times the square root of the material thickness for the fused nugget, or the square root of the material thickness for the diameter of the pullout button.

3.9.3 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in this document shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one wardrobe when a first article is required (see 3.1 and 6.2). This inspection shall include the examination of 4.4 and the tests of 4.5 through 4.5.4. The first article may be either a first production item or a

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4, the tests of 4.5 through 4.5.4, and the packaging inspection of 4.6. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. The unit of product shall be one wardrobe. All wardrobes offered for delivery at one time shall be considered a lot for the purpose of inspection.

4.3.1 Sampling for examination. (See 6.9).

4.3.2 Sampling for tests. (See 6.9).

4.4 Examination. Each wardrobe shall be examined for compliance with the requirements specified in section 3 of this document. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirement shall constitute one defect.

4.5 Tests. The tests of 4.5.2 and 4.5.3 shall be conducted separately with an assembled wardrobe, with the wardrobe free standing.

4.5.1 Assembly test. The wardrobe shall be assembled from the KD condition to ready-for-use condition while following the assembly instructions provided with the wardrobe as specified in 3.6.6. The assembly shall proceed smoothly, without modification to the wardrobe, and without requiring any special skills or special tools.

4.5.2 Clothes hanging rod. A load of 160 pounds shall be distributed along the entire rod span. Deflection at the rod center shall be not more than 1/8 inch. Deflection in excess of 1/8 inch shall be considered a failure of the test.

4.5.3 Load test. A 150-pound load shall be placed on the upper storage unit bottom. The load shall be located and distributed as shown on figure 28. The test load shall remain in place not less than 5 minutes with all doors open. With the test load in place, all doors shall be closed and opened. If the sway or sag of the bottom and front frame interferes with the free operation of the doors and does not permit latching of the storage compartment door, this shall be considered a failure of the test.

4.5.4 Spot weld test. Conduct the test of AWS C1.1 to determine the measured diameter of the fused nugget or pullout button for spot welds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

4.6 Packaging inspection. The preservation, packing, and marking of the item shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each wardrobe shall be shipped in a KD condition and preserved method III in accordance with MIL-P-116. Components and hardware shall be cushioned and separately packaged method IC in accordance with MIL-P-116 and placed in the unit container. The unit container can be the shipping container.

5.1.2 Commercial. The wardrobes shall be preserved in accordance with the requirements in ASTM D 3951.

5.2 Packing. Packing shall be levels A, B, or commercial as specified (see 6.2).

5.2.1 Level A. Packing shall be in accordance with the level A requirements in MIL-STD-2073-1. Containers shall be selected from the containers listed in Appendix C, Table VII, MIL-STD-2073-1. Only closed containers shall be used. Case liners are required. Contents shall be cushioned, blocked and braced to prevent movement and damage within the shipping container.

5.2.2 Level B. Level B shall be the same as level A except that case liners are not required.

5.2.3 Commercial. Each wardrobe shall be shipped KD and prepared for shipment in accordance with the requirements in ASTM D 3951.

5.3 Marking. Markings shall be in accordance with the requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The wardrobes covered by this specification are intended for use by unaccompanied military personnel in government quarters.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Type, size, class, and style of wardrobes required (see 1.2.1).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. Issue of document required if other than as specified (see 2.1.1).
e. When first article is required for inspection and approval (see 3.1 and 4.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

f. When wardrobes are to be other than KD condition (see 3.3.2).
g. When towel bars are required (see 3.4.11).
h. When vinyl wall base is required (see 3.4.12).
i. Style and height of wall base, if required (see 3.4.12).
j. Color of wall base if other than as specified (see 3.4.12).
k. When mirrors are required (see 3.4.13).
l. When label holders are required (see 3.4.14).
m. When height or recess of wardrobe base is to be other than as specified (see 3.6.4).
n. When separate or integral base for steel constructed wardrobes is to be specified (see 3.6.4).
o. When the method of finish for steel is to be specified, and the paint colors required (see 3.7.2.3).
p. Color of pigmented coating for particleboard (see 3.7.3).
q. Finish, pattern, and color of decorative laminated plastic sheets (see 3.7.5).
r. Level of preservation and packing required (see 5.1 and 5.2).

6.3 Part or identifying number (PIN). The PIN to be used for wardrobes acquired to this specification are created as follows:

M28581 - 1 A 1 A T W M L

Document identifier
Type
Size
Class
Style
Towel bar
Wall base
Mirror
Label holder

The above PIN is for a Type I (open wardrobe), Size A (36 inches wide), Class 1 (8 feet high with hatshelf), Style A (three door) wardrobe with a towel bar, wall base, mirror and label holder (see table I).

TABLE I. PIN designators.

	Type		Size		Class		Style		Towel bar		Wall base		Mirror		Label Holder	
	I	II	A	B	1	2	A	B	Reqd	Not reqd	Reqd	Not reqd	Reqd	Not reqd	Reqd	Not reqd
PIN Designator	1	2	A	B	1	2	A	B	T	X	W	X	M	X	L	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

6.4 First article. When a first article inspection is required, the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of (one), (two), etc. unit(s). The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.5 Towel bar mounting. When two wardrobes are installed side-by-side in a corner, where only one side of the two wardrobes is accessible, two towel bars may be installed on the one accessible side. The towel bars should be installed one above the other, spaced to permit the draping of a standard bath towel over each bar without contacting each other or the floor.

6.6 Vinyl wall base. Style A vinyl wall base is for use with carpeted floors. Style B vinyl wall base is for use with resilient tile floors.

6.7 Installation conditions. Paragraphs 6.7.1 through 6.7.1.5 specify installation details to cover average conditions. However, layout and installation conditions will vary from project to project and may vary within a single project.

6.7.1 Installation information. The wardrobes should be leveled. Except for "island type" installations, all wardrobes should be secured to the wall in accordance with 6.7.1.1. "Island type" installations should be secured to the floor in accordance with 6.7.1.2. In addition to wall or floor fastening, all side-by-side units should be secured as specified in 6.7.1.3. Back-to-back units should be secured together as specified in 6.7.1.4 and fastened to the floor. All methods of installation and fasteners to be used should be approved by the Resident Officer-In-Charge of Construction or other designated authority prior to commencing installation. When type II wardrobes are specified, scribing in accordance with 6.7.1.5 should be provided.

6.7.1.1 Wall installation. Each wardrobe should be secured to the wall with not less than four fasteners appropriate for use with the type of wall construction. One fastener should be installed near each top and bottom corner. Particleboard wardrobes should be fastened through the back panel. Steel wardrobes should be secured through the back at points where the fasteners will pierce two thicknesses of steel at the top as shown on figure 18. In all cases, fasteners should be located on the wardrobe back as close to the sides as practicable.

6.7.1.2 Floor installation. Wardrobes in "island type" installations should be secured to the floor with not less than four fasteners appropriate for use with the type of floor construction. Wood bases should be fastened through installation angles as shown on figures 12 and 13. Steel wardrobes should be fastened through flanges or channels as shown on figures 22 and 23. Exposed backs require additional fasteners (see 3.6.2.2) and should be painted the same color as sides (see 3.7.3).

6.7.1.3 Side-by-side installation. Side-by-side wardrobes should be secured together with three through bolts and cap nuts (particleboard option) or sheet metal screws (steel option) as shown on figures 17 and 25. Fastening should be

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

at top, bottom, and center. Common sides between side-by-side installations are not acceptable. Adjacent frame members should meet flush for the full height of the wardrobes.

6.7.1.4 Back-to-back installation. Back-to-back wardrobes should be secured together with bolts and cap nuts at four points. All fastener location details should be the same as for wall installation (see 6.7.1.1) except that the two lower fasteners should be located approximately midway between the intermediate bottom and the bottom. A common back between back-to-back wardrobes is not acceptable.

6.7.1.5 Scribing. When type II wardrobes are specified, the area above the units should be enclosed by scribing to the ceiling and wall as shown on figures 18, 20, 21, 26 and 27. Particleboard units that require scribing over 8 inches high should have a shadow line reveal top and bottom; scribing less than 8 inches high should be a recessed, continuous strip, extending from the wardrobe top to the ceiling. All facing strips should be particleboard, on solid wood braces, blocking, and backing strips. Scribing for steel units should be recessed, continuous flanged steel strips. Scribing over 14 inches should be secured to the ceiling through the scribing flanges.

6.7.1.5.1 Scribing color. Select color for the scribing, when specified. Flat-panel scribing in black or similar dark colors may be too heavy in appearance, particularly in high ceiling rooms that require large scribing panels. Lighter colors are indicated for this condition.

6.8 Steel component colors. Specify paint colors for steel front frame, back, sides and horizontal components. Only one color should be specified for each individual component. For example, the color specified for exterior surfaces of sides, front frame or back should also be specified for the surfaces of the same component exposed to the wardrobe interior. Since the back frame is formed integrally with the back, front frame and back should be the same color. Where a lighter interior is desired, specify a light color for the horizontal parts (top, bottom, intermediate bottom and hatshelf).

6.9 Sampling procedures. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for a complete reinspection. Resubmitted lots should be reinspected using tightened inspection. If the rejected lot was screened, reinspection should be limited to the defect causing rejection. If the lot was reprocessed, reinspection should be performed for all defects. Rejected lots should be separate from new lots, and should be clearly identified as reinspected lots.

6.9.1 Sampling for examination. Recommended Inspection Level is II and Acceptable Quality Level is 2.5.

6.9.2 Sampling for tests. Recommended Inspection Level is S-4 and Acceptable Quality Level is 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

6.10 Subject term (key word) listing.

Cabinet
Closet
Clothes rod
Laminated plastic
Laminated wood
Mirror
Particleboard
Plywood
Storage
Towel bar

6.11 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Navy - YD1
Air Force - 99

Review Activities:
Navy - MC
Air Force - 84

Preparing Activity:
Navy - YD1

(Project 7105-0257)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

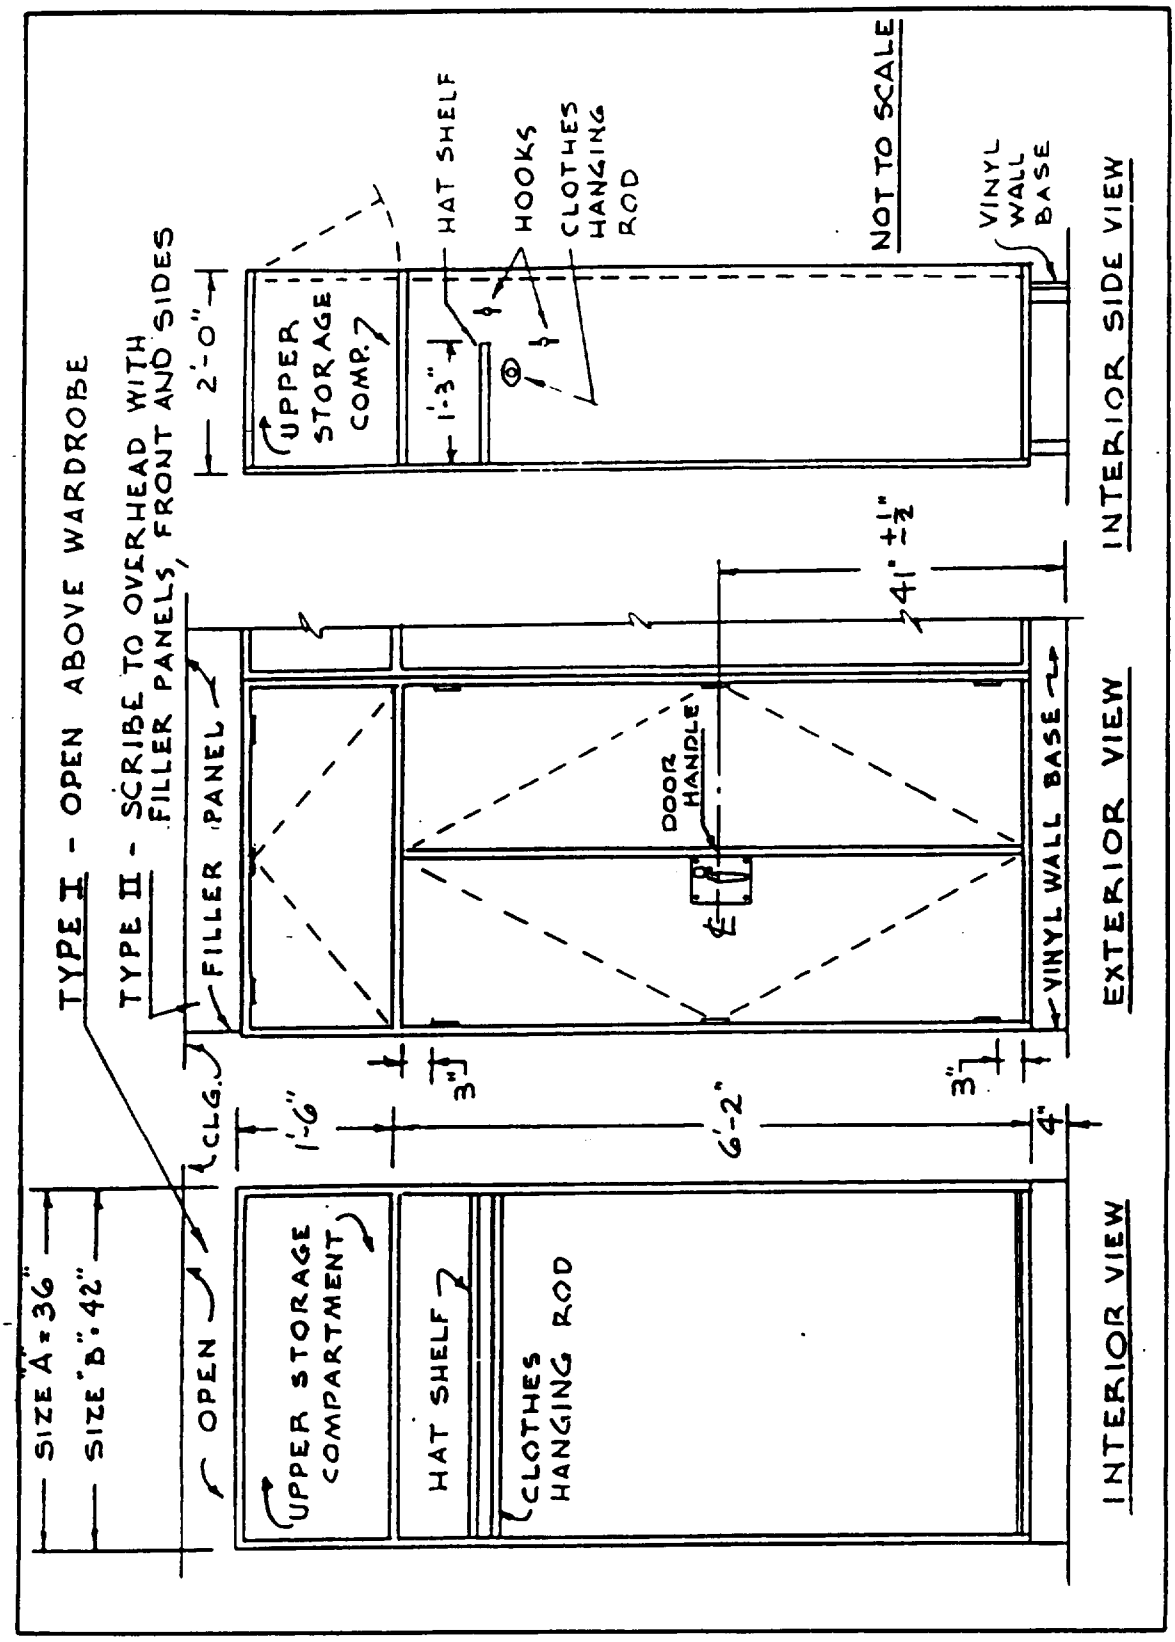


FIGURE 1. Class 1, style A, wardrobe elevations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

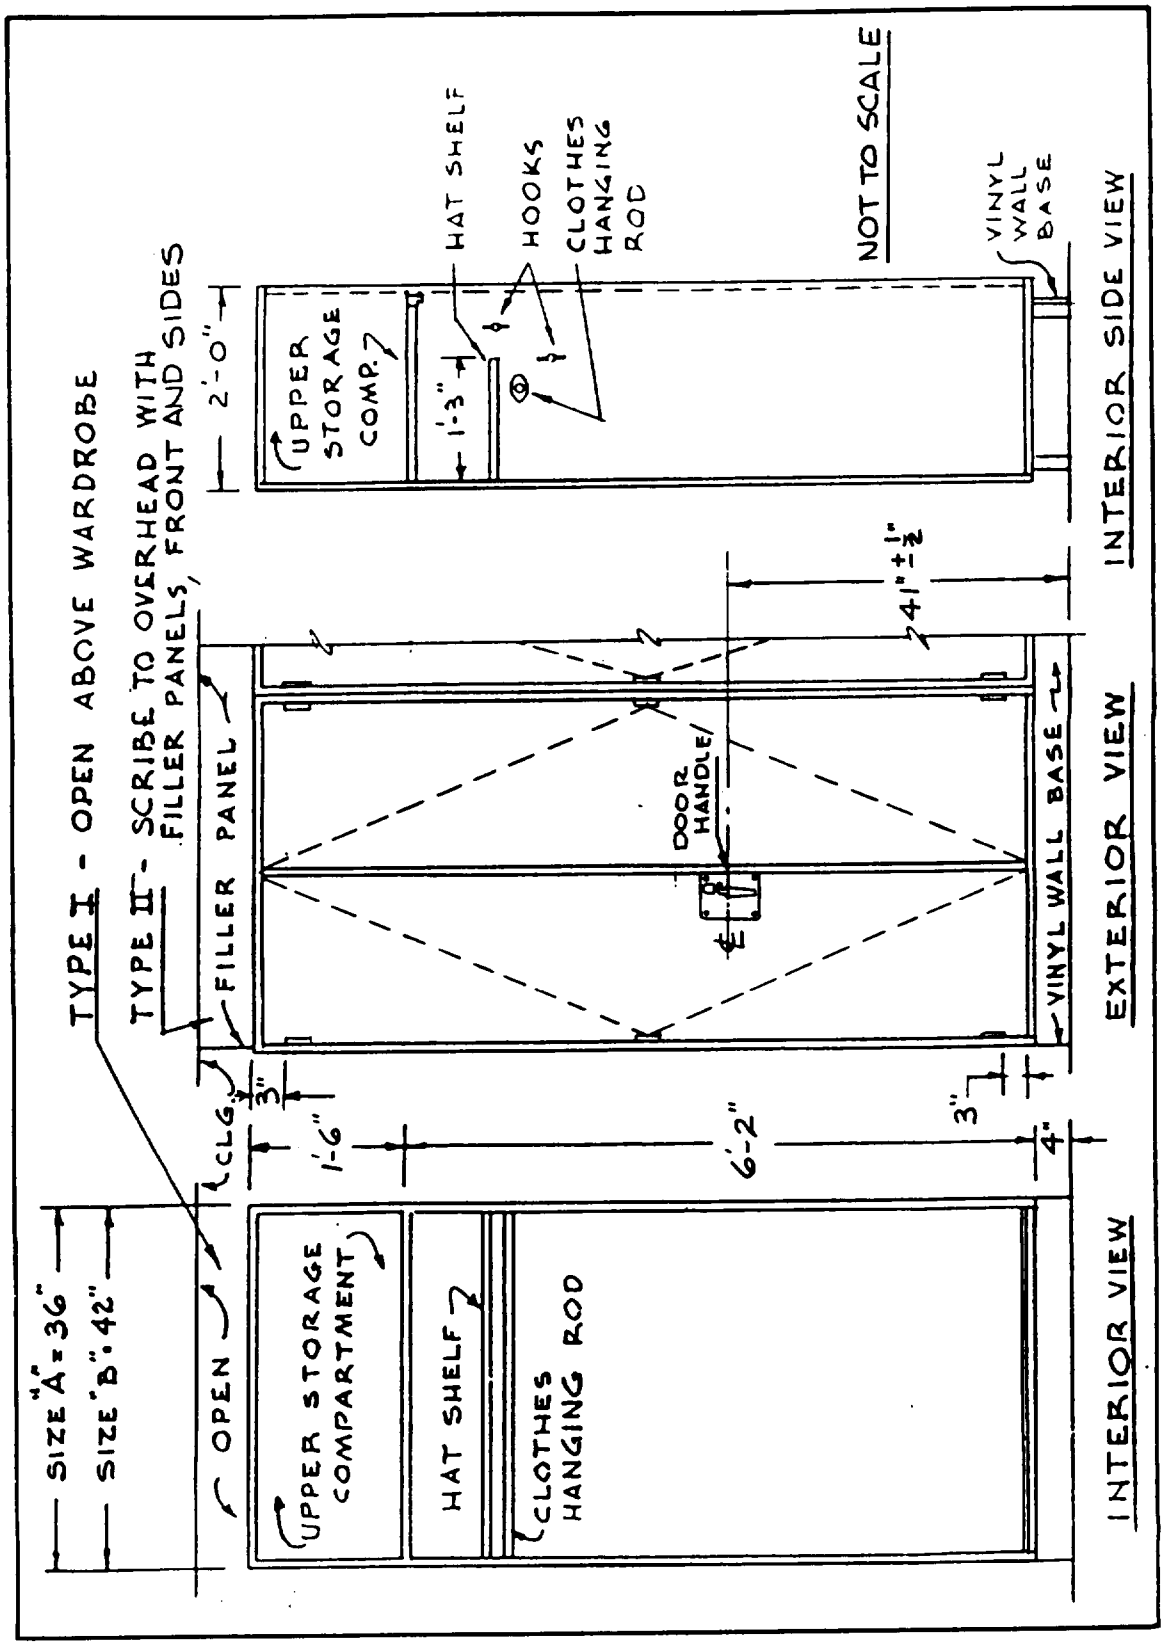


FIGURE 2. Class 1, style B, wardrobe elevations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

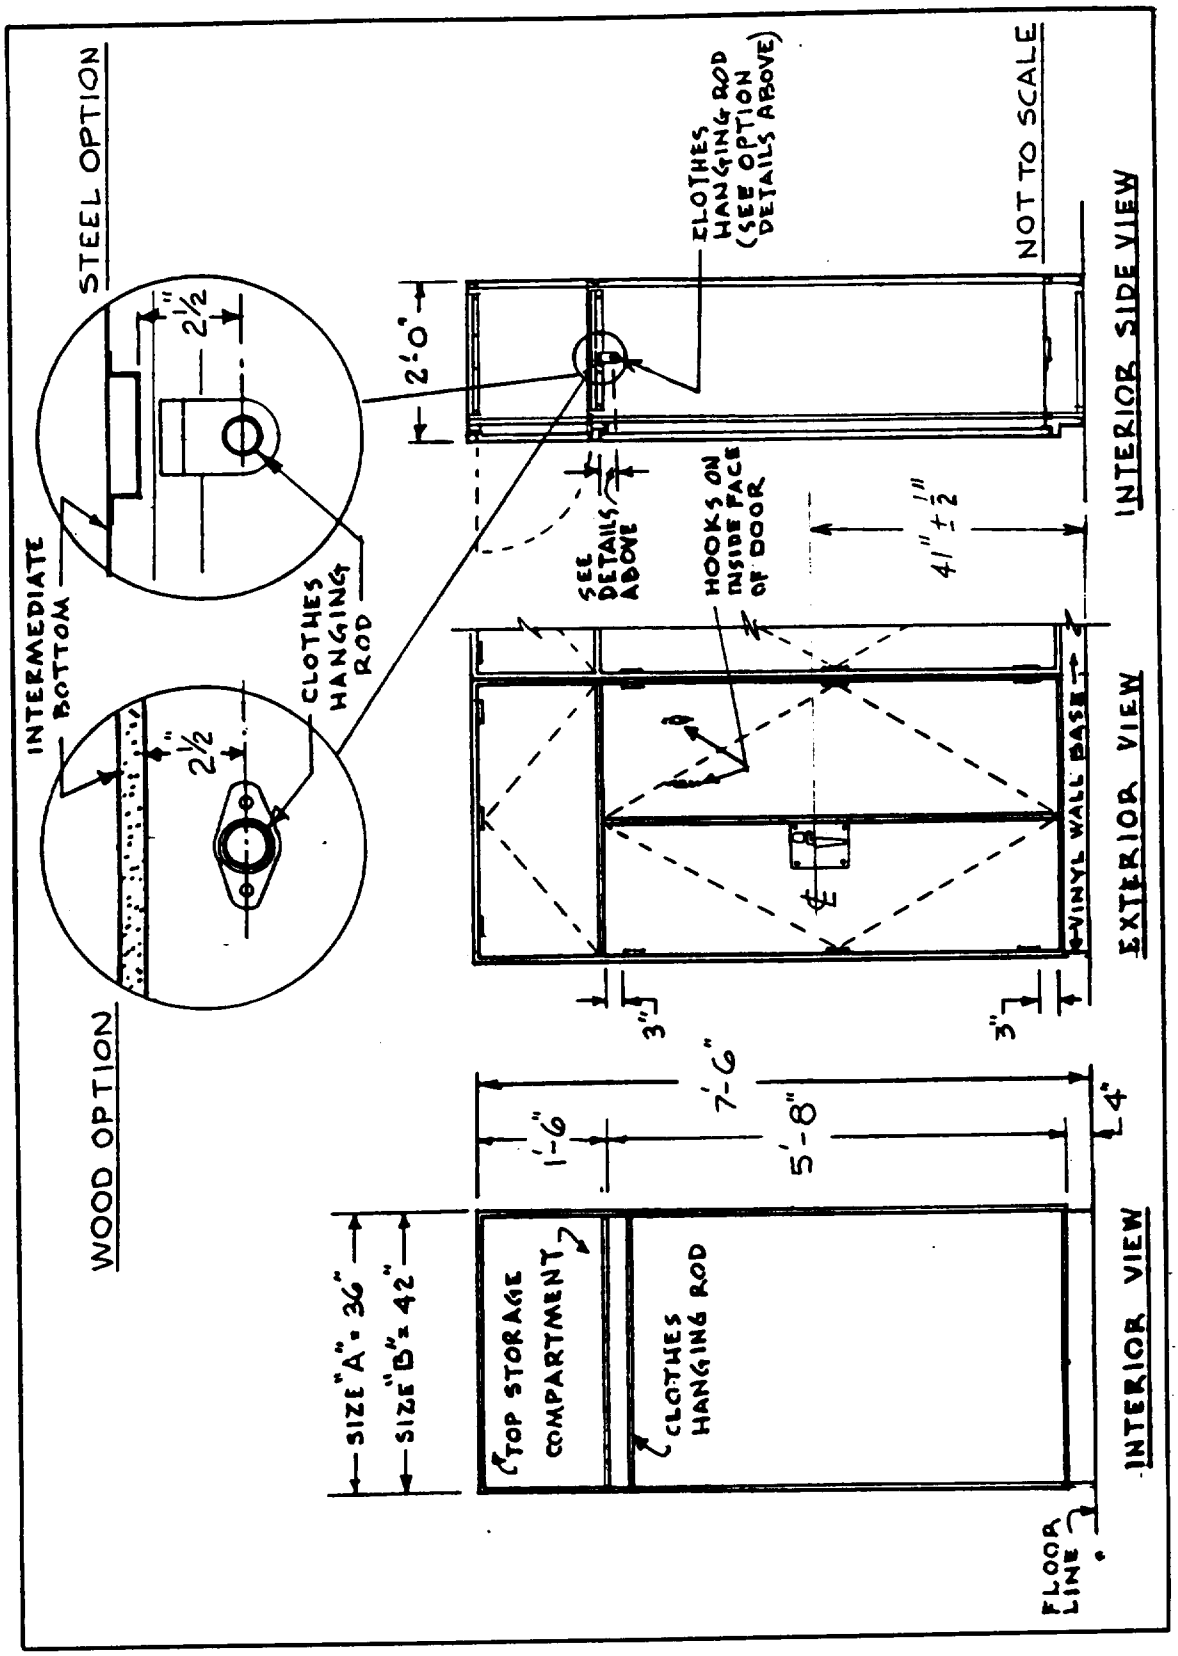


FIGURE 3. Class 2, style A, wardrobe elevations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

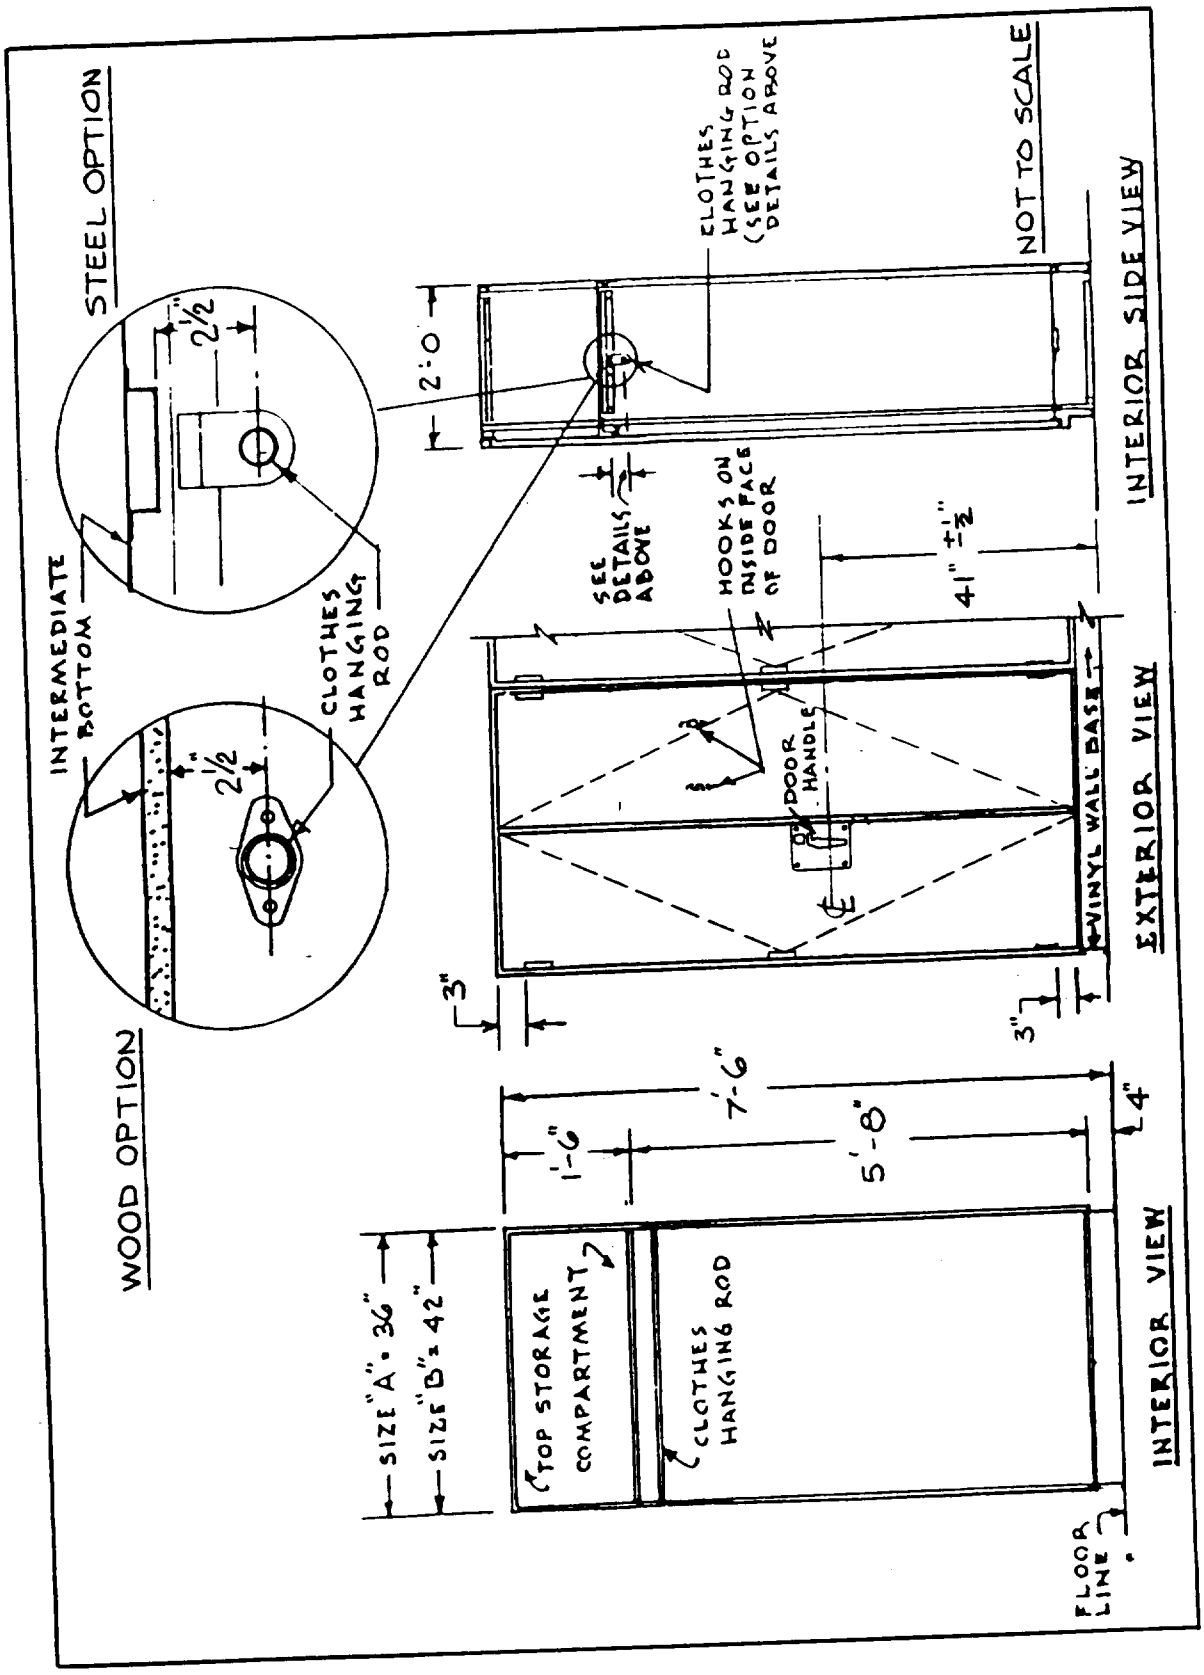


FIGURE 4. Class 2, style B, wardrobe elevations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

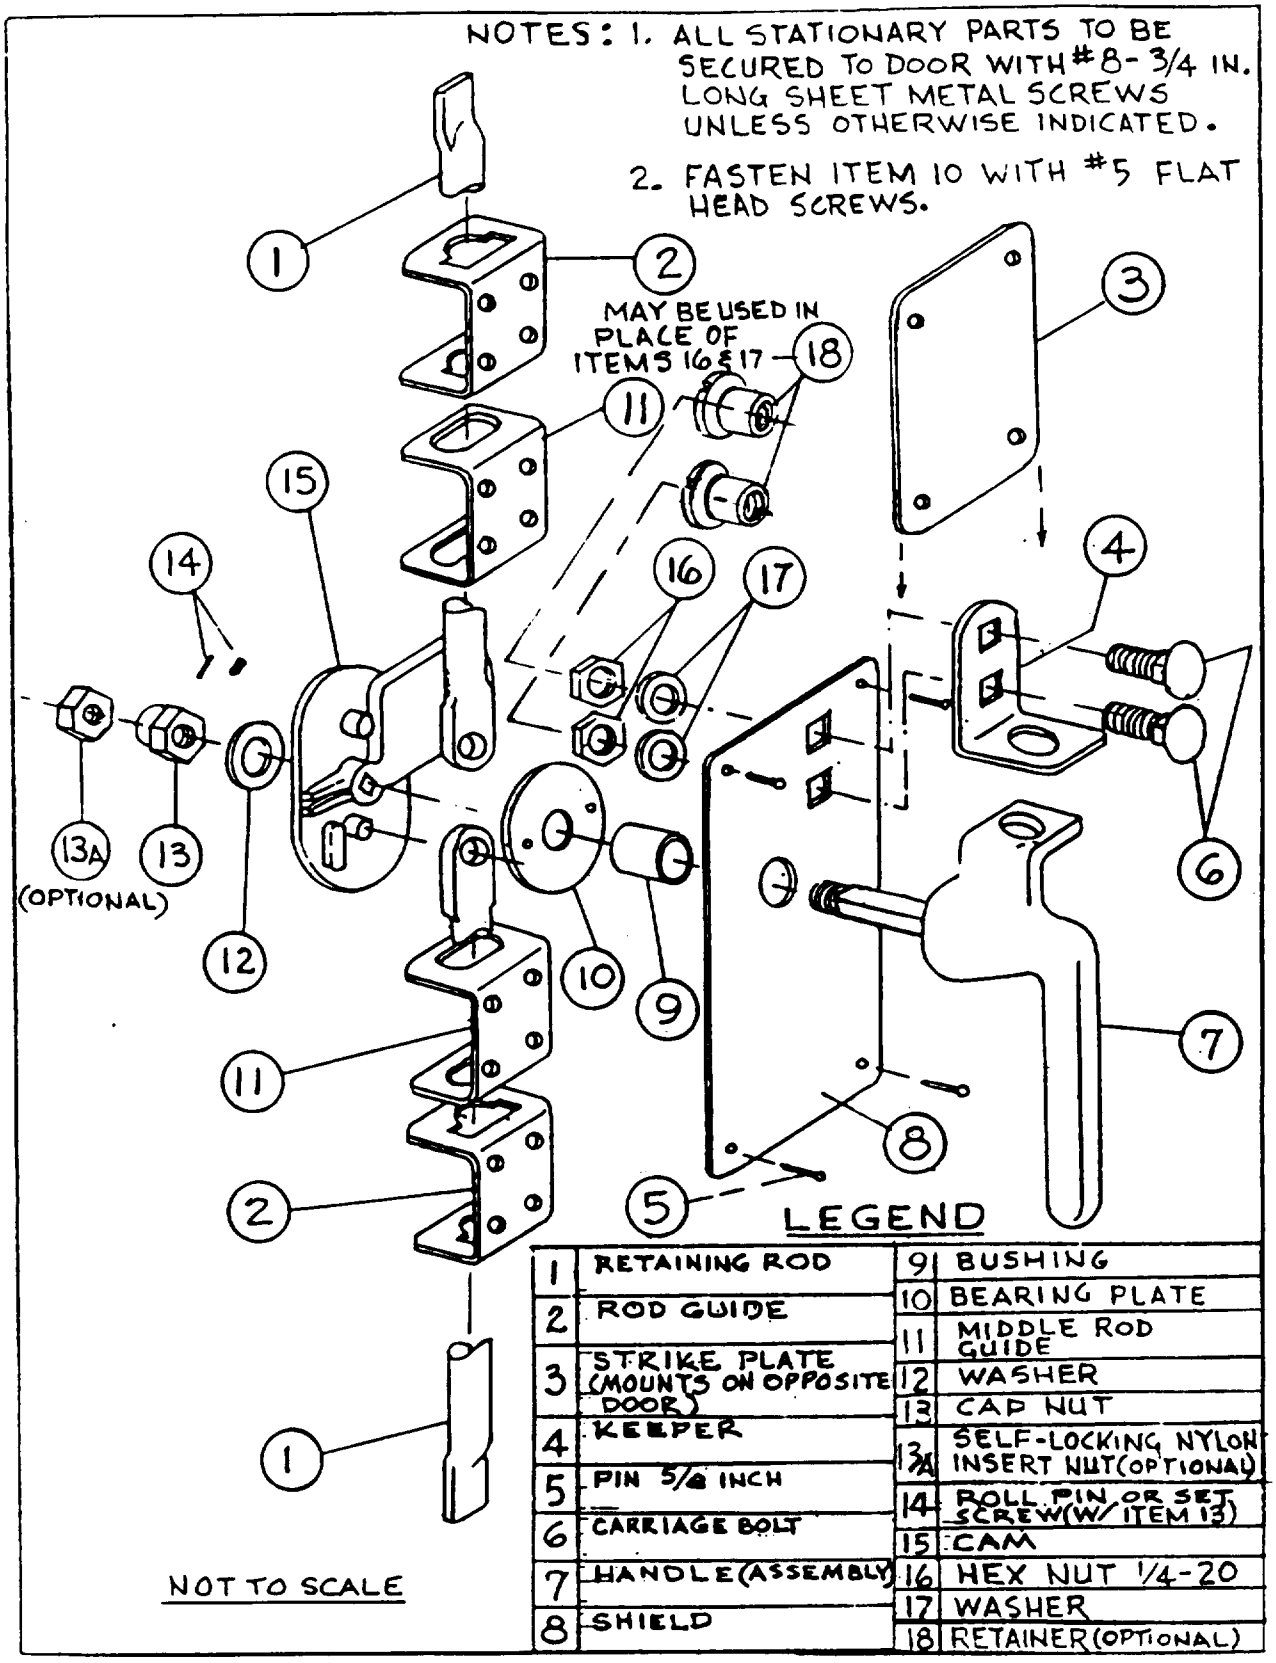


FIGURE 5. **Wardrobe door locking assembly.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

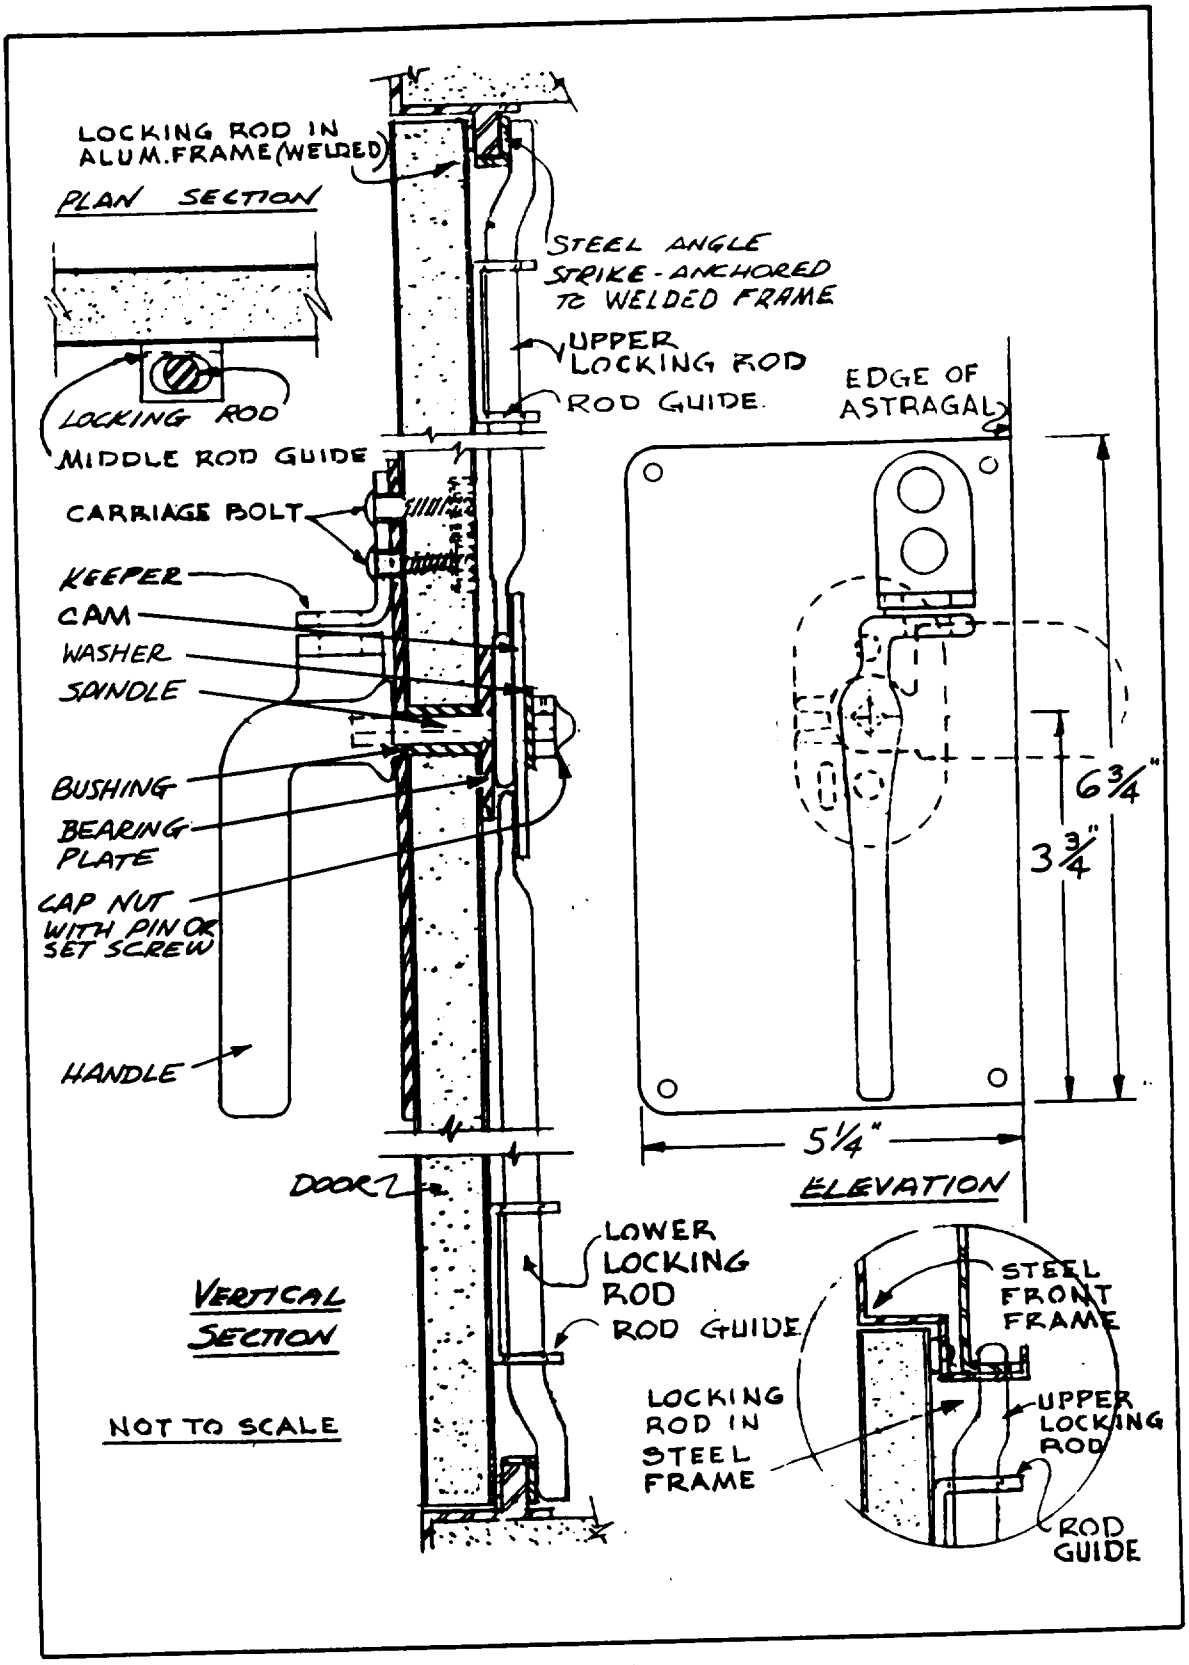


FIGURE 6. Door handle assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

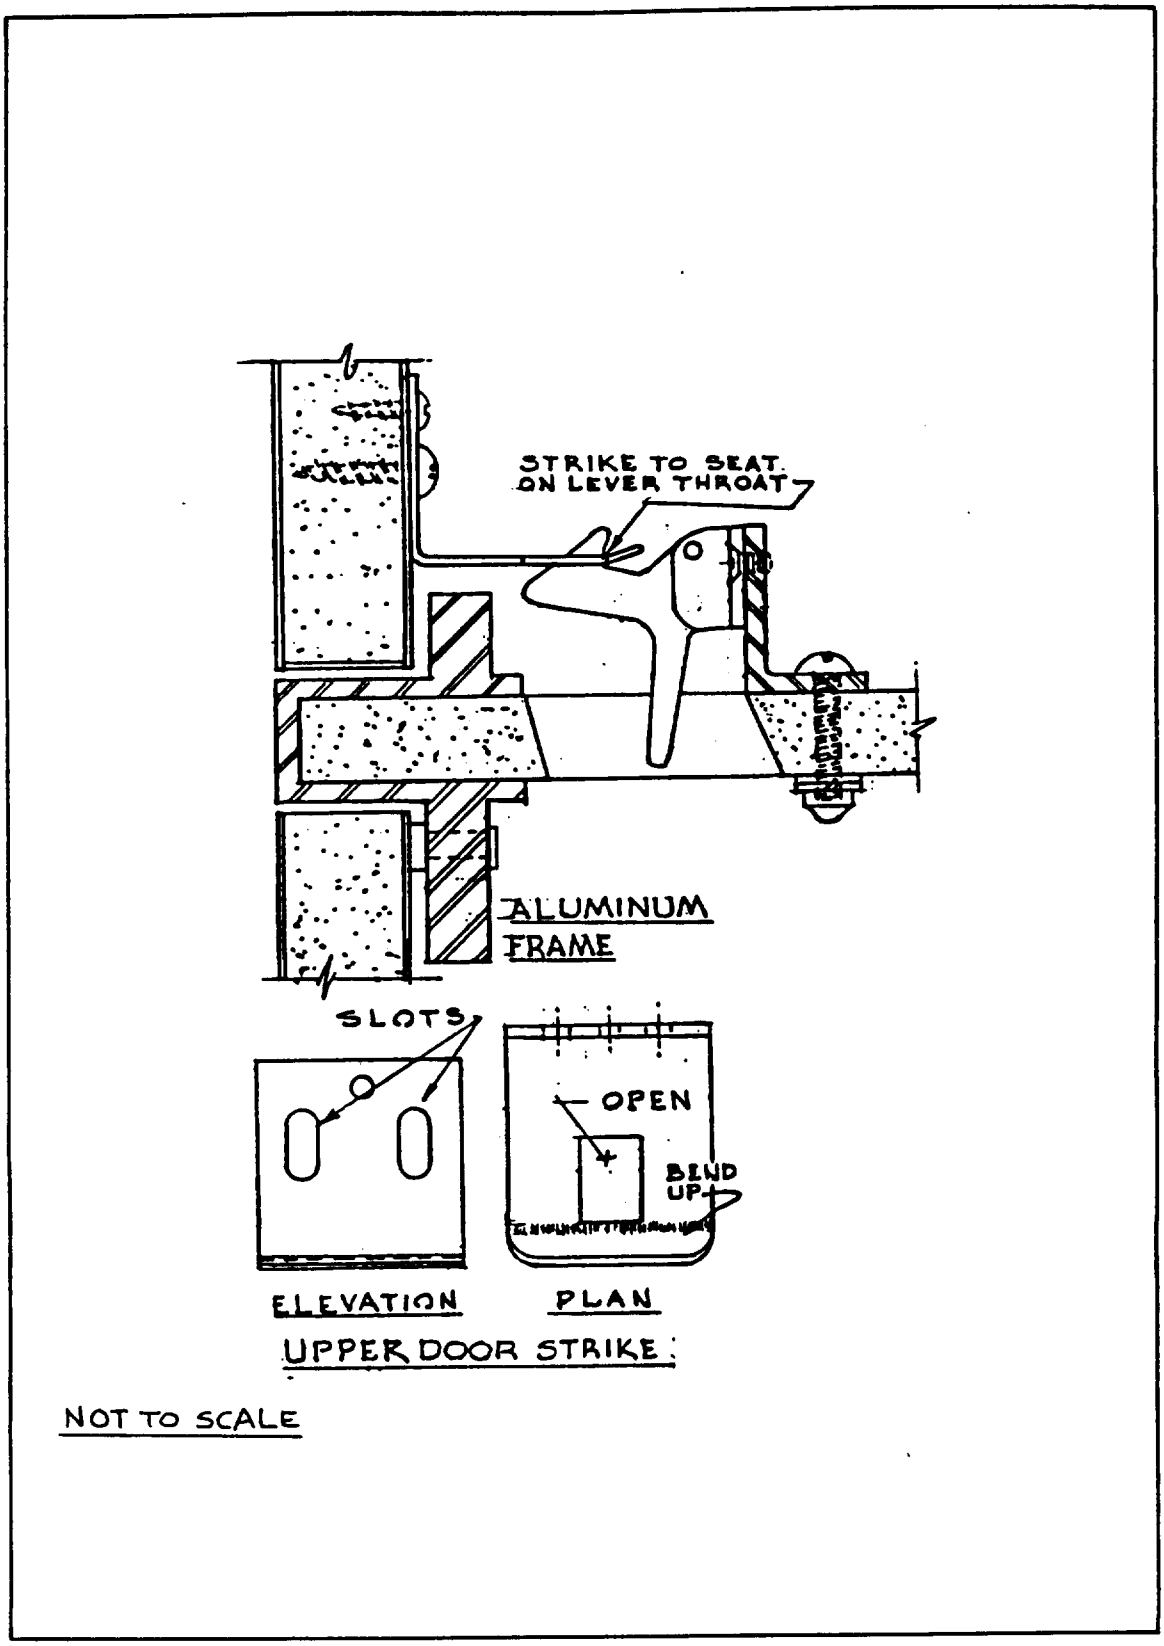


FIGURE 7. Elbow catch, style A, aluminum frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

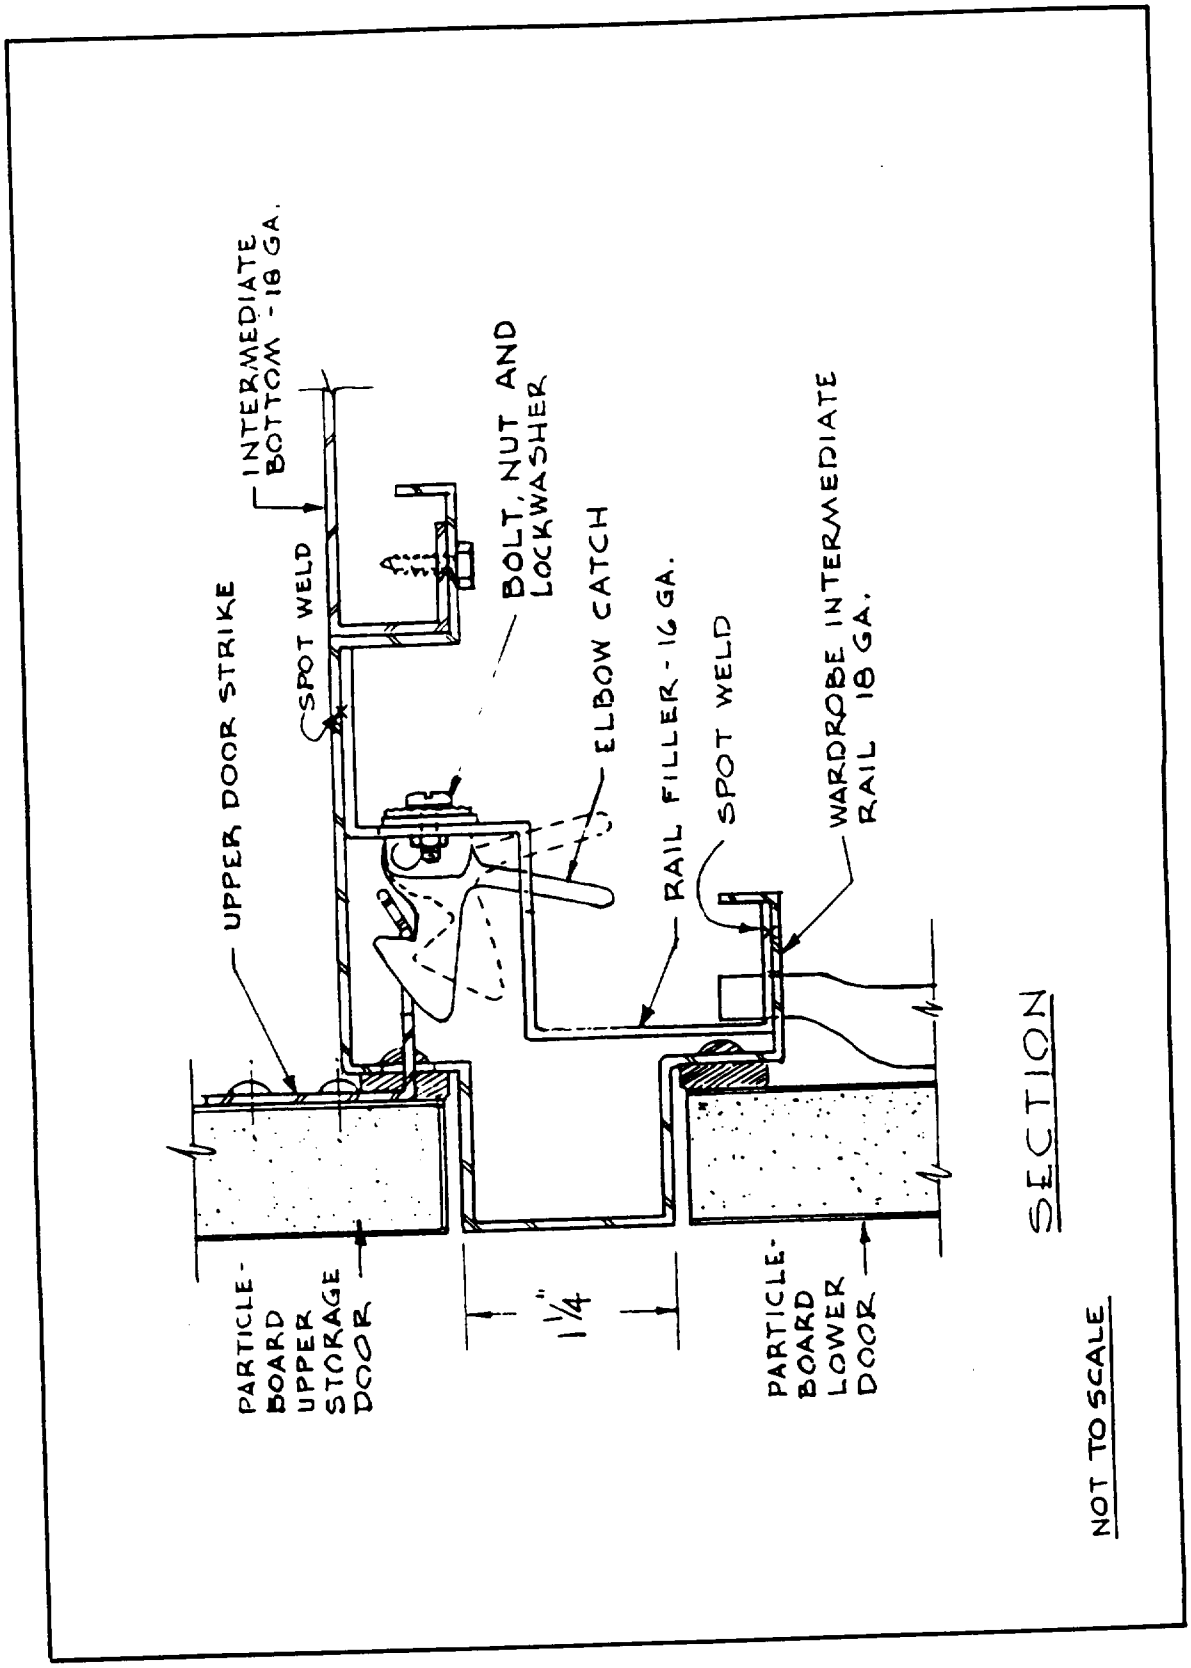


FIGURE 8. Elbow catch, style A, steel frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

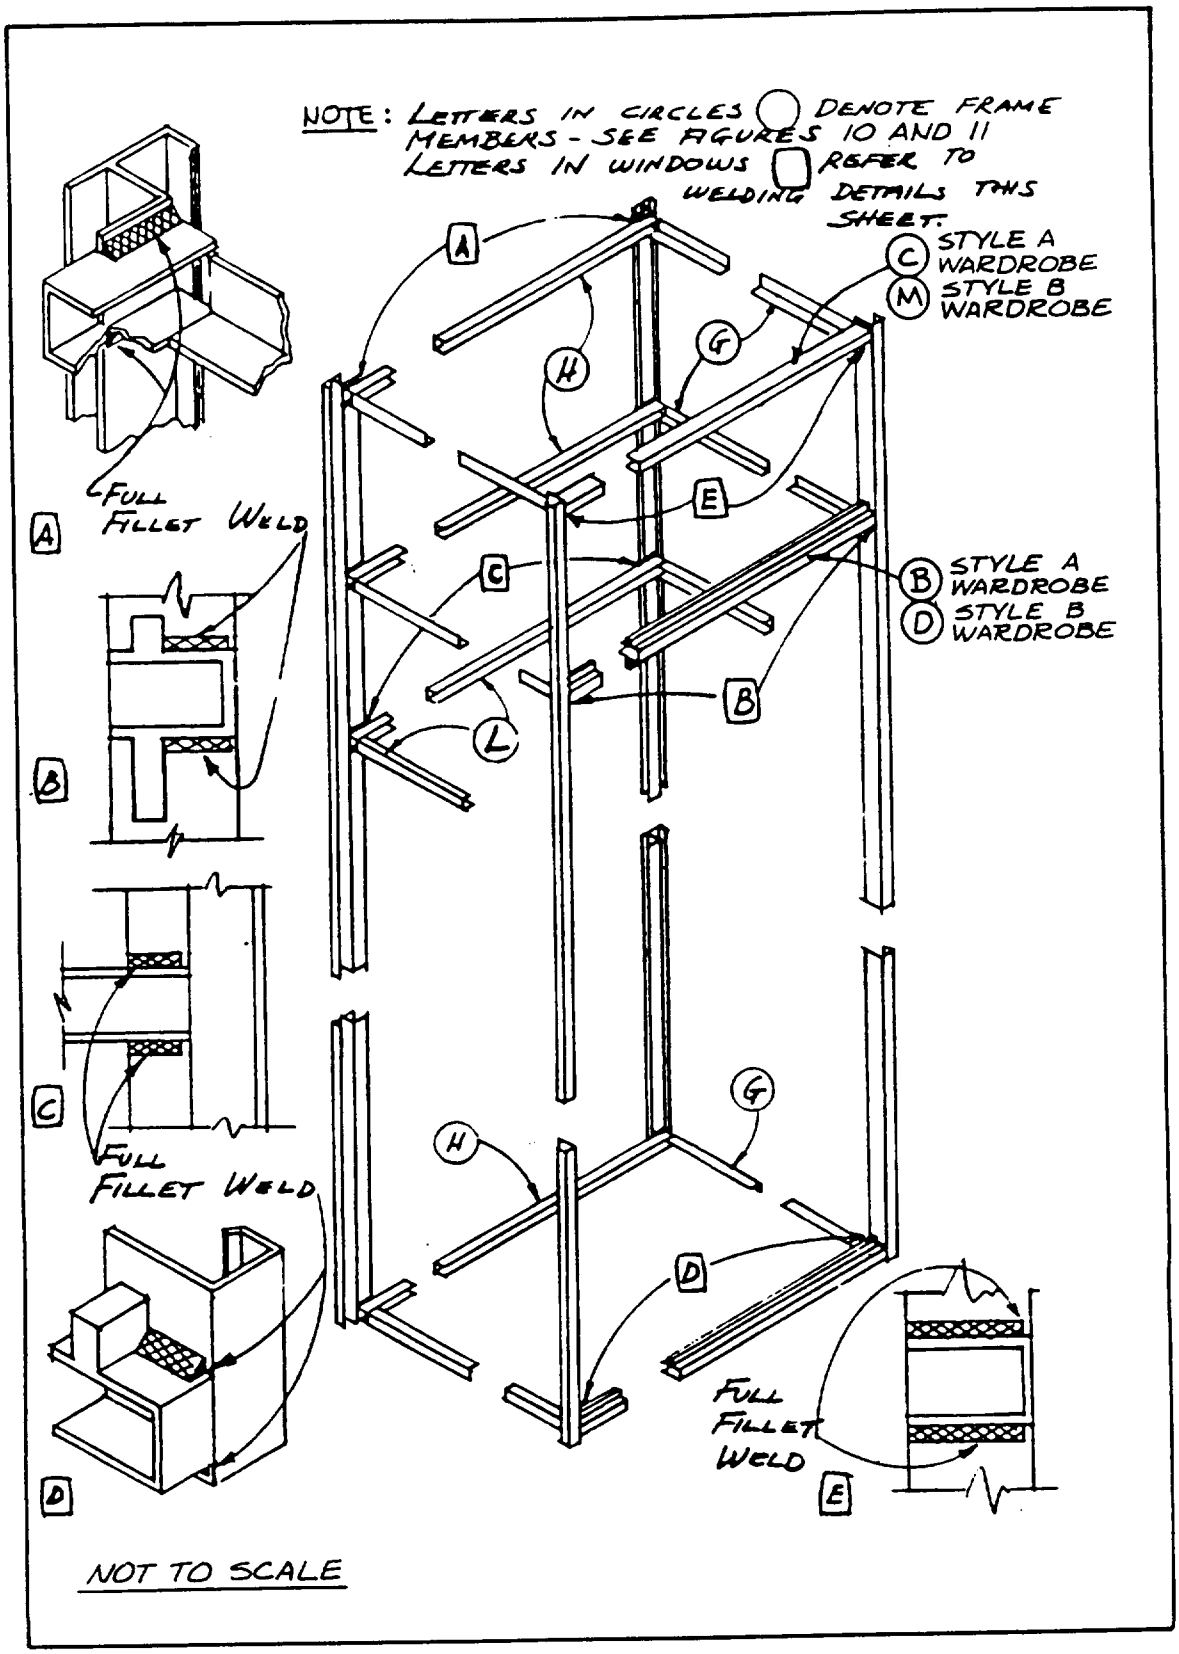


FIGURE 9. Welded aluminum wardrobe frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

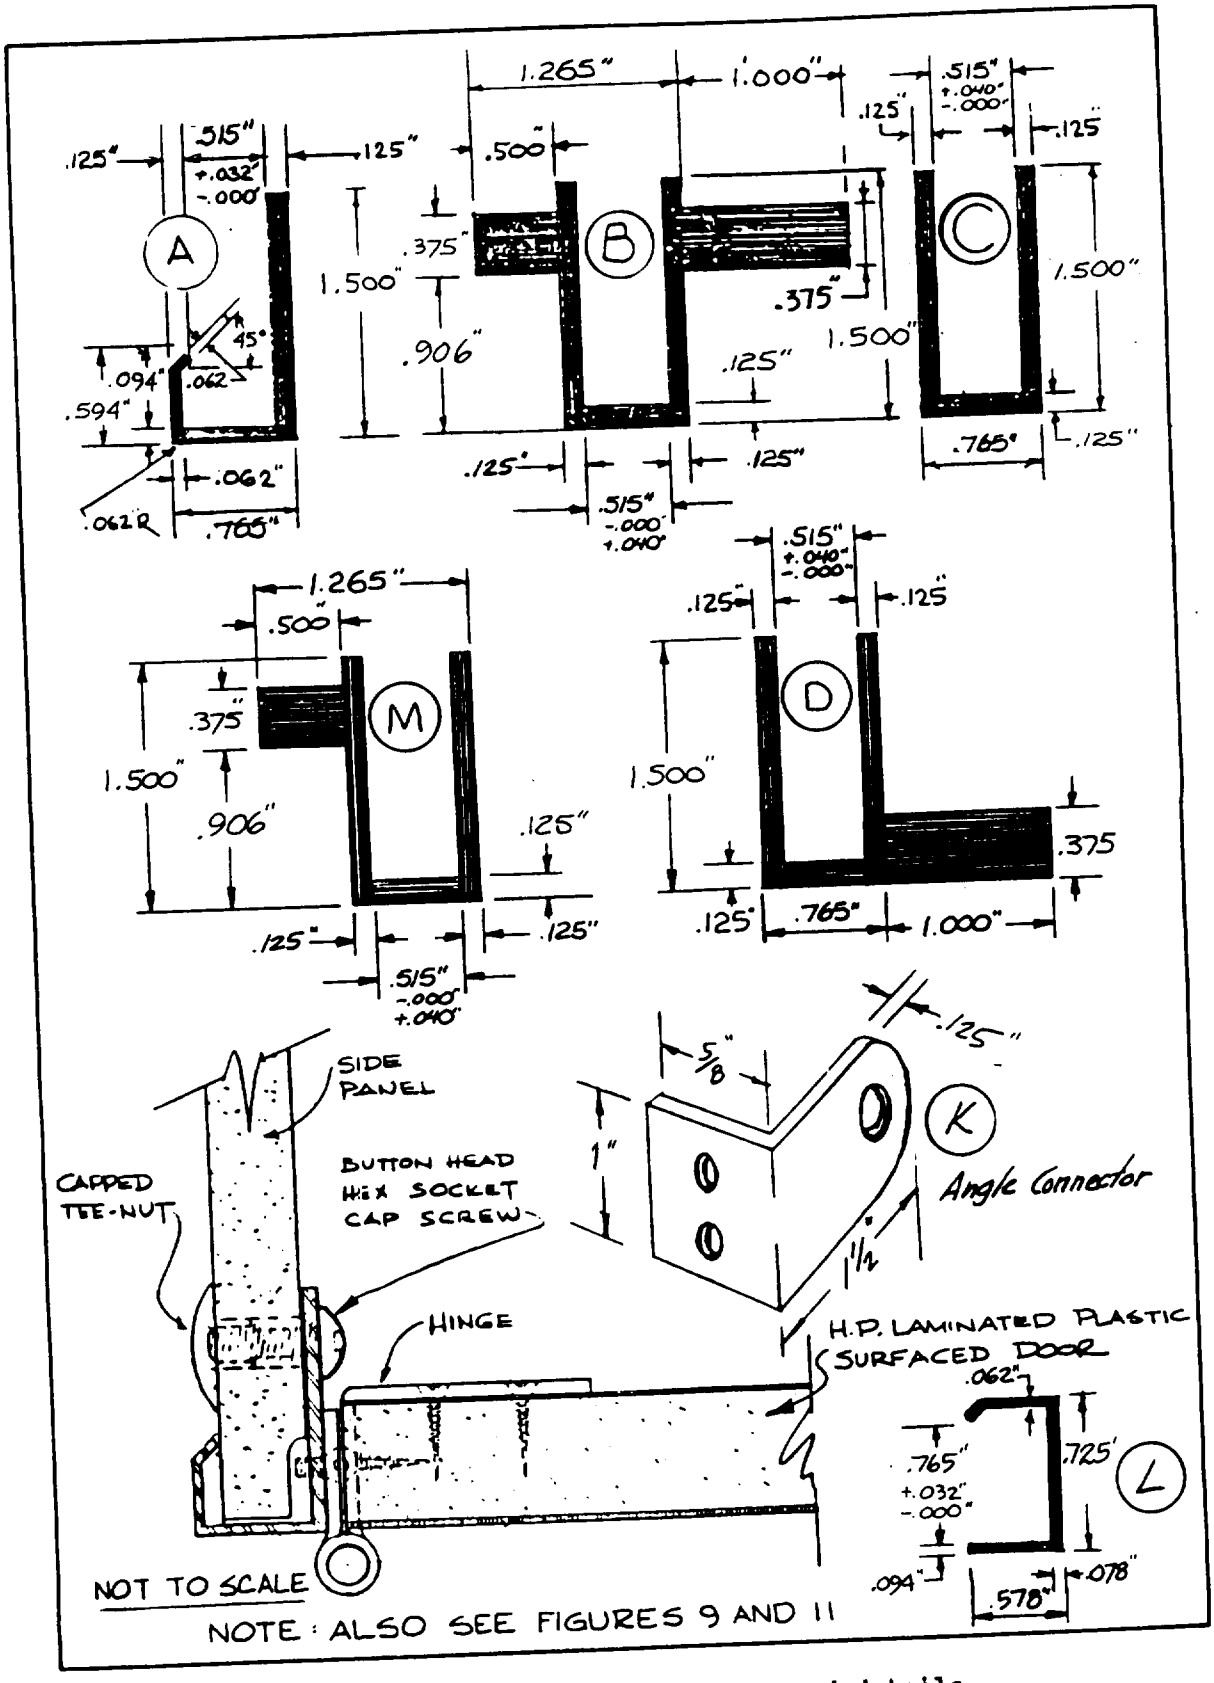


FIGURE 10. Aluminum extrusions and details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

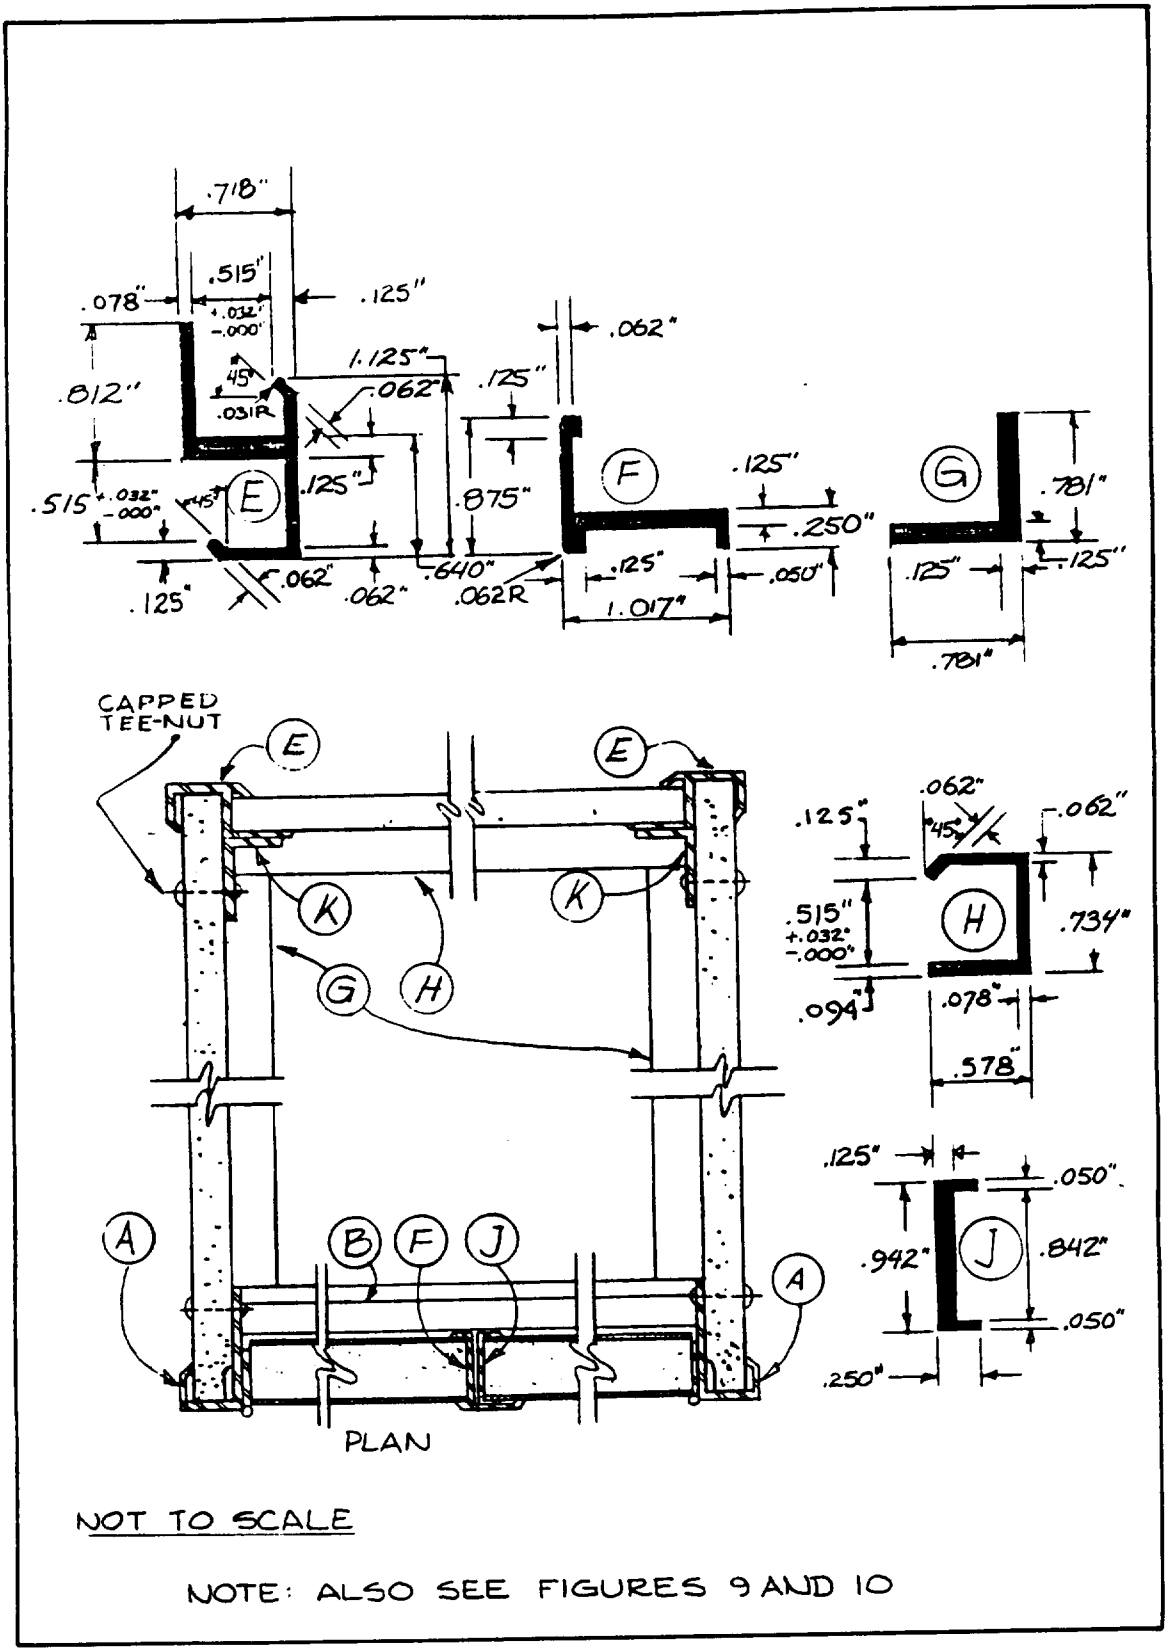


FIGURE 11. Aluminum extrusions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

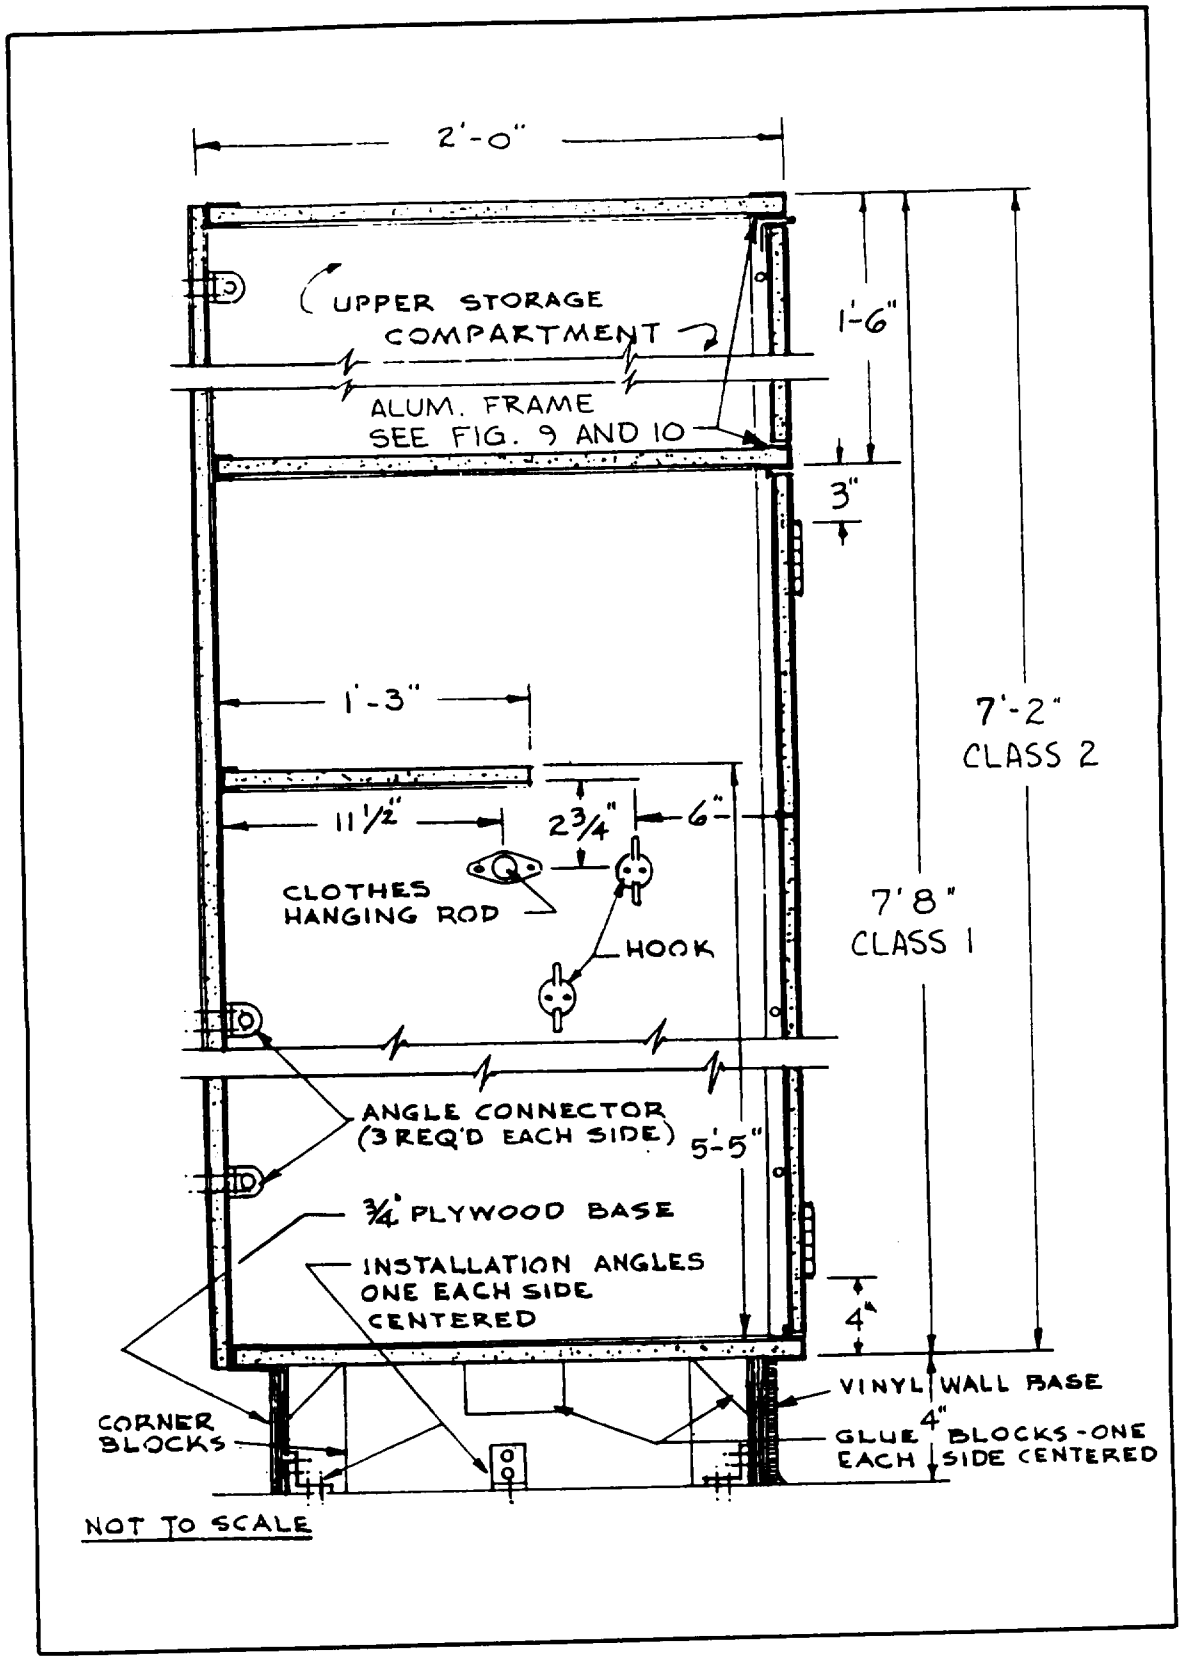


FIGURE 12. Style A wardrobe, particleboard with separate base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

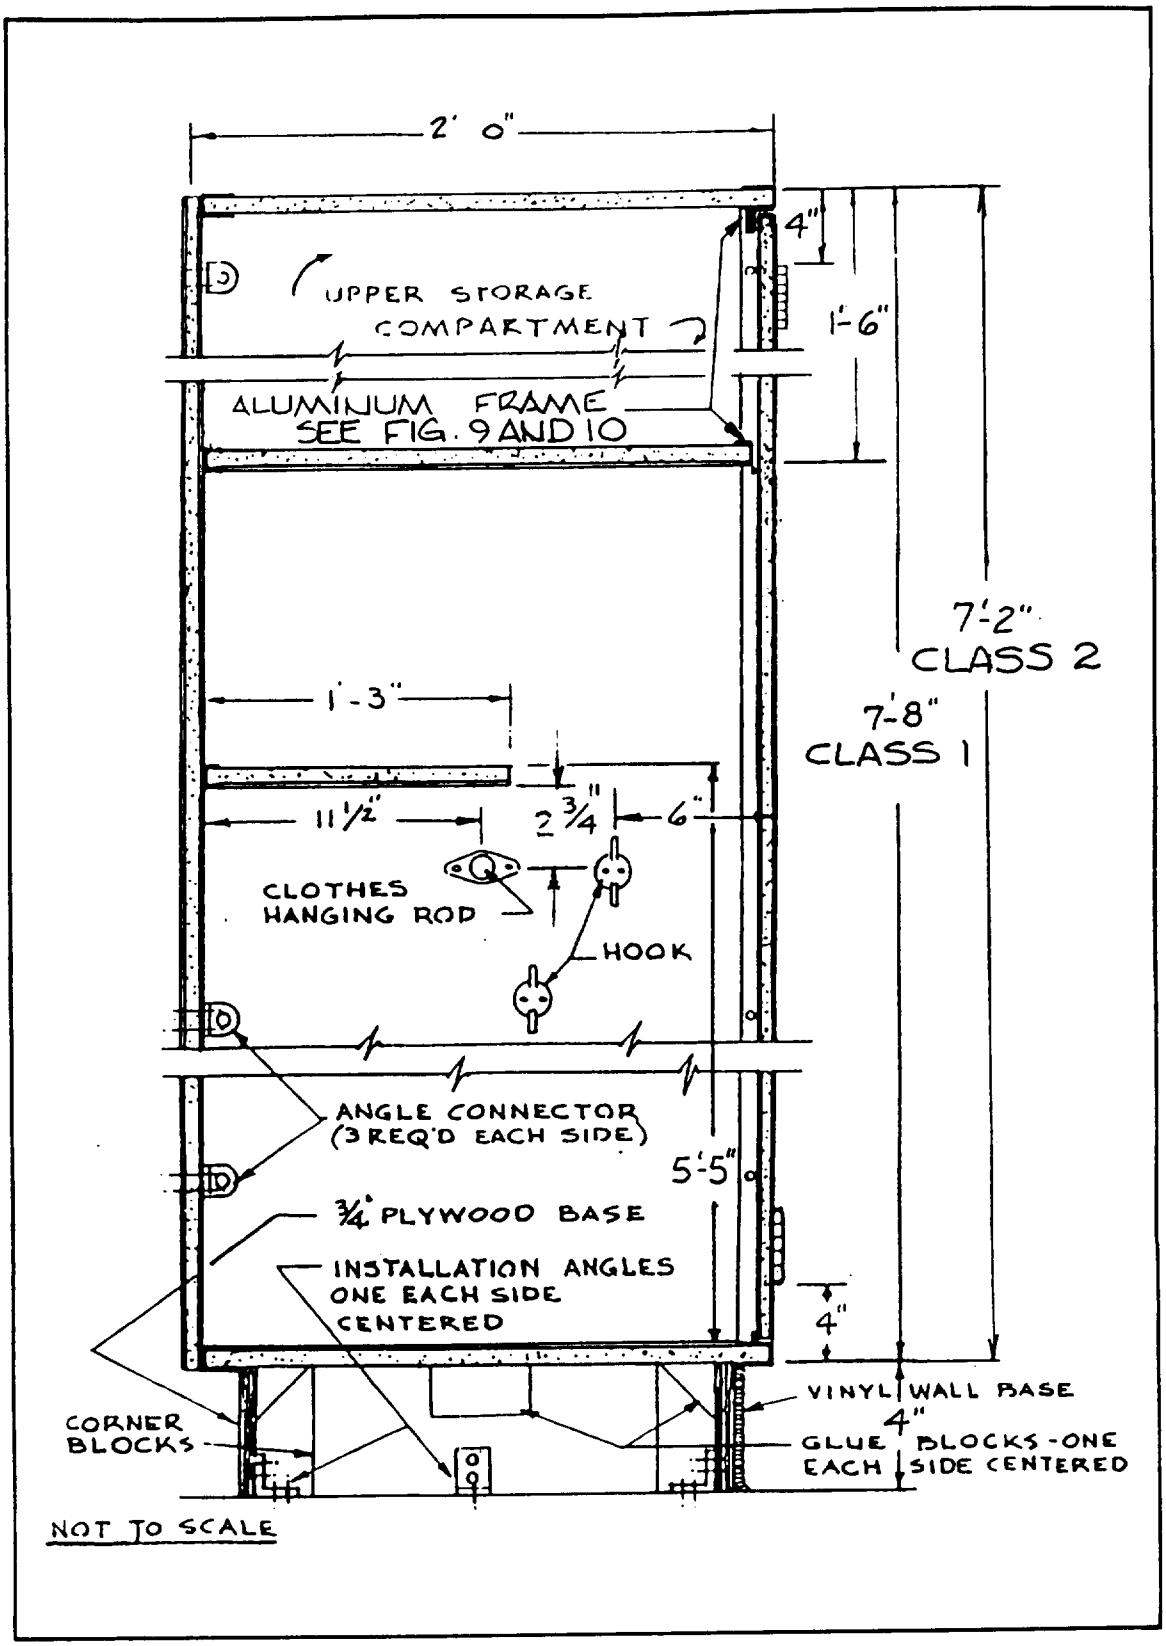


FIGURE 13. Style B wardrobe, particleboard with separate base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

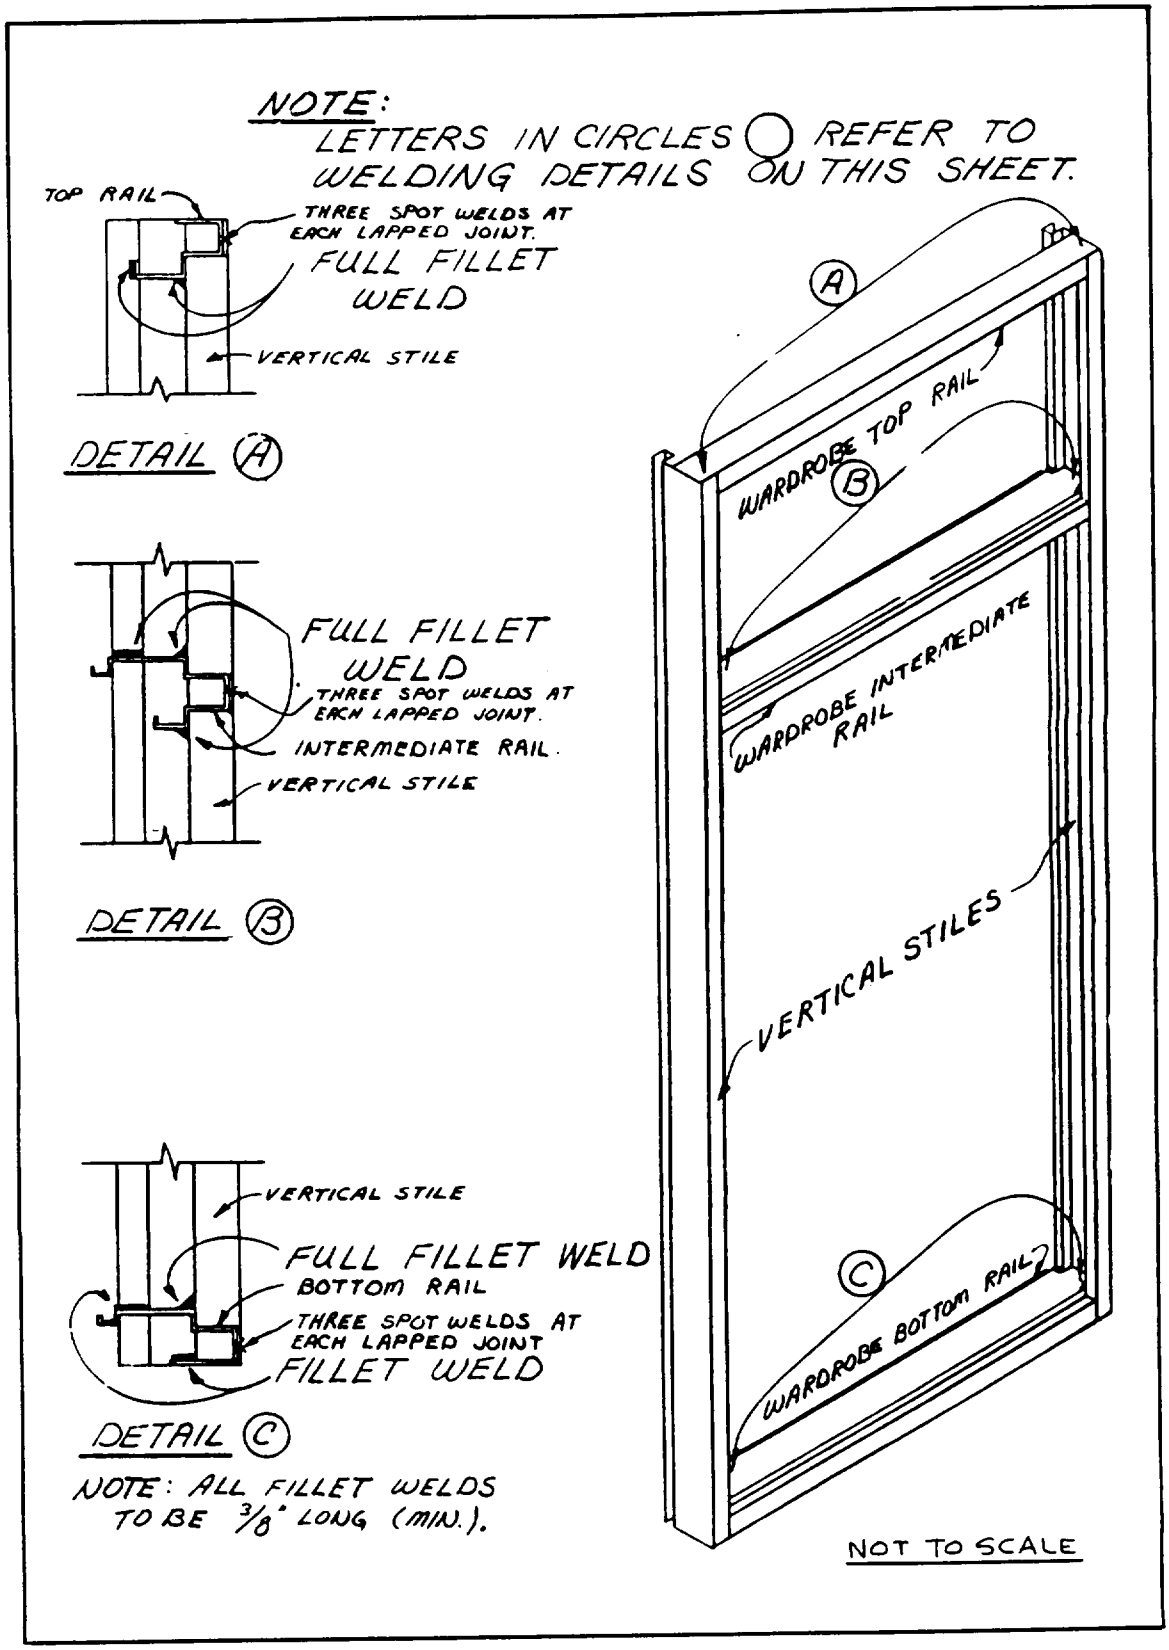


FIGURE 14. Style A wardrobe frame, welded steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

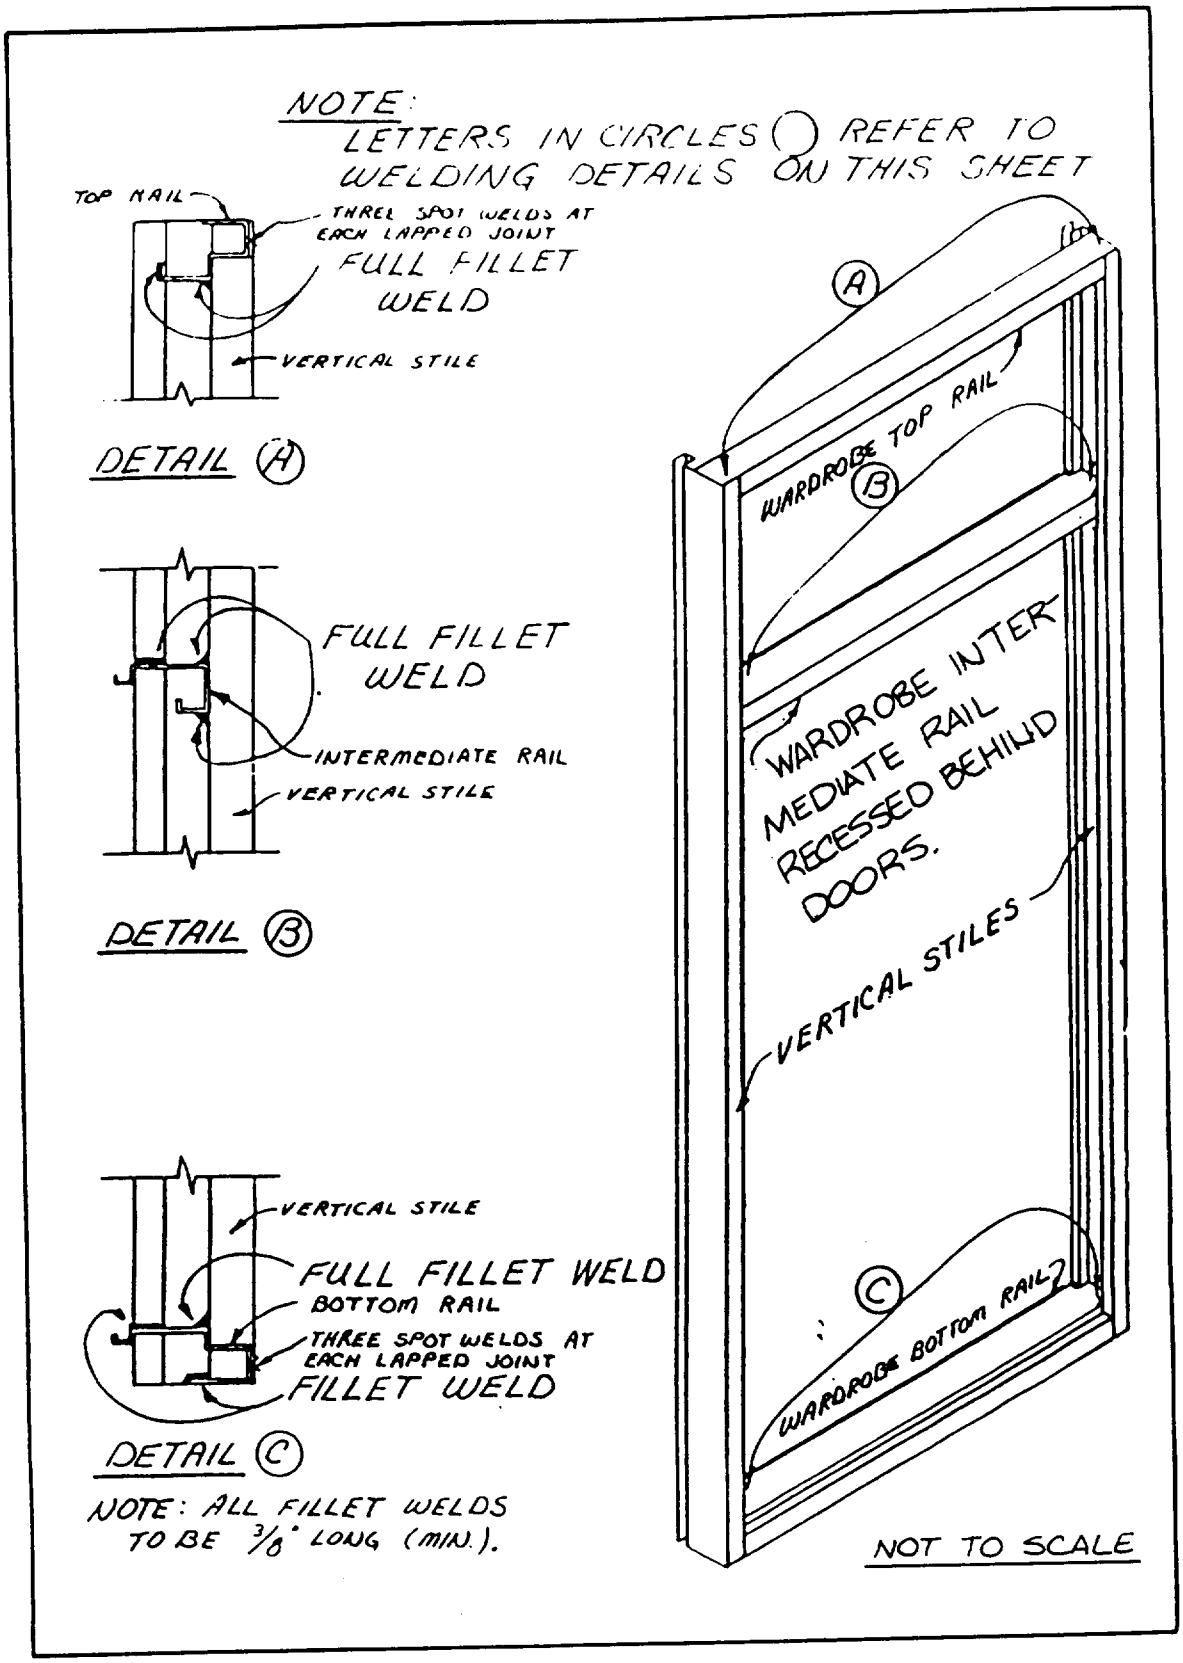


FIGURE 15. **Style B wardrobe frame, welded steel.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

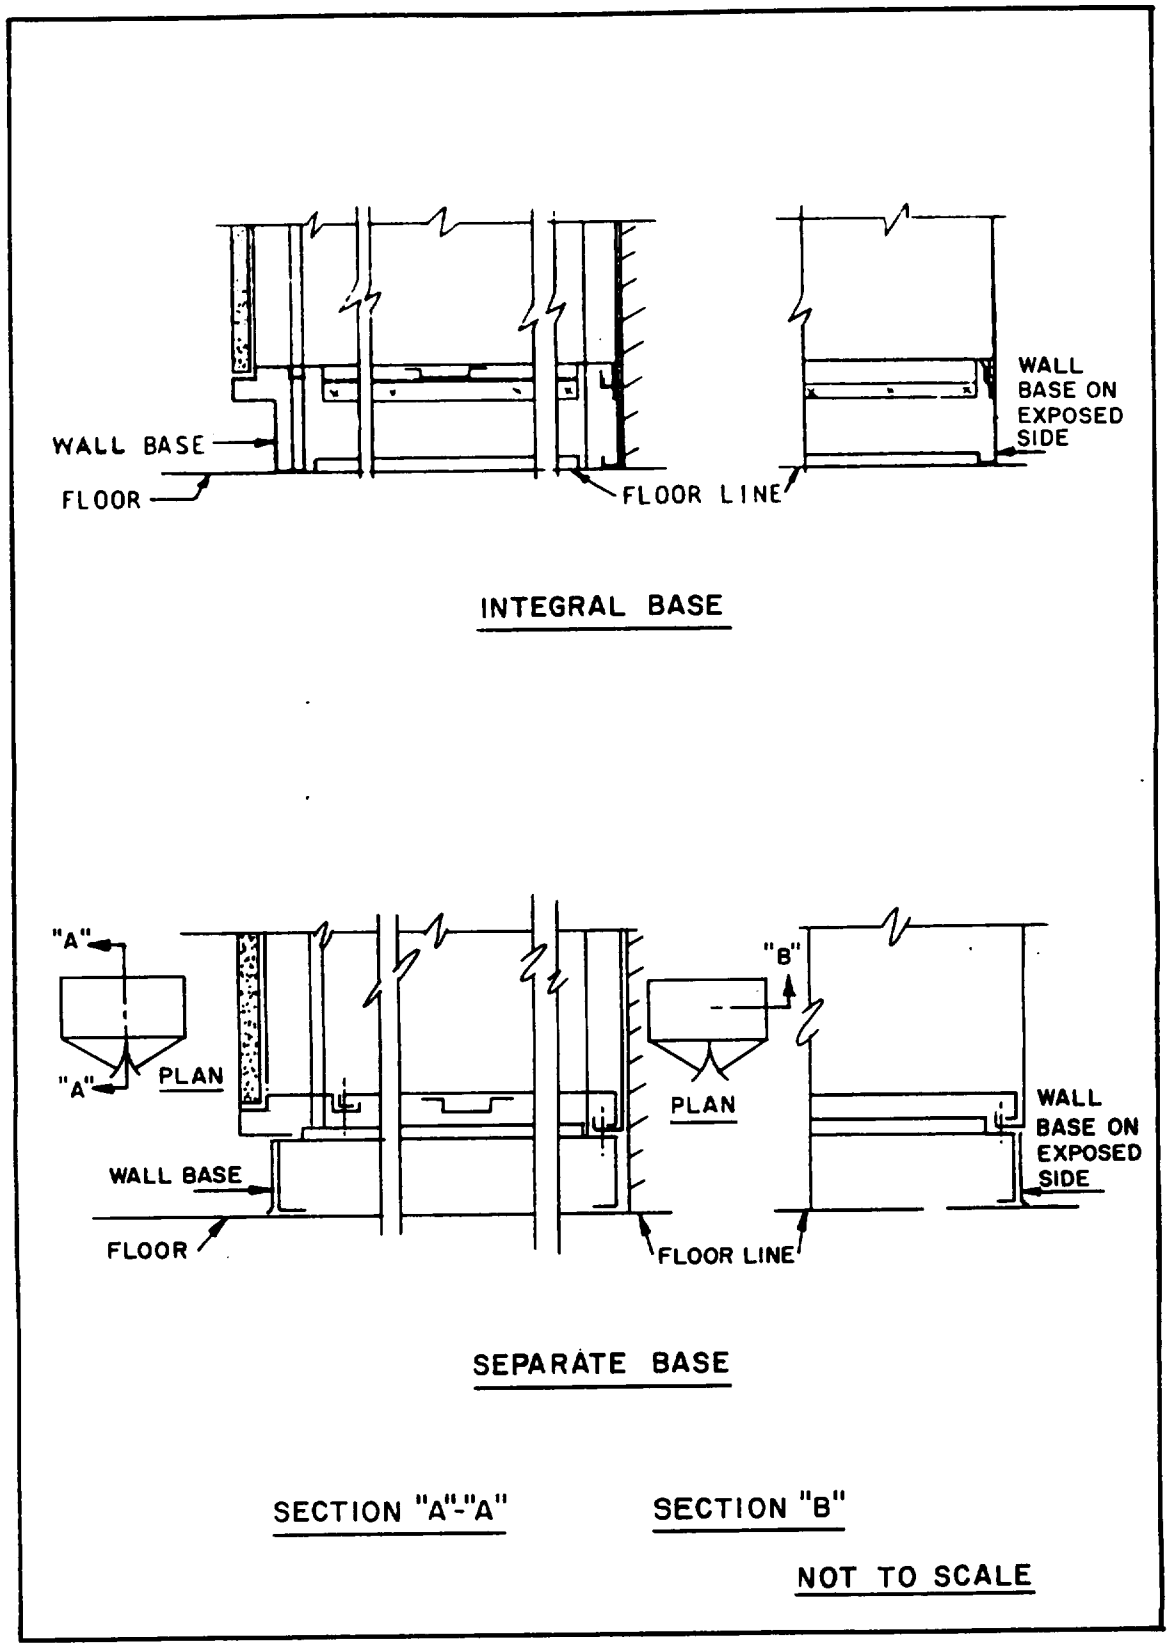


FIGURE 16. Steel wardrobe base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

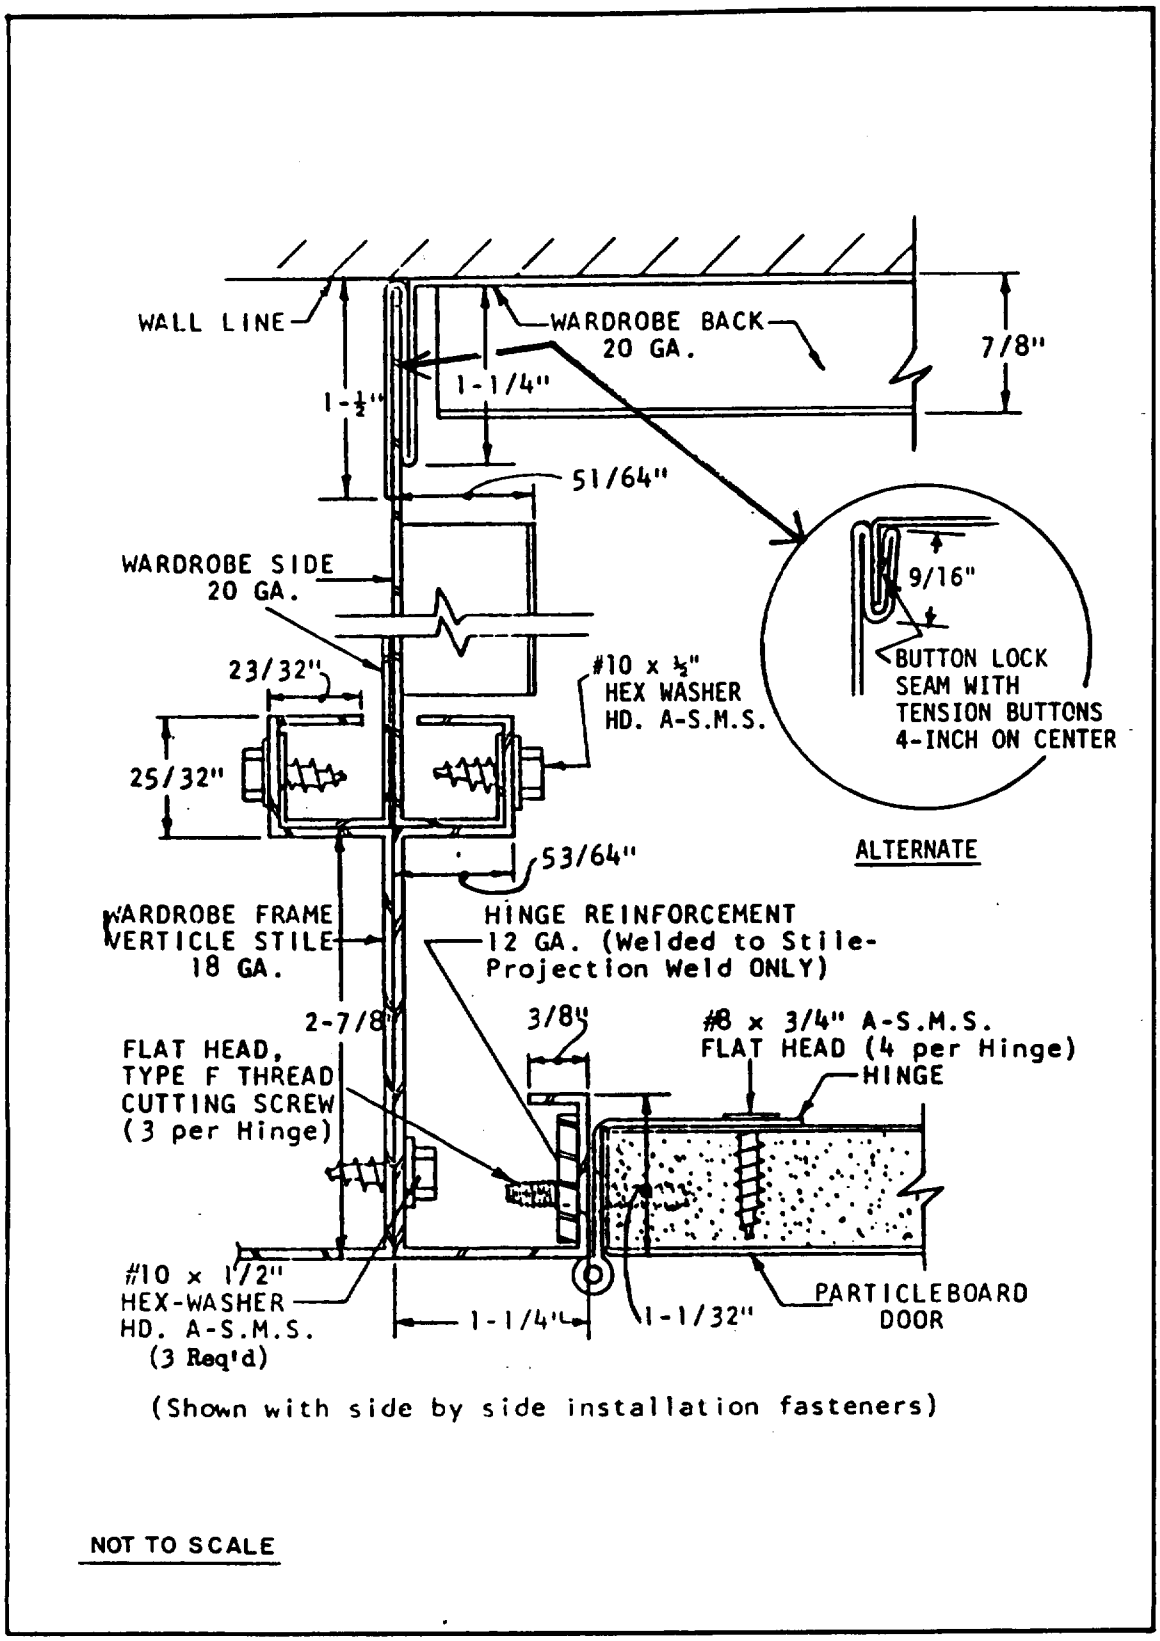


FIGURE 17. Steel wardrobe side section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

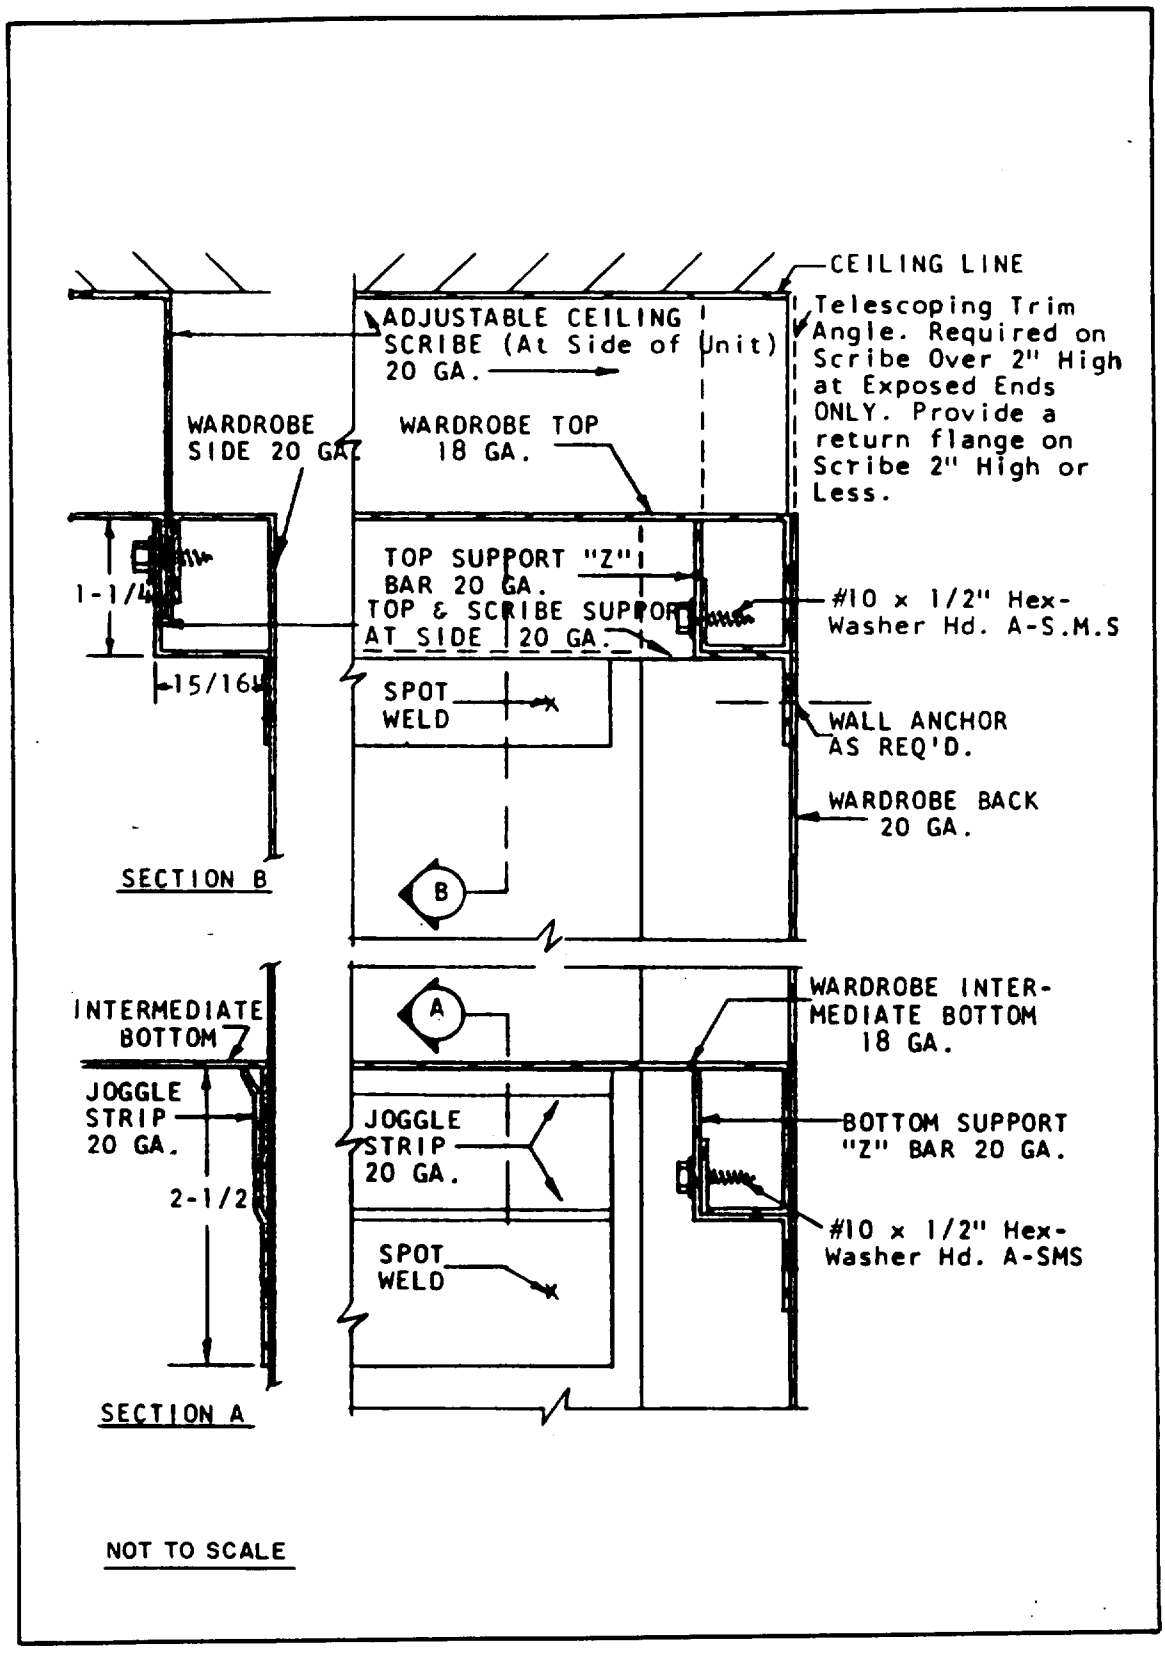


FIGURE 18. **Steel wardrobe upper section.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

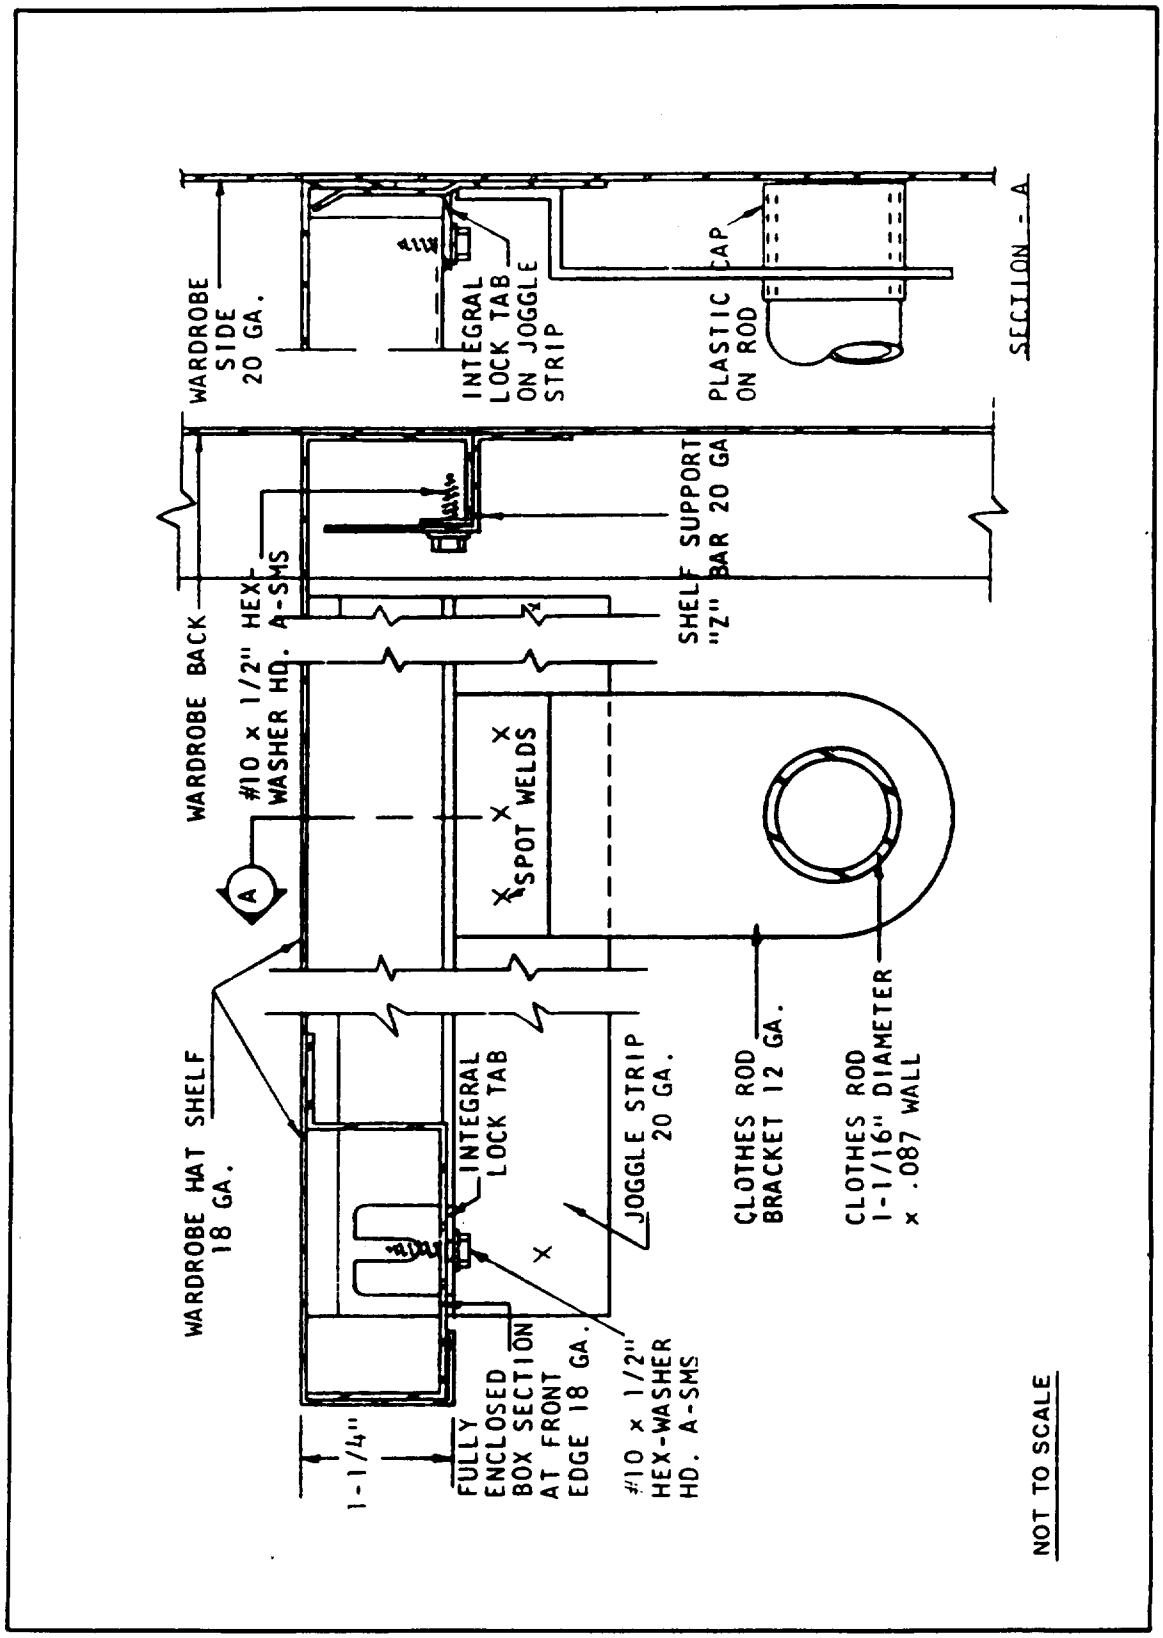


FIGURE 19. Steel wardrobe hat shelf section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

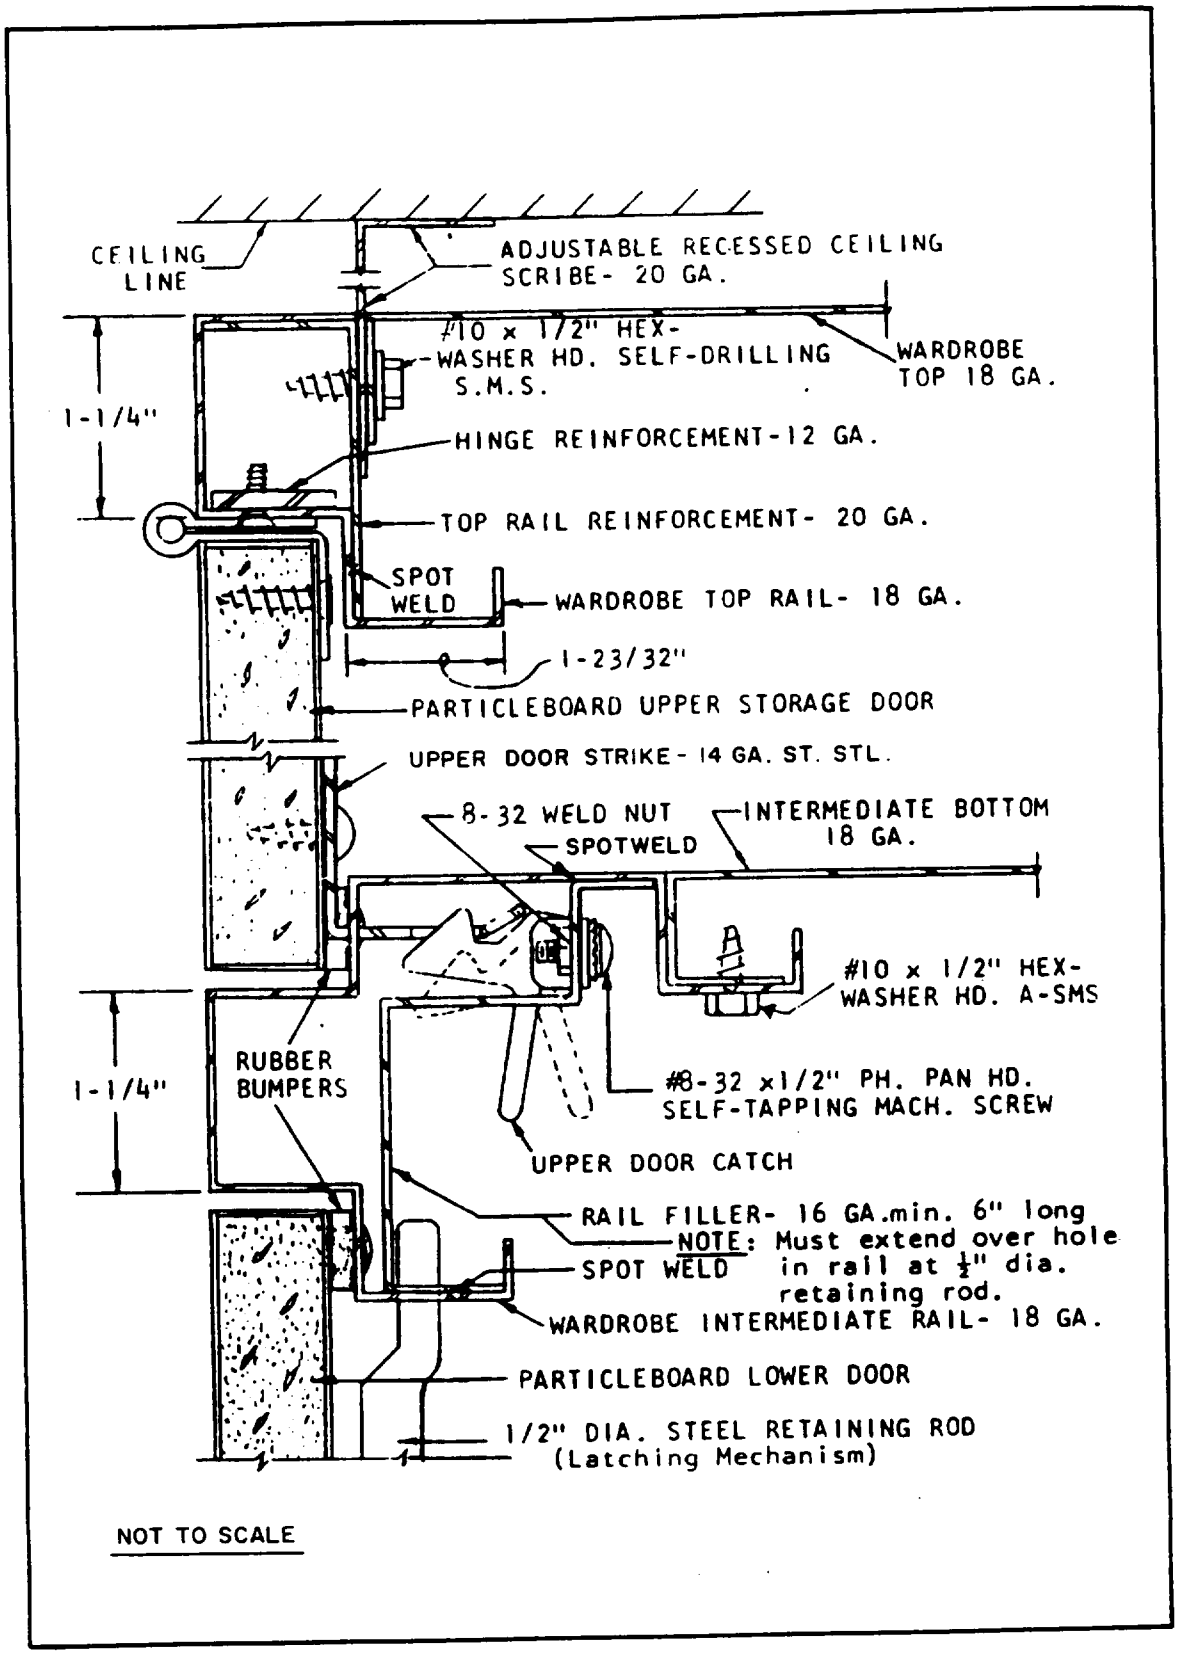


FIGURE 20. **Steel front upper section for style A wardrobes.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

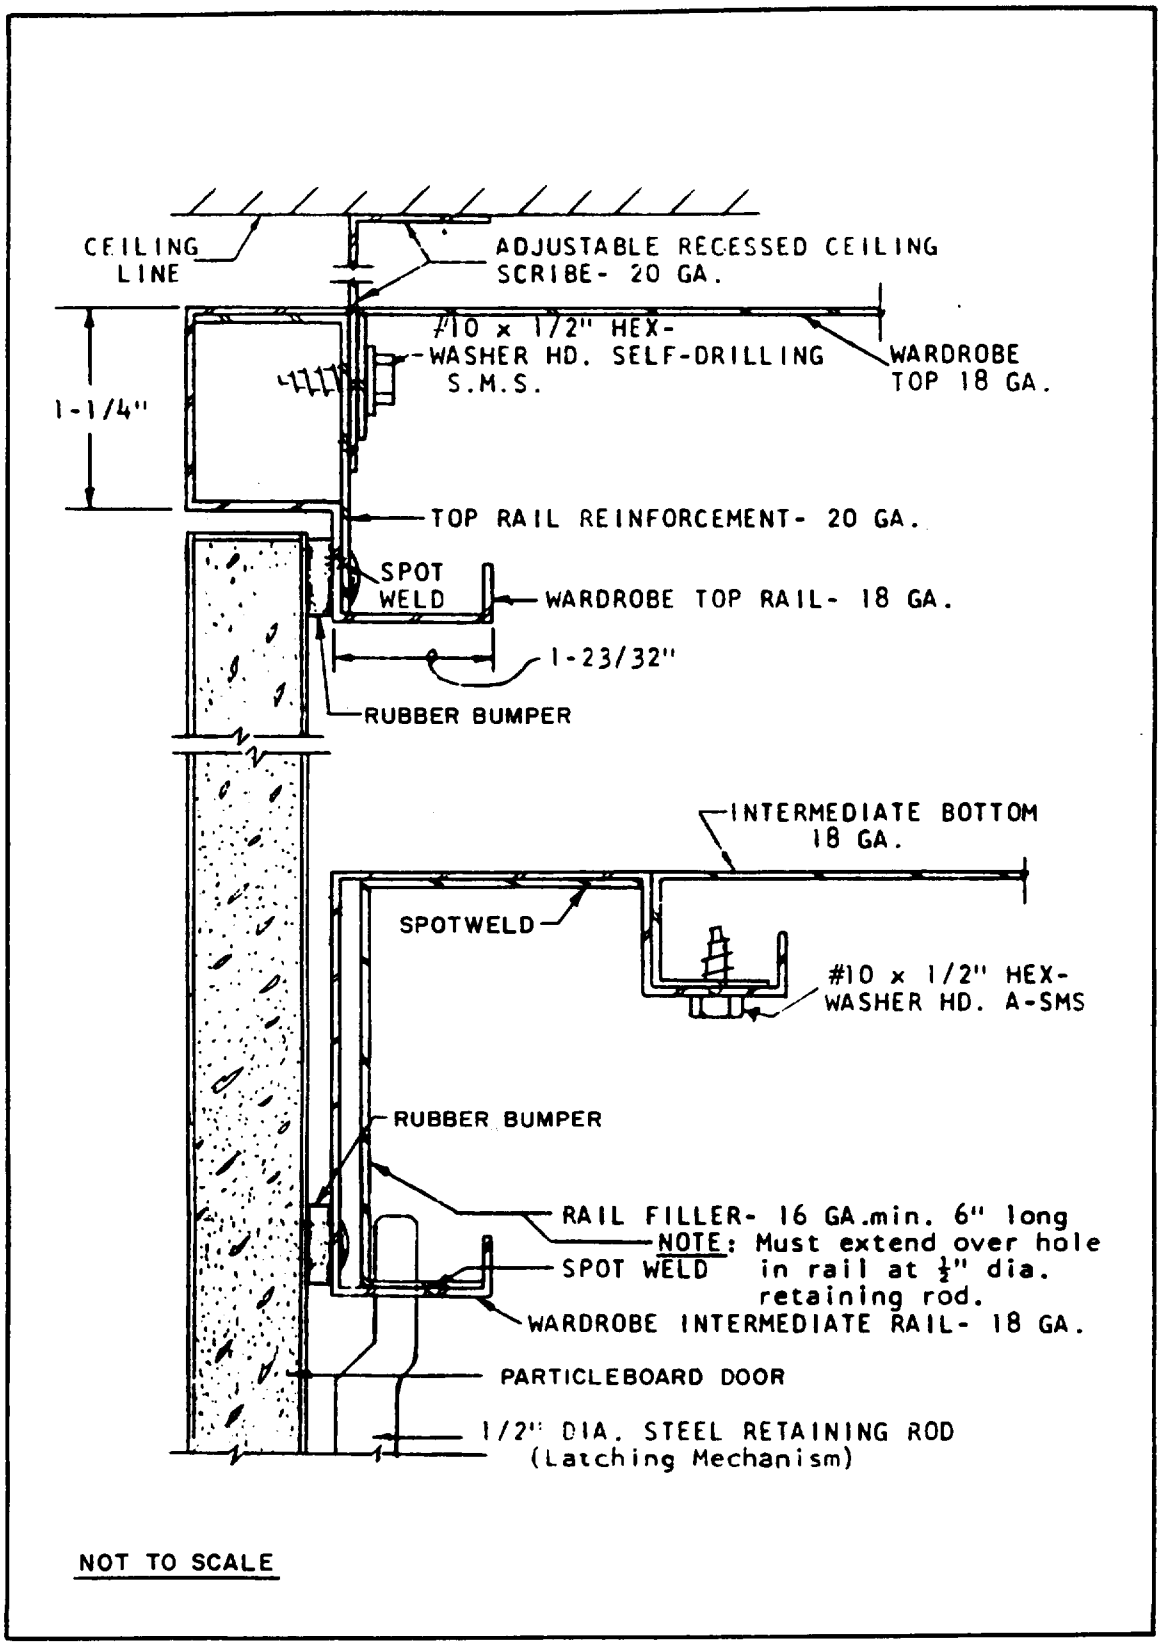


FIGURE 21. **Steel front upper section for style B wardrobes.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

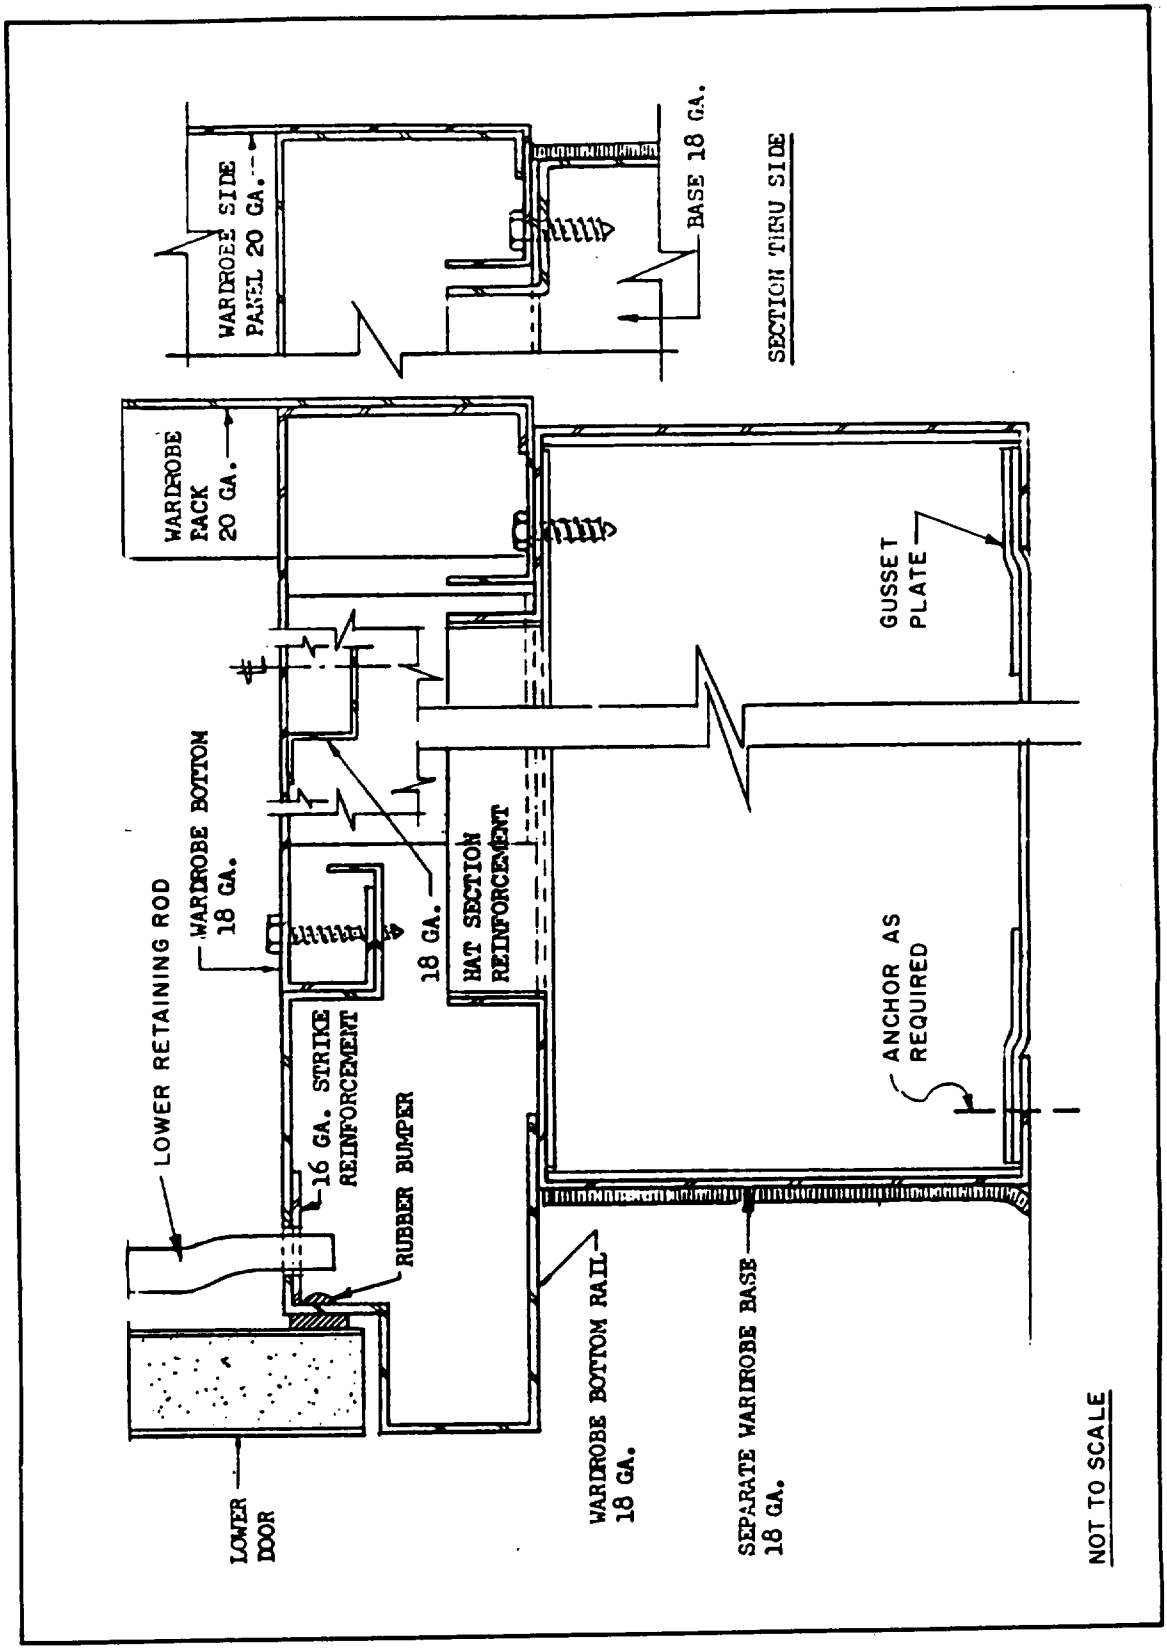


FIGURE 22. Steel wardrobe lower part with separate base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.


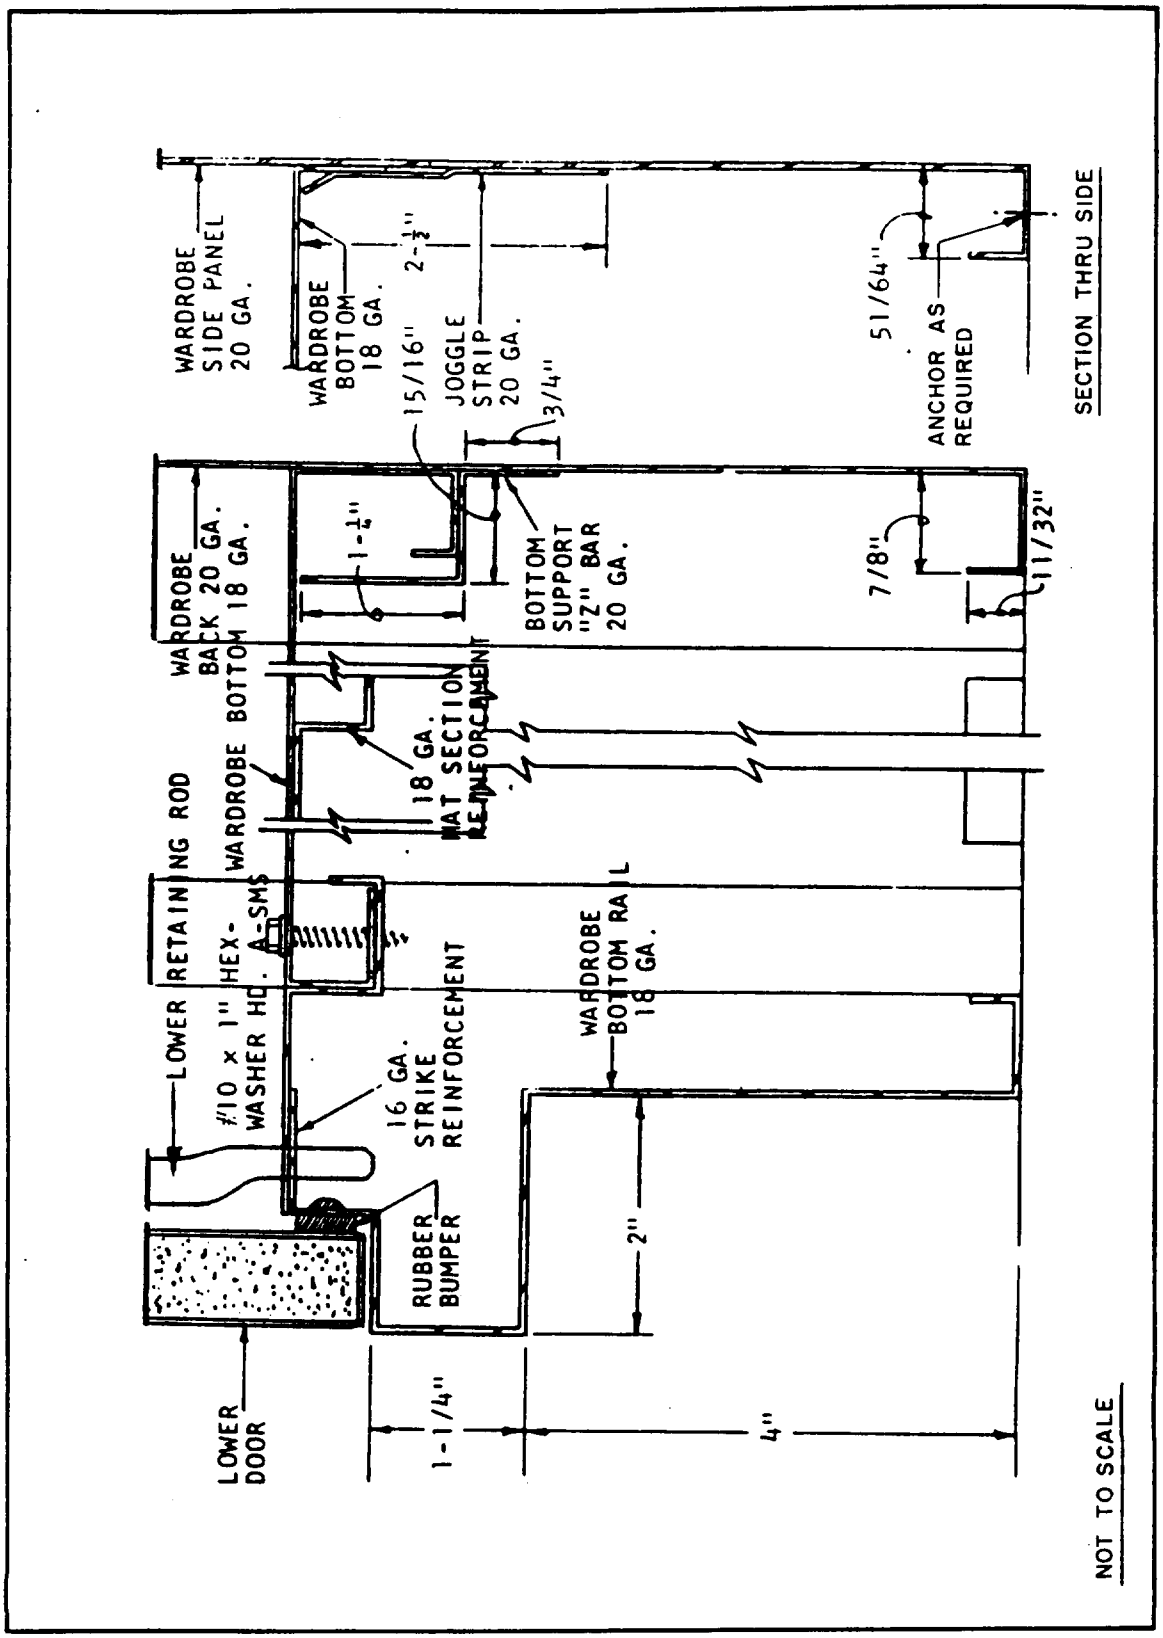


FIGURE 23. Steel wardrobe lower part with integral base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

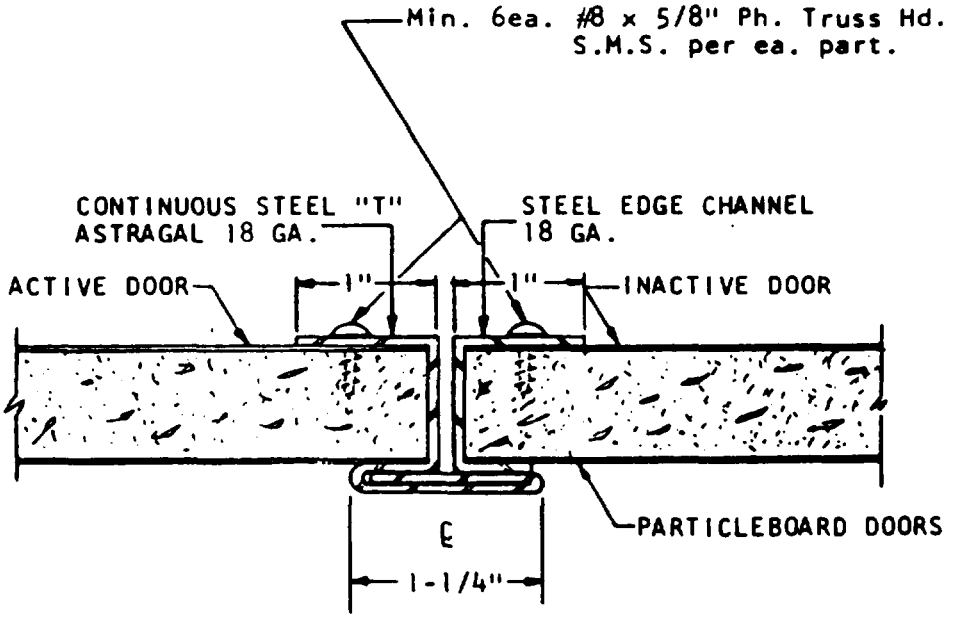

SECTION THRU WARDROBE DOORS (Steel)

NOT TO SCALE

FIGURE 24. Door section for steel wardrobes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

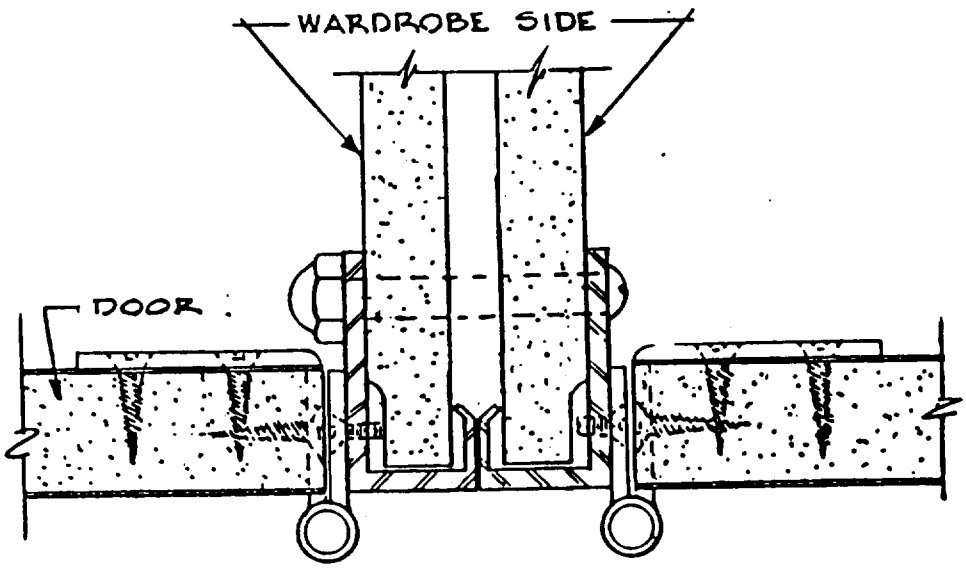


FIGURE 25. Aluminum framed wardrobe, side-to-side installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

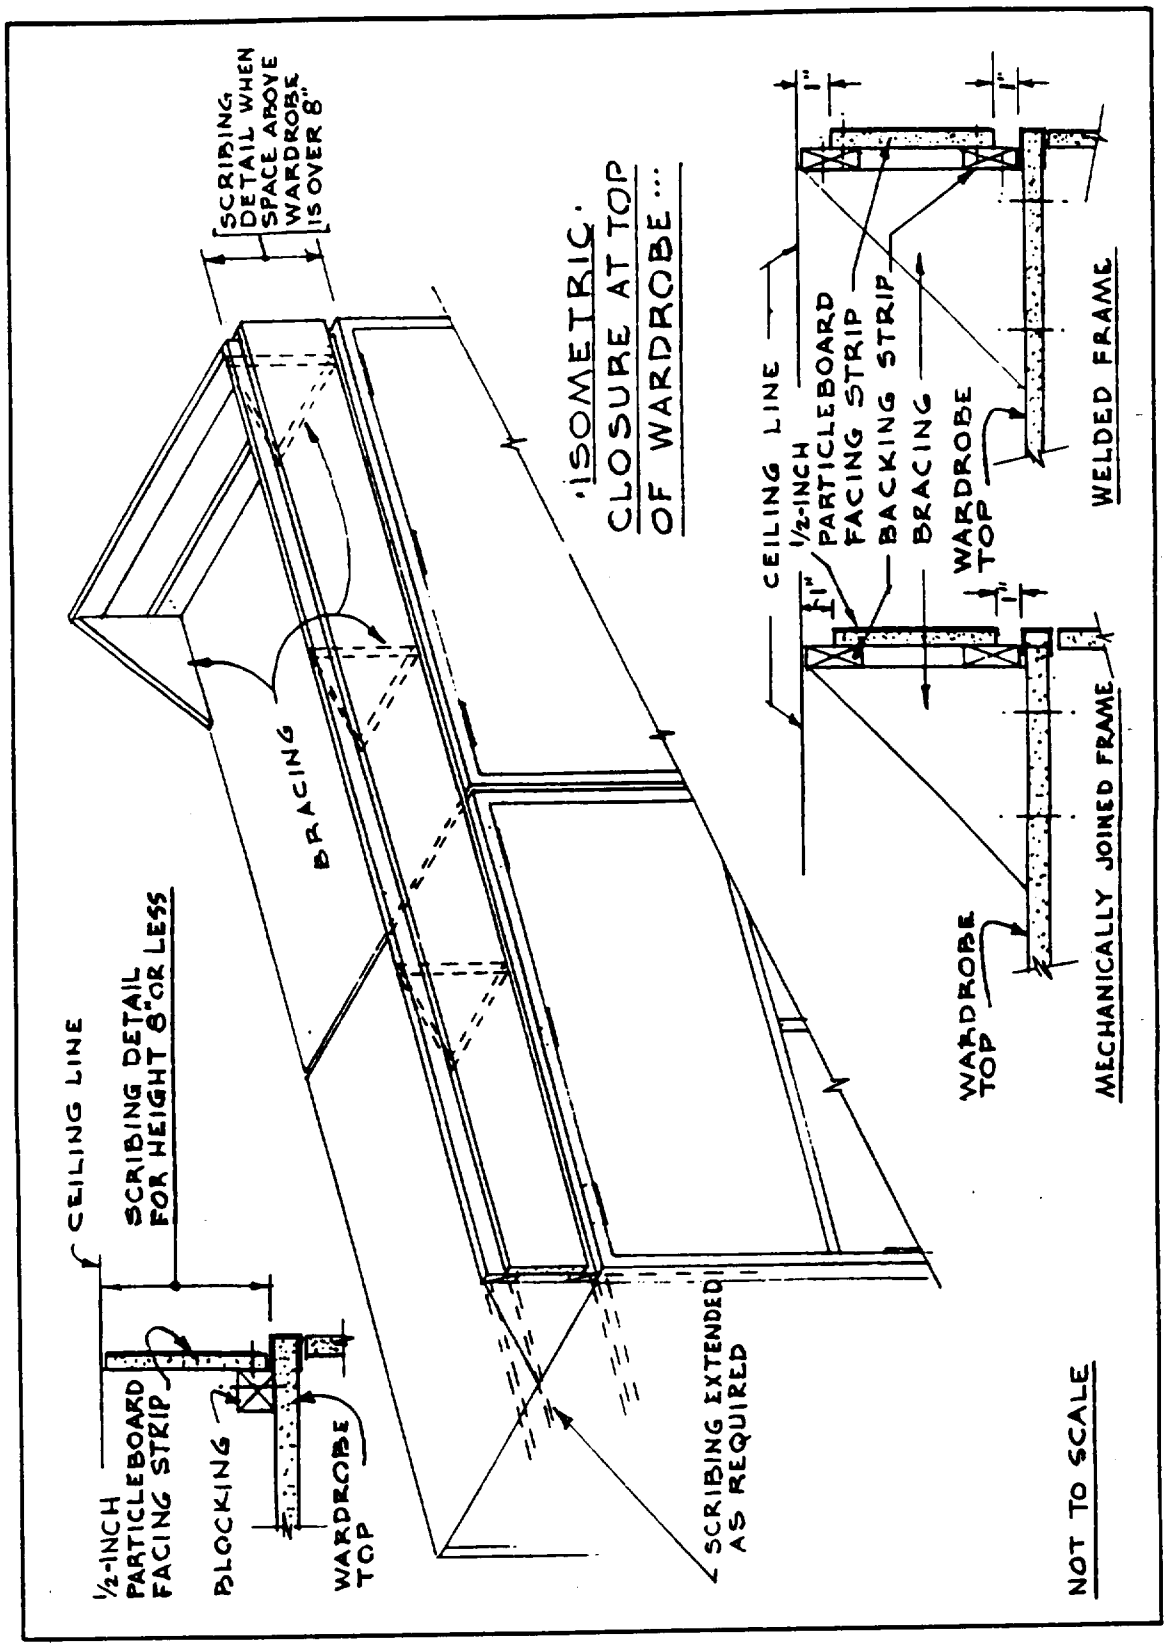


FIGURE 26. Scribing details, aluminum frame wardrobe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

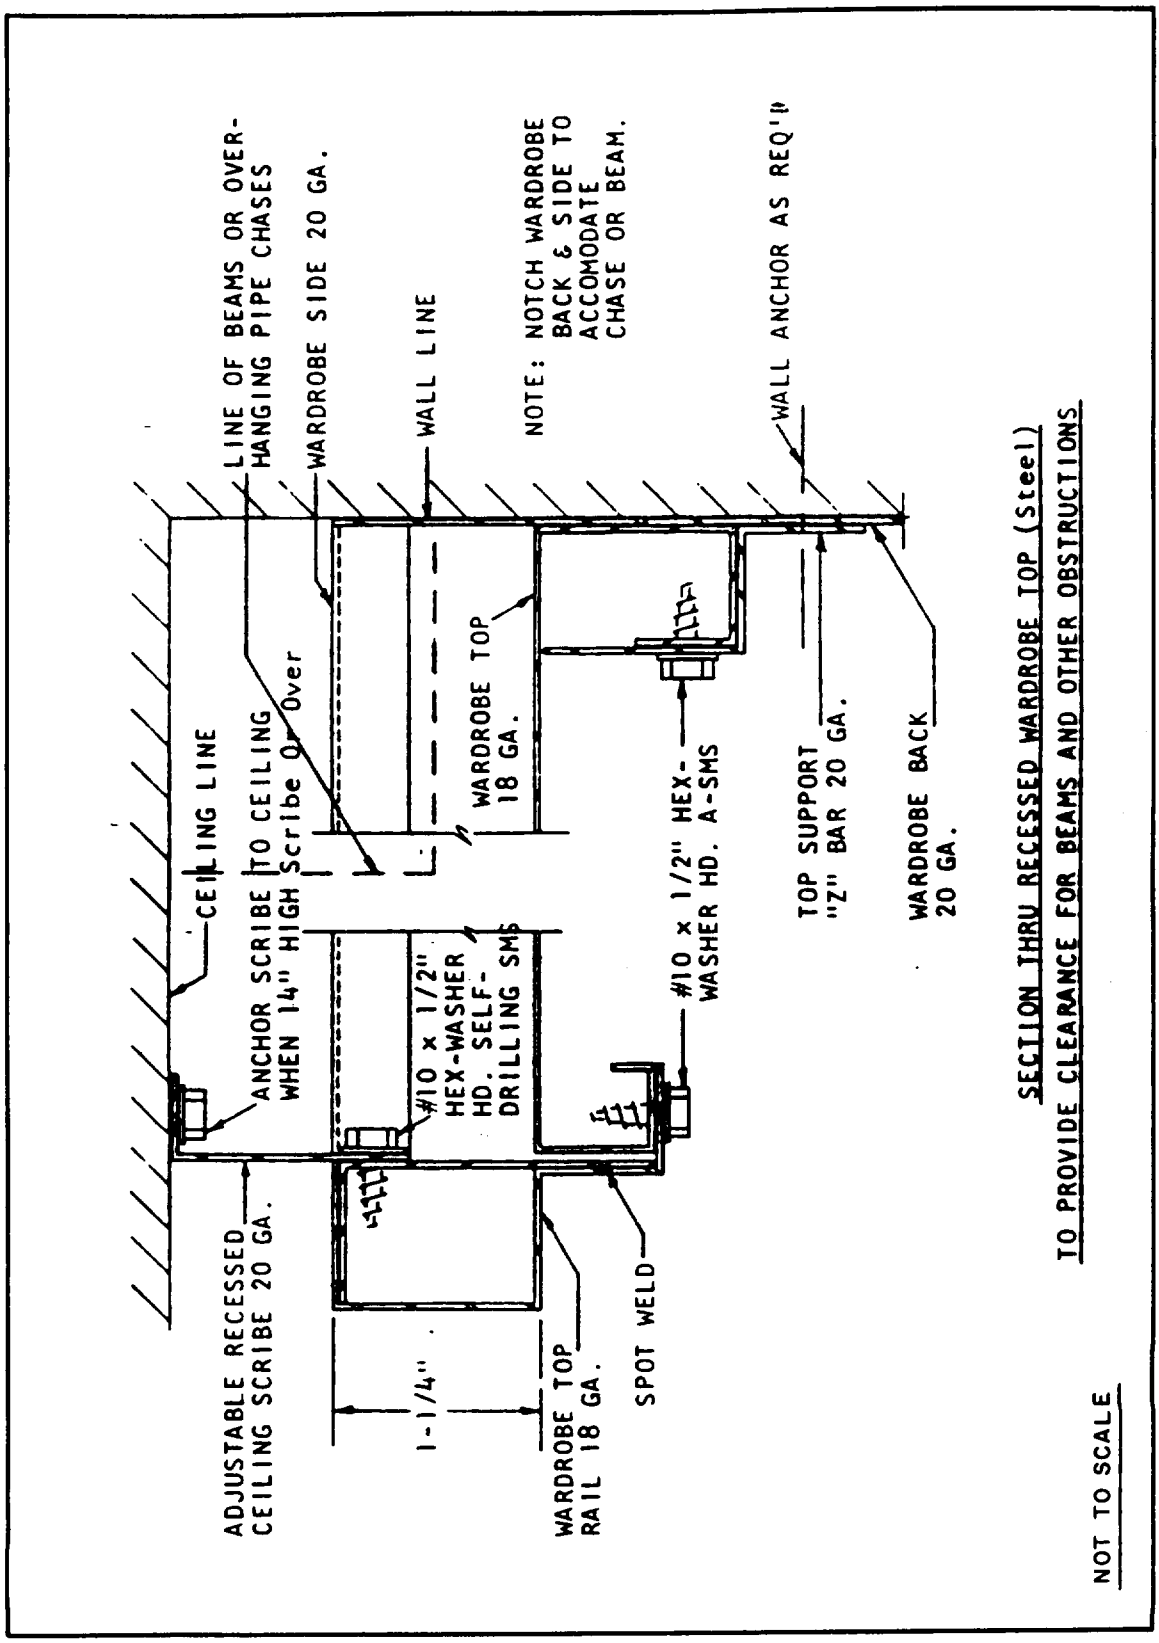


FIGURE 27. Providing clearance for obstructions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

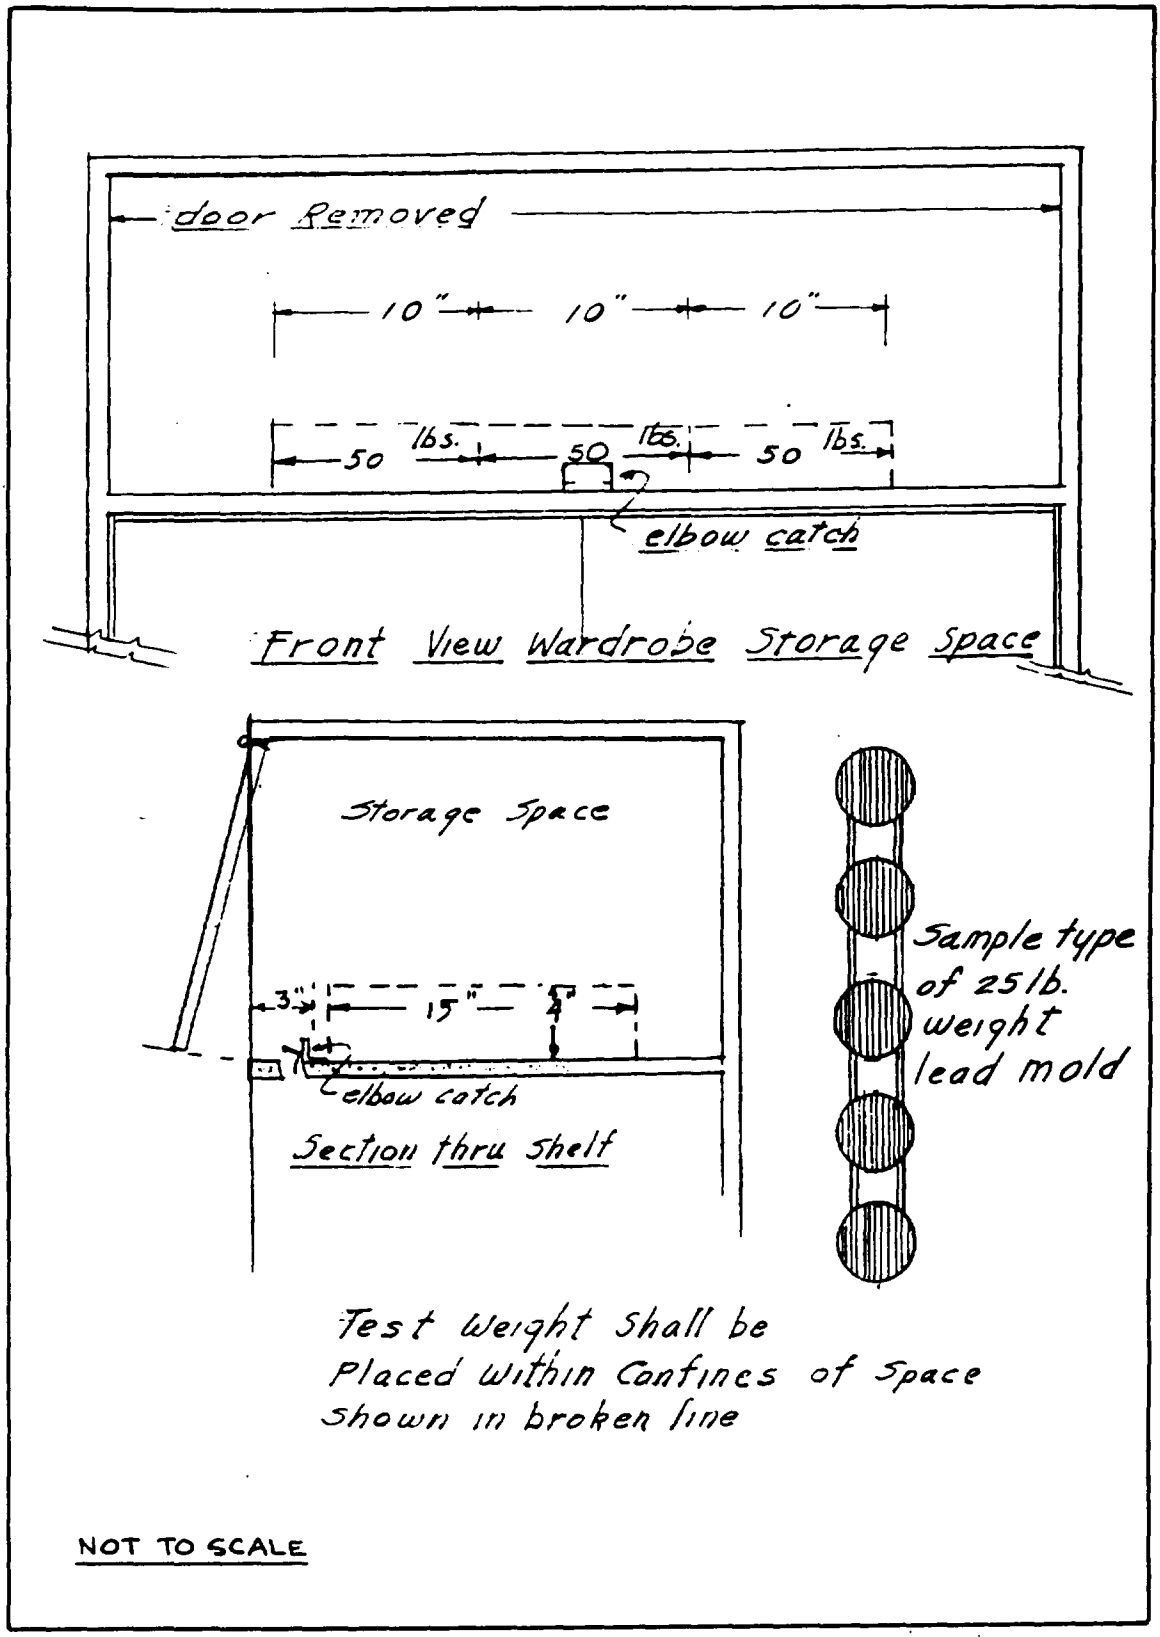


FIGURE 28. Placement of test weights.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-W-28581C	940408

3. DOCUMENT TITLE

WARDROBES: CLOTHING, COMPOSITE WOOD AND METAL

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
MR. D. C. MUI	802-985-5666	551-5666
c. ADDRESS (Include Zip Code) COMMANDING OFFICER, NCBC CODE 1562G 1000 23RD AVENUE PORT HUENEME, CA 93043-4301	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20 13:18Z
Check the source to verify that this is the current version before use.