The documentation and process conversion measures necessary to comply with this revision shall be completed by 08 October 1999.

INCH-POUND

MIL-PRF-19500/395D
09 July 1999
SUPERSEDING
MIL-S-19500/395C
12 November 1993

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, SWITCHING
TYPES 2N3735, 2N3735L, AND 2N3737, JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for NPN, silicon, switching transistors. Four levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (similar to TO-5 and TO-46).

1.3 Maximum ratings.

Type	P_T T_A = +25°C	P_T T_C = +25°C	V_{CBO}	V_{CEO}	V_{EBO}	I_C	$R_{\theta JC}$	T_J and T_{STG}
	W	W	V dc	V dc	V dc	A dc	°C/mW	°C
2N3735	1.0 1/	2.9 3/	75	40	5	1.5	.060	
2N3737	0.5 2/	1.9 4/	75	40	5	1.5	.088	-55 to +200

1/ Derate linearly at 5.71 mW/°C above T_A = +25°C.
2/ Derate linearly at 2.86 mW/°C above T_A = +25°C.
3/ Derate linearly at 16.6 mW/°C above T_C = +25°C.
4/ Derate linearly at 11.3 mW/°C above T_C = +25°C.

1.4 Primary electrical characteristics.

Limits	h_{FE3} 1/	$\|h_{fe}\|$	$V_{CE(sat)}$	C_{obo}	Pulse response		
	V_{CE} = 1.0 V dc I_C = 0.5 A dc	V_{CE} = 10 V dc I_C = 50 mA dc f = 100 MHz	I_C = 500 mA dc I_B = 50 mA dc	V_{CB} = 10 V dc I_E = 0 100 kHz ≤ f ≤ 1 MHz	t_d	t_r	t_{off}
			V dc	pF	ns	ns	ns
Min	40	2.5					
Max	140	6.0	0.5	9	8.0	40	60

1/ Pulsed (see 4.5.1)


Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad St., Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

2N3735 and 2N3735L

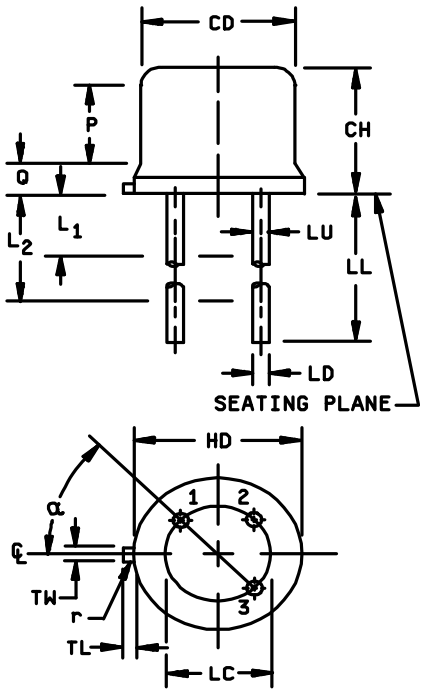

2N3735 DIMENSIONS
TO-5, T-1C

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.305	.355	7.75	9.02	
CH	.240	.260	6.10	6.60	
HD	.355	.370	9.02	9.40	
LC	.200 TP		5.08 TP		6
LD	.016	.021	0.41	0.53	7
LL	.500	.750	12.70	19.05	7
LU	.016	.019	0.41	0.48	7
L1		.050		1.27	7
L2	.250		6.35		7
TL	.029	.045	0.74	1.14	3
TW	.028	.034	0.71	0.86	9
P	.100		2.54		
Q		.040		1.02	4
r		.010		0.25.	10
α	45°TP		45°TP		6

FIGURE 1. Physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

2N3735L DIMENSIONS
TO-5, T-1A

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.305	.355	7.75	9.02	
CH	.240	.260	6.10	6.60	
HD	.355	.370	9.02	9.40	
LC	.200 TP		5.08 TP		6
LD	.016	.021	0.41	0.53	7
LL	1.500	1.750	38.10	44.45	7
LU	.016	.019	0.41	0.48	7
L1		.050		1.27	7
L2	.250		6.35		7
TL	.029	.045	0.74	1.14	3
TW	.028	.034	0.71	0.86	9
P	.100		2.54		
Q		.040		1.02	4
r		.010		0.25.	10
α	45°TP		45°TP		6

NOTES:
1. Dimensions are in inches. Lead 1 is emitter, lead 2 is base, and lead 3 is collector.
2. Metric equivalents are given for general information only.
3. Symbol TL is measured from HD maximum.
4. Details of outline in this zone are optional.
5. Symbol CD shall not vary more than .010 inch (0.25 mm) in zone P. This zone is controlled for automatic handling.
6. Leads at gauge plane .054 inch (1.37 mm) +.001 inch (0.03 mm) - .000 inch (0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of TP relative to tab. Device may be measured by direct methods or by gauge.
7. Symbol LU applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum.
8. Lead number three is electrically connected to case.
9. Beyond r maximum, TW shall be held for a minimum length of .011 inch (0.28 mm).
10. Symbol r applied to both inside corners of tab.
11. In accordance with ANSI Y14.5 M, diameters are equivalent to ϕX symbology.

FIGURE 1. Physical dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

2N3737

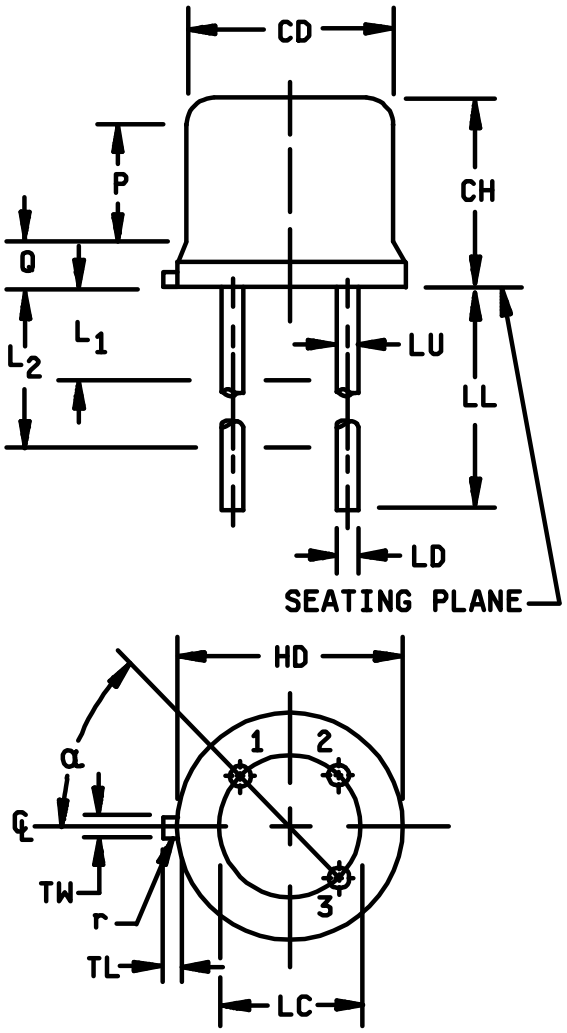


FIGURE 1. Physical dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

2N3737 DIMENSIONS

TO-46, T-2B

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.178	.195	4.52	4.95	
CH	.240	.260	6.10	6.60	
HD	.209	.230	5.31	5.84	
LC	.100 TP		2.54 TP		6
LD	.016	.021	0.41	0.53	7
LL	.500	.750	12.70	19.05	7
LU	.016	.019	0.41	0.48	7
L1		.050		1.27	7
L2	.250		6.35		7
TL	.028	.048	0.71	1.22	3
TW	.036	.046	0.91	1.17	9
P	.100		2.54		
Q		.040		1.02	4
r		.007		.018	10
α	45°TP		45°TP		6

NOTES:
1. Dimensions are in inches. Lead 1 is emitter, lead 2 is base, and lead 3 is collector.
2. Metric equivalents are given for general information only.
3. Symbol TL is measured from HD maximum.
4. Details of outline in this zone are optional.
5. Symbol CD shall not vary more than .010 inch (0.25 mm) in zone P. This zone is controlled for automatic handling.
6. Leads at gauge plane .054 inch (1.37 mm) +.001 inch (0.03 mm) - .000 inch (0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of TP relative to tab. Device may be measured by direct methods or by gauge.
7. Symbol LU applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum.
8. Lead number three is electrically connected to case.
9. Beyond r maximum, TW shall be held for a minimum length of .011 inch (0.28 mm).
10. Symbol r applied to both inside corners of tab.
11. In accordance with ANSI Y14.5 M, diameters are equivalent to ϕX symbology

FIGURE 1. Physical dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

DEPARTMENT OF DEFENSE

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, 700 Robbins Avenue, Building 4D (DPM-DODSSP), Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.3 Interface requirements and physical dimensions. The Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500, and figure 1, (similar to TO-5), T-1C for 2N3735, T-1A for 2N3735L, (similar to TO-46), T-2B for 2N3737 herein.

3.3.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500 and MIL-STD-750. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in paragraph 1.3, 1.4, and table I.

3.6 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.7 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.2).

4. VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.3 Screening (JANS, JANTX, and JANTXV levels only). Screening shall be in accordance with table IV of MIL-PRF19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANS level	JANTX and JANTXV levels
9	I_{CBO1} and h_{FE3}	Not applicable
11	I_{CBO1}; h_{FE3}; ΔI_{CBO1} = 100 percent or 25 nA dc, whichever is greater; Δh_{FE3} = ±15 percent of initial value.	I_{CBO1} and h_{FE3}
12	See 4.3.1	See 4.3.1
13	Subgroups 2 and 3 of table I herein; ΔI_{CBO1} = 100 percent or 25 nA dc, whichever is greater; Δh_{FE3} = ±15 percent of initial value.	Subgroup 2 of table I herein; ΔI_{CBO1} = 100 percent or 25 nA dc, whichever is greater; Δh_{FE3} = ±15 percent of initial value.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows:

JANS level: V_{CB} = 10 V dc; at T_A = room ambient as defined in 4.5 of MIL-STD-750.
For 2N3735 and 2N3735L, P_T = 1.0 W;
For 2N3737, P_T = 0.5 W

JANTX, and JANTXV levels: $V_{CB} \geq$ 30 V dc; at T_A = room ambient as defined in 4.5 of MIL-STD-750.
For 2N3735 and 2N3735L, P_T = 1.0 W;
For 2N3737, P_T = 0.5 W

NOTE: No heat sink or forced air cooling on the devices shall be permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, group A, subgroup 2 herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in tables VIa (JANS) and VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and paragraphs 4.4.2.1 and 4.4.2.2 herein. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, group A, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

4.4.2.1 Group B inspection, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B3	2037	Test condition A.
B4	1037	$V_{CB} \geq 10$ V dc; $P_T = 1.0$ W for 2N3735, 2N3537L, $P_T = 0.5$ W for 2N3737 at $T_A = +30°C \pm 5°C$; $t_{on} = t_{off} = 3$ minutes minimum for 2,000 cycles. No heat sink or forced-air cooling on devices shall be permitted.
B5	1027	$V_{CB} = 10$ V dc; $P_T = 1.0$ W for 2N3735, 2N3537L, $P_T = 0.5$ W for 2N3737 at $T_A = +125°C \pm 25°C$ or adjusted T_A to give an average lot $T_J = 275°C$
B6	3131	see 4.5.2

4.4.2.2 Group B inspection, table VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
B3	1027	$V_{CB} \geq 30$ V dc; $T_A = +30°C \pm 5°C$. Adjust P_T to achieve $T_J = 150°C$ min. No heat sink or forced-air cooling on devices shall be permitted.
B3	2037	Test condition A.
B5	3131	See 4.5.2

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

4.4.3.1 Group C inspection, table VII of MIL-PRF-19500.

Subgroup	Method	Condition
C2	2036	Test condition E
C6	1026	$V_{CB} \geq 30$ V dc; $T_A = +30°C \pm 5°C$. Adjust P_T to achieve $T_J = 150°C$ min. No heat sink or forced-air cooling on devices shall be permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Breakdown voltage collector to emitter	3011	Bias condition D; I_C = 10 mA dc pulsed (see 4.5.1)	$V_{(BR)CEO}$	40		V dc
Breakdown voltage collector to base	3001	Bias condition D; I_C = 10 µA dc;	$V_{(BR)CBO}$	75		V dc
Breakdown voltage emitter - base	3026	Bias condition D; I_E = 10 µA dc	$V_{(BR)EBO}$	5		V dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 30 V dc	I_{CBO1}		250	nA dc
Collector to emitter cutoff current	3041	Bias condition A; V_{CE} = 30 V dc V_{EB} = 2.0 V dc	I_{CEX1}		200	nA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 4.0 V dc	I_{EBO1}		100	nA dc
Forward current transfer ratio	3076	V_{CE} = 1.0 V dc; I_C = 10 mA dc	h_{FE1}	35		
Forward current transfer ratio	3076	V_{CE} = 1.0 V dc; I_C = 150 mA dc pulsed (see 4.5.1)	h_{FE2}	40		
Forward current transfer ratio	3076	V_{CE} = 1.0 V dc; I_C = 500 mA dc pulsed (see 4.5.1)	h_{FE3}	40	140	
Forward current transfer ratio	3076	V_{CE} = 1.5 V dc; I_C = 1.0 A dc pulsed (see 4.5.1)	h_{FE4}	20	80	
Forward current transfer ratio	3076	V_{CE} = 5.0 V dc; I_C = 1.5 A dc pulsed (see 4.5.1)	h_{FE5}	20		

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued						
Collector to emitter voltage (saturated)	3071	I_C = 10 mA dc, I_B = 1.0 mA dc	$V_{CE(sat)1}$		0.2	V dc
Collector to emitter voltage (saturated)	3071	I_C = 150 mA dc, I_B = 15 mA dc, pulsed (see 4.5.1)	$V_{CE(sat)2}$		0.3	V dc
Collector to emitter voltage (saturated)	3071	I_C = 500 mA dc, I_B = 50 mA dc, pulsed (see 4.5.1)	$V_{CE(sat)3}$		0.5	V dc
Collector to emitter voltage (saturated)	3071	I_C = 1.0 mA dc, I_B = 100 mA dc, pulsed (see 4.5.1)	$V_{CE(sat)4}$		0.9	V dc
Base to emitter saturated voltage	3066	Test condition A, I_C = 10 mA dc, I_B = 1.0 mA dc	$V_{BE(sat)1}$		0.8	V dc
Base to emitter saturated voltage	3066	Test condition A, I_C = 150 mA dc, I_B = 15 mA dc pulsed (see 4.5.1)	$V_{BE(sat)2}$		1.0	V dc
Base to emitter saturated voltage	3066	Test condition A, I_C = 500 mA dc, I_B = 50 mA dc pulsed (see 4.5.1)	$V_{BE(sat)3}$		1.2	V dc
Base to emitter saturated voltage	3066	Test condition A, I_C = 1.0 A dc, I_B = 100 mA dc pulsed (see 4.5.1)	$V_{BE(sat)4}$	0.9	1.4	V dc
Subgroup 3						
High-temperature operation:		T_A = +150°C				
Collector to emitter cutoff current	3041	Bias condition A; V_{CE} = 30 V dc, V_{EB} = 2.0 V dc	I_{CEX2}		250	µA dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 3 - Continued						
Low-temperature operation:		T_A = -55°C				
Forward current transfer ratio	3076	V_{CE} = 1.0 V dc; I_C = 500 mA dc pulsed (see 4.5.1)	h_{FE6}	15		
Subgroup 4						
Magnitude of common - emitter small-signal short-circuit forward current transfer ratio	3306	V_{CE} = 10 V dc; I_C = 50 mA dc; f = 100 MHz	$\|h_{fe}\|$	2.5	6.0	
Open circuit output capacitance	3236	V_{CB} = 10 V dc, I_E = 0, 100 kHz ≤ f ≤ 1 MHz	C_{obo}		9.0	pF
Input capacitance (output open - circuited)	3240	V_{EB} = 0.5 V dc, I_C = 0, 100 kHz ≤ f ≤ 1 MHz	C_{ibo}		80	pF
Pulse response:						
Delay response	3251	Test condition A; V_{CC} = 30 V dc, V_{BE} = 2 V dc, I_C = 1.0 A dc, I_{B1} = 100 mA dc, (see figure 2)	t_d		8.0	ns
Rise time	3251	Test condition A; V_{CC} = 30 V dc, V_{BE} = 2 V dc, I_C = 1.0 A dc, I_{B1} = 100 mA dc, (see figure 2)	t_r		40	ns
Turn-off time	3251	Test condition A; V_{CC} = 30 V dc, I_C = 1.0 A dc, I_{B1} = -I_{B2} = 100 mA dc, (see figure 3)	t_{off}		60	ns
Subgroups 5, 6, and 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

TABLE II. Groups A, B, C, and E delta measurements. 1/ 2/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Collector to base cutoff current	3036	Bias condition D, V_{CB} = 30 V dc	ΔI_{CBO1}	100 % of initial value or 25 nA dc whichever is greater.		
2.	Forward-current transfer ratio	3076	V_{CE} = 1 V dc, I_C = 500 mA dc, pulsed (see 4.5.1)	Δh_{FE3}	±25 % change from initial value.		
3.	Collector to emitter voltage (saturated)	3071	I_C = 500 mA dc, I_B = 50 mA dc, pulsed (4.5.1)	$\Delta V_{CE(SAT)3}$	±50 mV dc change from previous measured value.		

1/ The delta measurements for table VIa (JANS) of MIL-PRF-19500 are as follows:

a. Subgroup 4, see table II herein, step 3.

b. Subgroup 5, see table II herein, step 3.

2/ The delta measurements for table VIb (JAN, JANTX, JANTXV) of MIL-PRF-19500 are as follows:

a. Subgroup 3, see table II herein, step 2.

3/ The delta measurements for table VII of MIL-PRF-19500 are as follows:

a. Subgroup 6, see table II herein, steps 1and 2 for (JANS, JAN, JANTX, and JANTXV).

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Thermal resistance. Thermal resistance measurements shall be conducted in accordance with method 3131 of MIL-STD-750. The following details shall apply:

a. Collector current magnitude during power application shall be 45 mA dc for 2N3735 and 2N3735L and 31 mA dc for 2N3737.

b. Collector to emitter voltage magnitude shall be 20 V dc.


c. Reference temperature measuring point shall be the case.

d. Reference point temperature shall be 25°C

e. Mounting arrangement shall be with heat sink to case.

f. Maximum limit of 60°C/W for 2N3735, 2N3735L, and 88°C/W for 2N3737.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

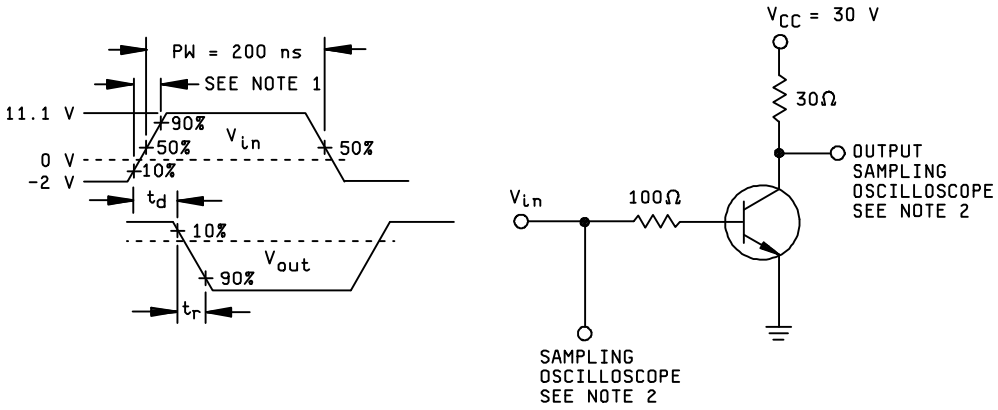


NOTES:

1. The rise time (t_r) of the applied pulse shall be ≤ 0.1 ns, duty cycle ≤ 2 percent, and the generator source impedance shall be 50 Ω.

2. Sampling oscilloscope: Z_{in} ≥ 100 kΩ, C_{in} ≤ 12 pF, rise time ≤ 5 ns.

FIGURE 2. Test circuit and waveforms for measuring turn-on.

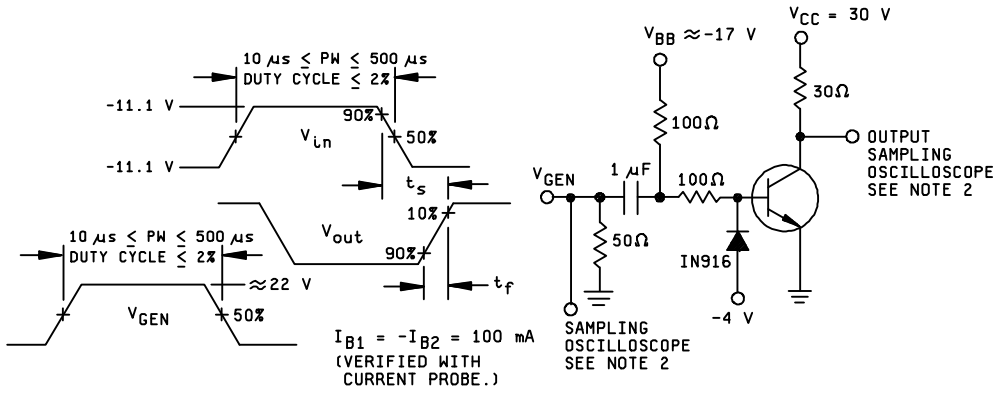

NOTES:

2. The rise time (t_r) of the applied pulse shall be ≤ 0.1 ns, duty cycle ≤ 2 percent, and the generator source impedance shall be 50 Ω.

2. Sampling oscilloscope: Z_{in} ≥ 100 kΩ, C_{in} ≤ 12 pF, rise time ≤ 5 ns.

FIGURE 3. Test circuit and waveforms for measuring turn-off.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation and, if required, the specified issue of individual documents referenced (see 2.2.1).

b. Lead finish (see 3.3.1).

c. Type designation and product assurance level.

d. Packaging requirements (see 5.1).

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.6 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturer's List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, AV, MI, SM
Navy - AS, CG, MC
Air Force – 13, 15, 19

(Project 5961-2126)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/395D	2. DOCUMENT DATE *(YYYYMMDD)*

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, SWITCHING, TYPE 2N3735, 2N3735L and 2N3737, JAN, JANTX, JANTXV,AND JANS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(If applicable)*	7. DATE SUBMITTED *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME Alan Barone	b. TELEPHONE *(Include Area Code* (1) Commercial 614-692-0510 (2) DSN 850-0510
c. ADDRESS *(Include Zip Code)* DSCC-VAC 3990 East Broad Street Columbus, Ohio 43216-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703)767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:28Z
Check the source to verify that this is the current version before use.