The documentation and process conversion measures necessary to comply with this revision shall be completed by 02 November 1999.

INCH-POUND

MIL-PRF-19500/399B
02 August 1999
SUPERSEDING
MIL-S-19500/399A
19 June 1990

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, SWITCHING
TYPE 2N3960
JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for NPN silicon, switching transistors. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (similar to TO-39), (see 3.3).

1.3 Maximum ratings.

P_T 1/ T_A = +25°C	V_{CBO}	V_{CEO}	V_{EBO}	T_J and T_{STG}
mW	V dc	V dc	V dc	°C
400	20	12	4.5	-65 to +200

1/ Derate linearly 2.30 mW/°C above T_A = +25°C.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics.

Limits	h_{FE}		$V_{CE(sat)}$		C_{obo}	$\lvert h_{fe} \rvert$	V_{BE}	
	V_{CE} = 1.0 V dc I_C = 1.0 mA dc	V_{CE} = 1.0 V dc I_C = 10 mA dc	I_C = 1.0 mA dc I_B = 0.1 mA dc	I_C = 30 mA dc I_B = 3.0 mA dc	V_{CB} = 4 V dc I_E = 0 100 kHz ≤ f ≤ 1 MHz	V_{CE} = 4 V dc, I_C = 5.0 mA dc f = 100 MHz	I_C = 1.0 mA dc V_{CE} = 1.0 V dc	I_C = 30 mA dc V_{CE} = 1.0 V dc
			V dc	V dc	pF		V dc	V dc
Min	40	60				13		
Max		300	0.2	0.3	2.5		0.8	1.0

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD


MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, 700 Robbins Avenue, Building 4D (DPM – DODSSP), Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.

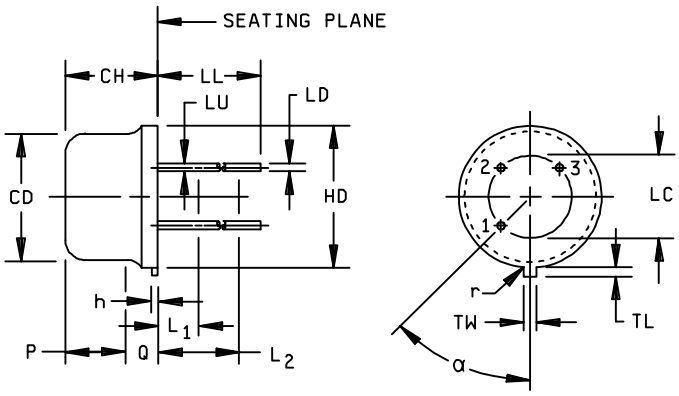

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.178	.195	4.52	4.95	
CH	.170	.210	4.32	5.33	
HD	.209	.230	5.31	5.84	
LC	.200 TP		5.08 TP		6
LD	.016	.021	0.41	0.53	7,11
LL	.500	.750	12.70	19.05	7
LU	.016	.019	0.41	0.48	12
L1		.050		1.27	7
L2	.250		6.35		7
TL	.028	.048	0.71	1.22	3
TW	.036	.046	0.91	1.17	9
P	.100		2.54		5
Q		.040		1.02	4
r		.010		0.25	10
α	45° TP		45° TP		6

NOTES:
1. Dimensions are in inches. Lead 1 is emitter, lead 2 is base, and case is collector.
2. Metric equivalents are given for general information only.
3. Symbol TL is measured from HD maximum.
4. Details of outline in this zone are optional.
5. Symbol CD shall not vary more than .010 (0.25 mm) in zone P. This zone is controlled for automatic handling.
6. Leads at gauge plane .054 inch (1.37 mm) +.001 inch (0.03 mm) -.000 inch (0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) relative to tab. Device may be measured by direct methods or by gauge.
7. Symbol LD applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum.
8. Lead number three is electrically connected to case.
9. Beyond r maximum, TW shall be held for a minimum length of .011 inch (0.28 mm).
10. Symbol r applied to both inside corners of tab.
11. Measured in a zone beyond .250 (6.35 mm) from the seating plane.
12. Measured in the zone between .050 (1.27 mm) and .250 (6.35 mm) from the seating plane.
13. In accordance with ANSI Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 1. Physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500 and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.3 Interface requirements and physical dimensions. The Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and figure 1 herein.

3.3.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.6 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.7 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.5).

4. VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANTX and JANTXV levels only). Screening shall be in accordance with table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement JANTX and JANTXV levels
9	Not applicable
10	V_{CB} = 12 V
11	h_{FE2} and I_{CEX2}
12	See 4.3.1
13	Subgroup 2 of table I herein, ΔI_{CEX2} = 100 percent of initial value or 20 nA dc, whichever is greater. Δh_{FE2} = 20 percent of initial value.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows: $T_A = 25°C \pm 3°C$; V_{CB} = 10 V dc; P_T = 400 mW.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, group A, subgroup 2 herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and paragraph 4.4.2.1 herein. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, group A, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

Subgroup	Method	Condition
B3	1027	V_{CB} = 10 V dc, adjust P_T to achieve $T_J = 150°C$ minimum, $T_A = 25°C \pm 5°C$
B4	2037	Test condition A
B6	1032	$T_{STG} = 200°C$

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein. Delta measurements shall be in accordance with table II herein.

Subgroup	Method	Condition
C2	1056	Test condition A
C2	2036	Test condition E
C6	1026	$T_A = 25°C \pm 5°C$, V_{CB} = 10 V dc, adjust P_T to achieve $T_J = 150°C$ minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Breakdown voltage, collector to emitter	3001	Bias condition D, I_C = 10 µA dc	$V_{(BR)CBO}$	20		V dc
Breakdown voltage, emitter to base	3026	Bias condition D, I_C = 10 µA dc	$V_{(BR)EBO}$	4.5		V dc
Breakdown voltage, collector to emitter	3011	Bias condition D, I_C = 10 µA dc, pulsed (see 4.5.1)	$V_{(BR)CEO}$	12		V dc
Collector to emitter cutoff current	3041	Bias condition A; V_{CE} = 10 V dc, V_{BE} = 0.4 V dc	I_{CEX1}		1.0	µA dc
Collector to emitter cutoff current	3041	Bias condition A; V_{CE} = 10 V dc, V_{BE} = 2.0 V dc	I_{CEX2}		5.0	nA dc
Forward-current transfer ratio	3076	V_{CE} = 1 V dc; I_C = 1.0 mA dc;	h_{FE1}	40		
Forward-current transfer ratio	3076	V_{CE} = 1 V dc; I_C = 10 mA dc, pulsed (see 4.5.1)	h_{FE2}	60	300	
Forward-current transfer ratio	3076	V_{CE} = 1 V dc; I_C = 30 mA dc; pulsed (see 4.5.1)	h_{FE3}	30		
Collector to emitter saturated voltage	3071	I_C = 1.0 mA dc; I_B = 0.1 mA dc	$V_{CE(sat)1}$		0.2	V dc
Collector to emitter saturated voltage	3071	I_C = 30 mA dc; I_B = 3.0 mA dc, pulsed (see 4.5.1)	$V_{CE(sat)2}$		0.3	V dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued						
Base emitter voltage (nonsaturated)	3066	Test condition B, V_{CE} = 1.0 V dc, I_C = 1.0 mA dc	V_{BE1}		0.8	V dc
Base emitter voltage (nonsaturated)	3066	Test condition B, V_{CE} = 1.0 V dc, I_C = 30 mA dc	V_{BE2}		1.0	V dc
Subgroup 3						
High-temperature operation:		T_A = +150°C				
Collector to emitter cutoff current	3041	Bias condition A; V_{CE} = 10 V dc, V_{EB} = 2 V dc	I_{CEX3}		5.0	µA dc
Low-temperature operation:		T_A = -55°C				
Forward-current transfer ratio	3076	V_{CE} = 1.0 V dc; I_C = 10 mA dc; pulsed (see 4.5.1)	h_{FE4}	30		
Subgroup 4						
Magnitude of common emitter small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 4 V dc; I_C = 5.0 mA dc; f = 100 MHz	$\|h_{fe1}\|$	13		
Magnitude of common emitter small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 4 V dc; I_C = 10 mA dc; f = 100 MHz	$\|h_{fe2}\|$	14		
Magnitude of common emitter small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 4 V dc; I_C = 30 mA dc; f = 100 MHz	$\|h_{fe3}\|$	12		

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 4 - Continued						
Open circuit output capacitance	3236	V_{CB} = 4 V dc; I_E = 0; 100 kHz ≤ f ≤ 1 MHz	C_{obo}		2.5	pF
Input capacitance (output open-circuited)	3240	V_{EB} = 0.5 V, I_C = 0, 100 kHz ≤ f ≤ 1 MHz	C_{ibo}		2.5	pF
Subgroups 5, 6, and 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

TABLE II. Groups A, B, and C delta measurements. 1/

Step	Inspection	MIL-STD-750		Symbol	Limit		Unit
		Method	Conditions		Min	Max	
1.	Forward current transfer ratio	3076	V_{CE} = 1.0 V dc; I_C = 10 mA dc; pulsed (see 4.5.1)	Δh_{FE2}	±20 percent change from initial value		

1/ The delta measurements for table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 are as follows: Subgroup 6, see table II herein, step 1.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows:

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.2.1).

b. Lead finish (see 3.3.1).

c. Type designation and product assurance level.

d. Packaging requirements (see 5.1).

6.3 Substitution information. Devices form this specification supersedes the following commercial Part or Identifying Number (PIN). This information in no way implies that manufacturers' PIN's are suitable as a substitute for the military PIN.

Military PIN	Manufacturers' CAGE code	Manufacturers' and users' PIN
2N3960JTX	04713	SRF5218H
2N3960JTXV	04713	SRFE1032H
		SRF1353H
		SRF2273H, ML0203-0093
		SRF3698H, 8A39-001CHD
		SRF5277H, 8A39-01CHA
		SRF671H, 48-T05996F201
		SRF7052H, 169869-101

6.3.1 JAN replacement. For JAN replacement see QML-19500, section 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.5 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army – AR, MI
Air Force - 19
Navy - AS, CG, MC

Preparing activity:
DLA - CC

(Project 5961-2128)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/399B	2. DOCUMENT DATE *(YYYYMMDD)*

3. DOCUMENT TITLE

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, SWITCHING TYPE 2N3960, JAN, JANTX, AND JANTXV.

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(If applicable)*	7. DATE SUBMITTED *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME Alan Barone	b. TELEPHONE *(Include Area Code* (1) Commercial 614-692-0510 (2) DSN 850-0510
c. ADDRESS *(Include Zip Code)* DSCC-VAC 3990 East Broad Street Columbus, Ohio 43216-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703)767-6888 DSN 427-6888

DD Form 1426, FEB 1999 (EG) PREVIOUS EDITIONS ARE OBSOLETE.
WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:33Z
Check the source to verify that this is the current version before use.