The documentation and process conversion measures necessary to comply with this revision shall be completed by 30 October 1999.

INCH-POUND

MIL-PRF-19500/404C
30 July 1999
SUPERSEDING
MIL-PRF-19500/404B
15 November 1991

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, RECTIFIER, MODULE
HIGH VOLTAGE, 1N5597, 1N5600, 1N5603,
JAN, JANTX AND JANTXV

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, high voltage, rectifier modules. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1.

1.3 Maximum ratings.

Types	$V_{BR(CEO)}$	V_{RWM}	I_O T_C = 75°C	I_{FSM} T_C = 75°C	t_{rr}	$I_{R(surge)}$ T_C = 75°C	T_J and T_{STG}	I_F
	kV dc	kV (pk)	A dc	A dc	µs	J	°C	A dc
1N5597	10	10	1.0 1/	30	2	2	-55 to +150	1.0
1N5600	5	5	2.0 2/	80	2	6	-55 to +150	2.0
1N5603	5	5	5.0 3/	200	2	12	-55 to +150	5.0

1/ Derate linearly by 13.3 mA dc/°C from I_O = 1.0 A dc at T_C = +75°C. Derate to zero at T_C = +150°C.
2/ Derate linearly by 26.7 mA dc/°C from I_O = 2.0 A dc at T_C = +75°C. Derate to zero at T_C = +150°C.
3/ Derate linearly by 66.7 mA dc/°C from I_O = 5.0 A dc at T_C = +75°C. Derate to zero at T_C = +150°C.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. at T_A = 25°C unless otherwise specified.

Types	V_F I_F = rated I_F (see 1.3)		I_{R1} V_R = rated V_{RWM} (see 1.3)		T_A = +100°C I_{R2} V_R = rated V_{RWM} (see 1.3)		C V_R = 100 V dc f = 0.1 to 0.15 MHz	
	V dc		µA dc		µA dc		pF	
	Min	Max	Min	Max	Min	Max	Min	Max
1N5597	13	19		1		75	5	30
1N5600	6	10		5		100	7	30
1N5603	6	10		5		100	15	40

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, Building 4D (NPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.


AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D1868 - Method of Corona Measurement.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

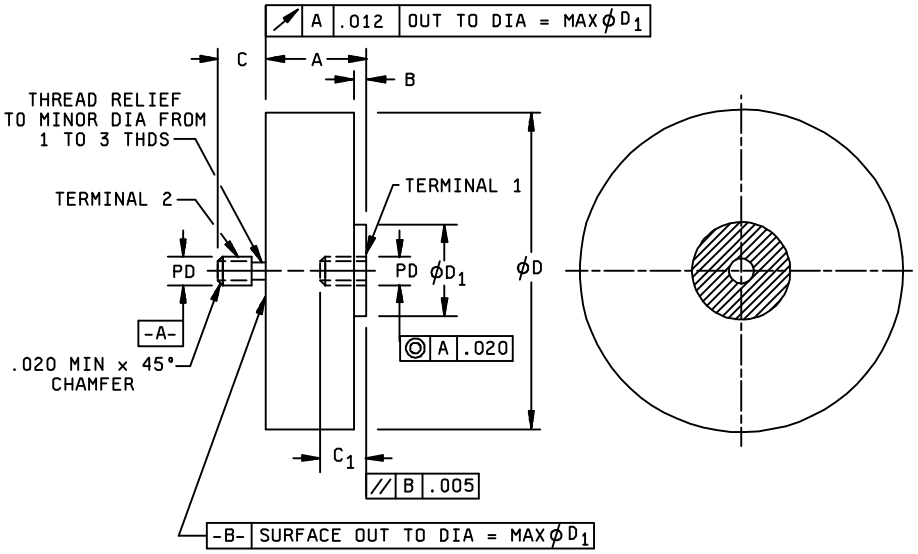

TYPE 1N5603

Ltr	Dimension				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A	.970	1.020	24.64	25.91	14
B	.050	.080	1.27	2.03	
C	.307	.317	7.80	8.05	7, 12
C_1	.318	.400	8.08	10.16	9, 11, 12
ϕD	3.450	3.650	87.63	92.71	
ϕD1	.95	1.250	24.13	31.75	11, 13

TYPES 1N5600 and 1N5597

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A	.73	.83	18.54	21.08	14
B	---	.080	---	2.03	
C	.240	.264	6.10	6.71	6, 10, 12
C_1	.265	.400	6.73	10.16	8, 12
ϕD	1.85	1.95	46.99	49.53	
ϕD1	.57	.67	14.48	17.02	13

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Surface roughness of all external metal surfaces except threaded areas shall not exceed 63 microinches rms.
4. Threaded portions of the assembly shall be in accordance with NBS handbook H28 (screw thread standards for federal services, 1957). The maximum pitch diameter of plated threads shall be the basic pitch diameter.
5. All marking shall be on cathode side of module.
6. Threaded stud .250-28UNF-2A.
7. Threaded stud .375-24UNF-2A.
8. Threaded insert .250-28UNF-2B.
9. Threaded insert .375-24UNF-2B.
10. Cathode connected to terminal 2.
11. Cathode connected to terminal 1.
12. Full length thread.
13. Metal terminal contact surface.
14. Module contour within dimension A is not specified.

FIGURE 1. Semiconductor device, diode module.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500 and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.3 Interface requirements and physical dimensions. The Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and herein.

3.3.1 External construction. Metal surfaces shall be nickel plated in accordance with QQ-N-290 (class 2; type I (DS), type V (FC), or type VIII (FZ)) or MIL-C-26074 (class 3, grade A). Plastic surfaces shall be finished smooth, free of pits, cracks, and other imperfections.

3.3.2 Internal construction. The rectifier module shall contain an assembly of series-connected discrete controlled avalanche diodes (arbitrarily designated D-1, D-2, and D-3 in the tables). Each diode shall be in a glass-to-metal, ceramic-to-metal, or fused metal oxide-to-metal hermetically sealed non-cavity package. The completed assembly of diodes and other internal structures shall be encapsulated in a plastic material which polymerizes to a rigid condition by virtue of a chemical cross-linking mechanism. The rectifier module shall be free of voids either visible or as evidenced by failure to pass the environmental corona test specified. The rectifier module shall not internally include or utilize component capacitors and/or resistors for compensation. Only those discrete diodes which have passed the tests in 4.3 tables I and II shall be used in the rectifier module. Discrete diodes shall be manufactured and tested by the rectifier module manufacturer.

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500. As an option to the polarity marking requirements, the words "cathode terminal" may be used.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.6 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I

3.7 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.4).

4. VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and table IV herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANTXV and JANTX levels only). Screening shall be in accordance with table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable. Screening shall be conducted on 100 percent of the discrete diode lot prior to assembly and encapsulation into rectifier modules.

Screen (see table IV of MIL-PRF-19500)	Measurement
	JANTX and JANTXV levels
1/	Surge, see 4.3.2.
2/	All tests of tables I and II
9	Not applicable
11	V_{F1} and I_{R1}
12	See 4.3.1
13	ΔV_{F1} = +0.1/-0.2 V dc ΔI_{R1} = 250 nA dc or 100 percent of initial value, whichever is greater, for 1N5597 and 1N5660. ΔI_{R1} = 500 nA dc or 100 percent of initial value, whichever is greater, for 1N5603.

1/ Surge screening shall be performed anytime after screen 3 and before screen 10.
2/ See tables I and II.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows:

T_A = +125°C, V_R at rated (dc), I_F = 0

4.3.2 Surge screening. See MIL-STD-750, method 4066. V_{RWM} = 0, I_O = 0, I_{FSM} apply 20 x I_O rated at T_A = +75°C, 8.3 ms, 3 surges, T_A = 75°C or rectangular pulse of equivalent I_{RMS}, duty factor = 1 percent maximum.

4.3.3 Internal corona screening. This 100 percent test shall be performed in accordance with 4.5.4 herein on the finished module.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspections shall be conducted in accordance with MIL-PRF-19500, and table III herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and paragraph 4.4.2.1 herein. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

4.4.2.1 Group B inspection, table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
2	4066	V_{RWM} = 0 V, I_{FSM} = (see 1.3) ten surges, 8.3 ms I_0 = I_0 rated at +75°C
3	1036	Intermittent life test (Up to 6 modules may be series connected and horizontally mounted in a dielectric fluid such as 3M's FC40 or equivalent, or oil in accordance with VV-I-530, controlled to maintain a case temperature of 75°C minimum.) Time on = 50 min, time off = 10 min, duration = 340 cycles (340 hours). (For determining sample size, each module shall be considered a test unit with resistive load.) I_0 during time on: 1N5597 - 1 A dc 1N5600 - 2 A dc 1N5603 - 5 A dc
4	---	Not applicable
5	---	Not applicable
6	1031	T_A = +150°C

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein.

Subgroup	Method	Condition
2	2036	Test condition A, t = 3 s; torque for 1N5597 & 1N5600 = 18 pound-inches; torque for 1N5603 = 36 pound-inches.
3	---	Not applicable
4	1041	Reject criteria, a device with illegible marking, evidence of flaking or pitting or corrosion that will interfere with the application of the device will be considered a failure.
5	---	Not applicable
6	1036	Intermittent life test (Up to 6 modules may be series connected and horizontally mounted in a dielectric fluid such as 3 M's FC40 or equivalent, or oil in accordance with VV-I-530, controlled to maintain a case temperature of 75°C minimum.) Time on = 50 minutes, time off = 10 minutes, duration 1,000 cycles (1,000 hours). (For determining sample size, each module shall be considered a test unit with resistive load.) I_0 during time on: 1N5597 - 1 A dc 1N5600 - 2 A dc 1N5603 - 5 A dc

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with table VI herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Reverse recovery time. Reverse recovery time shall be measured in a circuit and with equipment as shown on figure 2. The pulse generator shall have a pulse repetition frequency of 1 kHz maximum, and a pulse width of 10 microseconds minimum. Recovery conditions: 0.5 ampere forward current to 1.0 ampere reverse current. Recovery time measured from the time the rectifier begins to conduct in the reverse direction (crosses I = 0) until the reverse current recovers to -0.25 ampere.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

4.5.3 Peak transient reverse power. The circuit on figure 3 or a similar circuit, at the option of the supplier, shall be used to apply a single cycle reverse power surge to discrete diodes. The reverse power surge used to test discrete diodes may be applied in the form of a one-half sinusoidal pulse of 8.3 milliseconds duration.

4.5.4 Internal corona testing. Internal corona testing shall be conducted on all rectifier modules (see figure 4). The method of corona detection, measurement and display shall conform to the following requirements:

The terminals shall be connected together and connected to the high potential side of the corona test equipment. A test voltage of 25 kV(rms) at 60 Hz shall be applied between the terminals and the ground plane which shall be no more than 2 inches from the major diameter of the rectifier module. The test potential shall be applied for not less than 20 seconds. The corona tester shall be a Biddle Company Catalog No. 661409 AC Corona Tester, or equivalent. The corona discharge as viewed on the Biddle tester display screen shall show no more than 50 discharges per cycle (whole ellipse). None of the 50 discharges shall exceed 5 picocoulombs. In order to minimize the masking of internal corona by any external corona, rounded terminal hardware of suitable design may be added to the connectors during the corona test. In addition, the test may be performed with the unit either entirely or partially immersed in a suitable dielectric fluid in order to reduce external corona.

4.5.5 External corona testing. The method of corona detection, measurement and display shall conform to the requirements of ASTM D1868. The apparatus shall consist of a corona-free high-voltage adjustable power supply, a corona-free pickup network consisting of a high-pass filter, a corona detector consisting of a high-gain amplifier/oscilloscope, and a calibrating means to make quantitative measurement of corona magnitude in picocoulombs. Using the scheme shown on figure 5, an external corona test shall be conducted on two diode modules of the same rating connected in opposition from 0 V to the required test voltage of:

20 kV(peak) = 14.14 k V_{rms} for diode module type 1N5597.

10 kV(peak) = 7.07 k V_{rms} for diode module types 1N5600 and 1N5603.

With a corona detector sensitivity of 1 picocoulomb per 0.1-inch minimum, no corona discharges exceeding 5 picocoulombs shall be visible for types 1N5597 and 1N5600 and no corona discharges exceeding 15 picocoulombs shall be visible for type 1N5603. The number of detectable discharges shall not exceed 50 per cycle (whole ellipse).

4.5.6 Avalanche (bulk-breakdown) characteristic. The reverse breakdown characteristics shall be viewed on an oscilloscope with display calibration factors of 5 to 20 µA/division and 50 to 200 V/division. Reverse current over the knee shall be at least 50 µA. Each device shall exhibit a sharp knee characteristic and any discontinuity or dynamic instability of the trace shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

TABLE I. Discrete diode-process conditioning tests and measurements.

Inspection	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Peak transient reverse power D-1 D-2 D-3		See 4.5.3 single cycle surge; one-half sinusoidal wave 8.3 ms Surge = .17 J Surge = 1.00 J Surge = 2.00 J				

TABLE II. Discrete diodes-inspection test to verify sampling plan.

Inspection	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1		100 percent test				
Avalanche (bulk-breakdown characteristics)		See 4.5.6				
Subgroup 2						
Forward voltage	4011		V_{F2}			
D-1		I_F = 1.0 A dc			1.1	V dc
D-2		I_F = 2.0 A dc			1.0	V dc
D-3		I_F = 5.0 A dc			1.0	V dc
Reverse current	4016	DC method	I_{R1}			
1N5597		V_R = 600 V dc			1	µA dc
1N5600		V_R = 600 V dc			5	µA dc
1N5603		V_R = 600 V dc			5	µA dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)}$	660		V dc
Breakdown voltage	4021	I_R = 50 µA dc	$V_{(BR)}$		1,000	V dc
Subgroup 3						
Reverse recover time		See figure 2 and 4.5.2	t_{rr}		2	µs
Reverse current	4016	Dc method; T_A = 100°C, V_R = 600 V dc	I_{R2}			
D-1					75	µA dc
D-2					100	µA dc
D-3					100	µA dc

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection.

Inspection	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Forward voltage	4011		V_{F1}			
1N5597		I_F = 1.0 A dc		13	19	V dc
1N5600		I_F = 2.0 A dc		6	10	V dc
1N5603		I_F = 5.0 A dc		6	10	V dc
Reverse current	4016	DC method	I_{R1}			
1N5597		V_R = 10.0 kV dc			1	µA dc
1N5600		V_R = 5.0 kV dc			5	µA dc
1N5603		V_R = 5.0 kV dc			5	µA dc
Subgroup 3						
High temperature operation:		T_A = +100°C				
Reverse current	4016	DC method; V_R = rated V_{RWM} (see 1.3)	I_{R4}			
1N5597					75	µA dc
1N5600					100	µA dc
1N5603					100	µA dc

1/ See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Inspection	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3 - Continued						
Low temperature operation:		T_A = -55°C				
Forward voltage	4011					
1N5597		I_F = 1.0 A dc	V_{F3}	13	24	V dc
1N5600		I_F = 2.0 A dc		6	12	V dc
1N5603		I_F = 5.0 A dc		6	12	V dc
Subgroup 4						
Capacitance	4001	V_R = 100 V dc 0.1 MHz ≤ f ≤ 0.15 MHz	C			
1N5597				5	30	pF
1N5600				7	30	pF
1N5603				15	40	pF
Subgroups 5 and 6						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

TABLE IV. Group E inspection for (all quality levels) for qualification only.

Inspection	MIL-STD-750		Qualification conformance inspection
	Method	Conditions	
Subgroup 1			11 devices, c = 1
Thermal shock	1051	500 cycles, condition F	
Electrical measurements		See table V herein, steps 1 and 2	
Subgroup 2			11 devices, c = 1
Steady-State dc blocking life	1038	1,000 hours, condition A, except T_A = 100°C	
Electrical measurements		See table V herein, steps 1 and 2	
Subgroup 3			
Not applicable			
Subgroup 4			11 devices, c = 1
External corona 1/		See 4.5.5	
Flammability		MIL-STD-202, method 111, allowable burning time = 5 s. Point of impingement shall be midpoint of one side	
Subgroup 5			
Not applicable			

1/ Subgroup 1 samples may be used for this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.


TABLE V. Group E end-point electrical measurements 1/

Step	Inspection	MIL-STD-750		Symbol	Limit		Unit
		Method	Conditions		Min.	Max.	
1.	Forward voltage	4011		ΔV_{F1} 2/	-0.2	+0.1	V dc
2.	Reverse current	4016	DC method	ΔI_{R1} 2/			
	1N5597, 1N5600					250 nA or 100 percent of initial value, whichever is greater	
	1N5603					500 nA dc or 100 percent of initial value, whichever is greater.	

1/ The electrical measurements for table IV herein are as follows:
Subgroups 1 and 2, see table V herein, steps 1 and 2.

2/ Devices which exceed the group A limits for this test shall not be accepted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

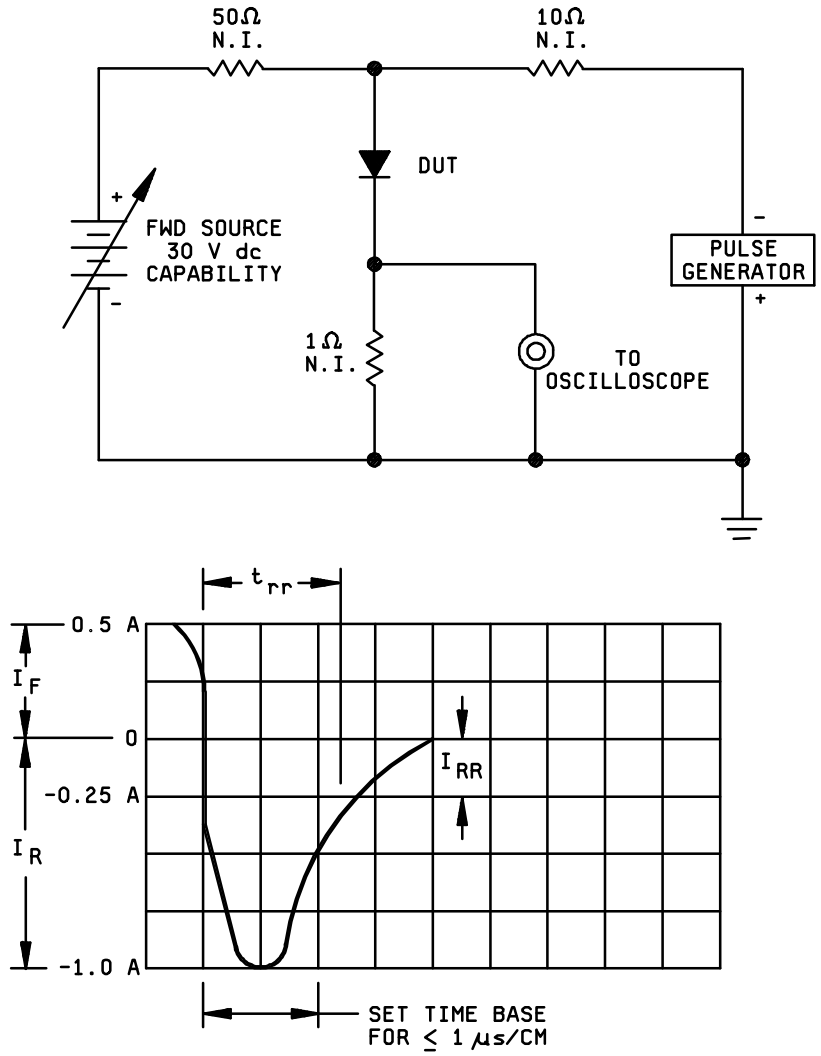

NOTES:

1. Oscilloscope-rise time ≤ 7 ns; input impedance = 1 MΩ; 22 pF.
2. Pulse generator - rise time ≤ 10 ns; source impedance = 50Ω.
3. Recovery time shall be measured on the above circuit and with equipment as shown. The pulse generator shall have a pulse repetition frequency of 1 kHz and a pulse width of 200 ns recovery conditions 125 mA forward current to .250 mA reverse current. Recovery time measured when rectifier recovers to 63 mA.

FIGURE 2. Reverse recovery time test circuit and characteristic nomograph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

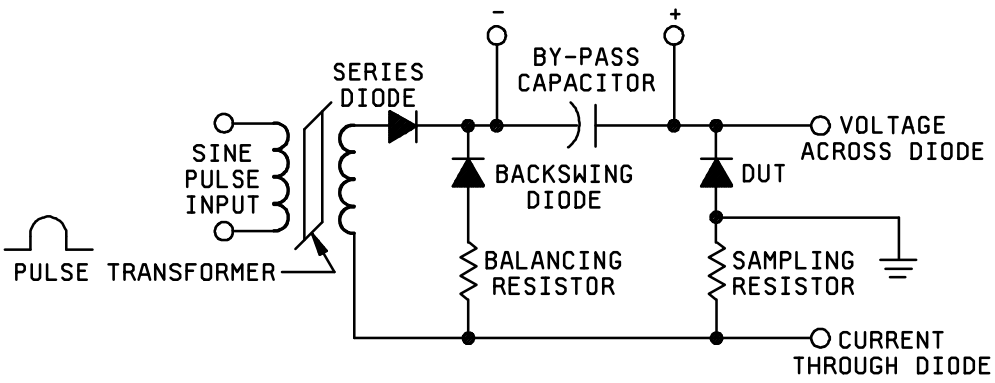


FIGURE 3. Peak transient reverse power test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

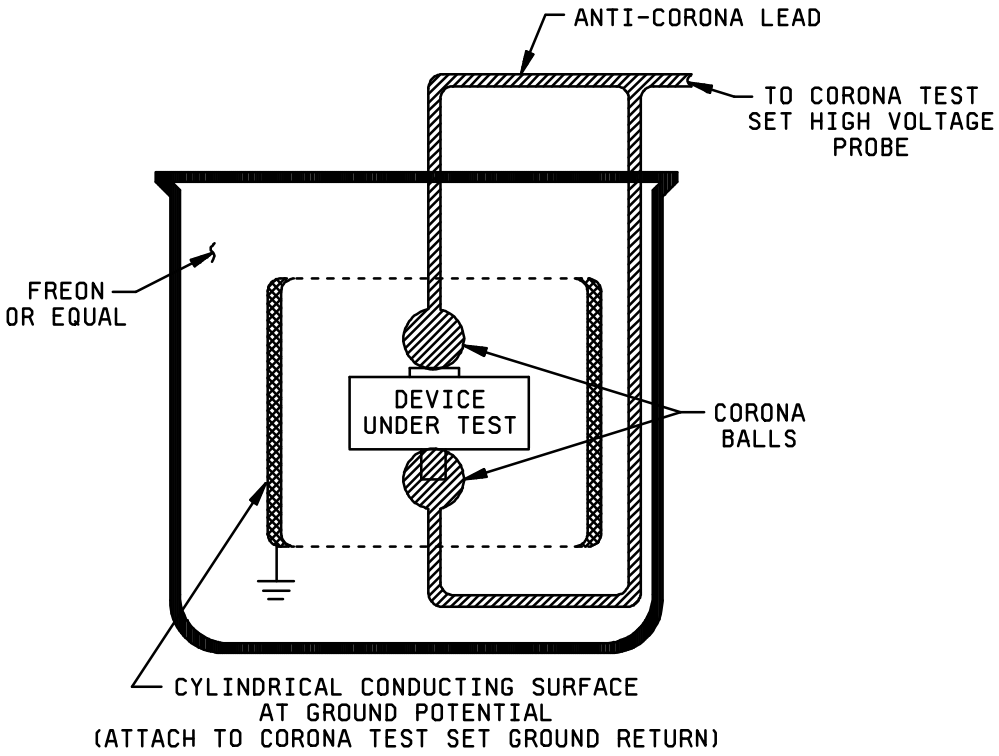


FIGURE 4. Internal corona test scheme.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

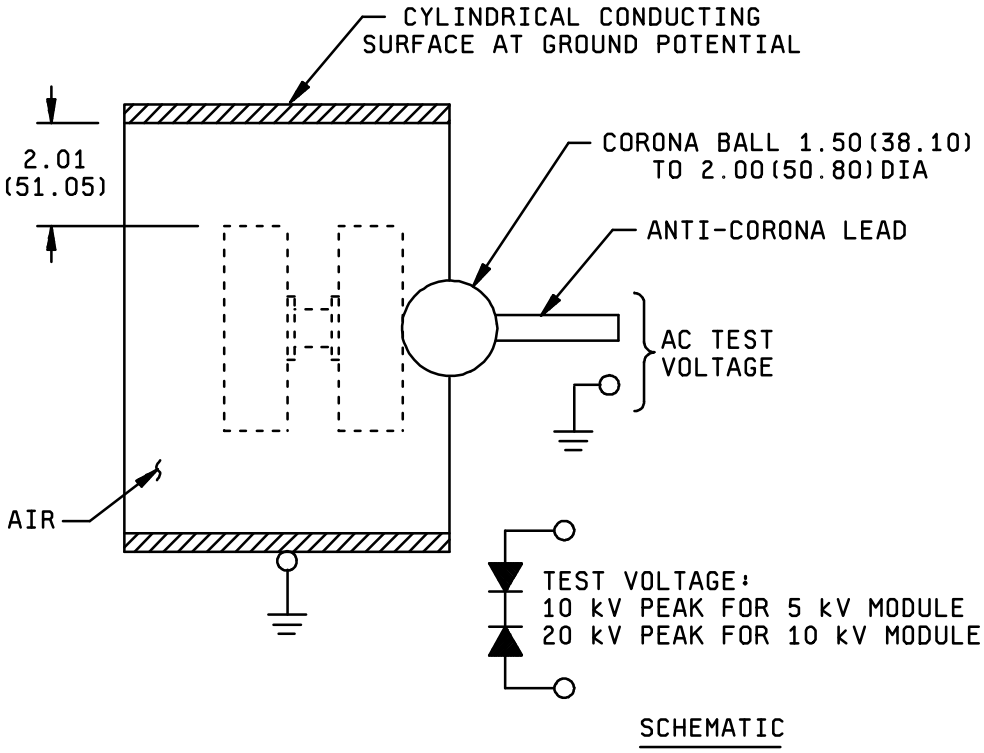


FIGURE 5. External corona test scheme.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Air Force - 70, 80
Navy - AS, CG, MC, OS

Preparing activity:
DLA - CC

(Project 5961-1911)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/404C	2. DOCUMENT DATE 99/07/30

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, DIODE, SILICON, RECTIFIER, MODULE HIGH VOLTAGE, 1N5597, 1N5600, 1N5603, JAN, JANTX AND JANTXV

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. Point of Contact Alan Barone	b. TELEPHONE Commercial: 614-692-0510 DSN: 850-0510 FAX: 614-692-6939 EMAIL: alan_barone@dscc.dla.mil
c. ADDRESS Defense Supply Center Columbus ATTN: DSCC-VAC Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC -LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvior, Virginia 22060-6221 Telephone (703) 767-6888 DSN 427-6888

DD FORM 1426, FEB 99 (EG) PREVIOUS EDITIONS ARE OBSOLETE WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:34Z
Check the source to verify that this is the current version before use.