
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army ME, AM, WC; Navy MC, OS; Air Force

Reviewer activities: Army MI, AT; Navy AS; Air Force 11, 80

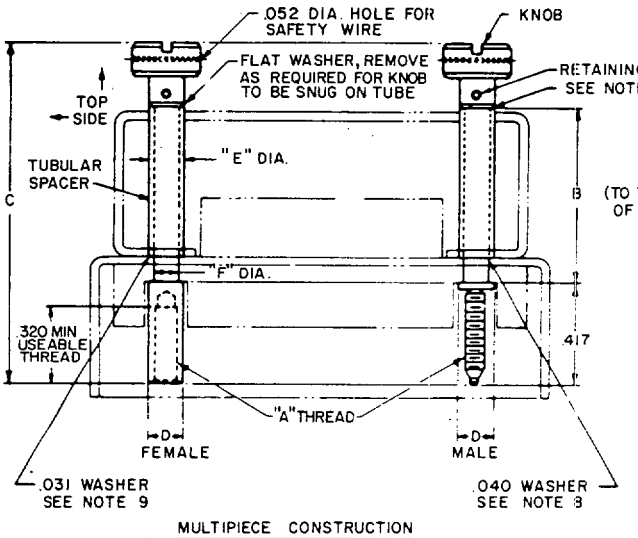

MULTIPIECE CONSTRUCTION

FED. SUP CLASS 5935

INCHES	MM
.003	.08
.004	.10
.016	.41
.031	.79
.040	1.02
.052	1.32
.115	2.92
.137	3.48
.138	3.51
.164	4.17
.188	4.78
.190	4.83
.219	5.56
.225	5.72
.320	8.13
.417	10.59
1.500	43.10
2.467	62.66
2.495	63.37
3.438	87.33

MS PART NO.	CONNECTOR SIZE (NO. OF CONTACTS)	STYLE	"A" THREAD	"B" ±.016	"C" MAX	"D" DIA MAX	"E" DIA. ±.004	"F" DIA. ±.003
MS18194-1	7, 9, 14, 20, 26, 34, 42, 50, 66, 75	MALE	.138-32 UNC	1.500	2.467	.190	.188	.115
MS18194-2	7, 9, 14, 20, 26, 34, 42, 50, 66, 75	FEMALE	.138-32 UNC	1.500	2.467	.190	.188	.115
MS18194-3	104	MALE	.164-32 UNC	2.495	3.438	.225	.219	.137
MS18194-4	104	FEMALE	.164-32 UNC	2.495	3.438	.225	.219	.137

For use with MS18192-1 thru -9, MS18193-1 and 2 and MS 24133-1 thru -4 shields and MS18203-1 thru -10 and MS18204-1 thru -10 shells.

DESIGN STANDARD FOR USE WITH MIL-C-28748 CONNECTORS.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Material: Corrosion resitance steel per specification QQ-S-763 or QQ-S-764, class 302, 303, 303Se, 304 or 316 except for aluminum alloy knob and tubular, spacer, on multipiece construction.
5. Finish: Passivated per QQ-P-35 except for anodized knob on multipiece construction.
6. Lubricant: Solid film lubricant or 'A' thread conforming to MIL-L-46010.
7. Packaging: Parts to be bagged disassembled on multipiece construction.
8. Washer .040 (1.02 mm) thick, supplied with all sizes, not used with shell.
9. Washer .031 (.79 mm) thick, supplied with -1 and -2 not used with shields 20 and smaller.
10. Referenced documents shall be of the issue in effect on date of invitation for bid.
11. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
12. Patent notices:
    (a) Patent No. 2,761,108 owned by US Components Incorporated. The Government has a royalty-free license under the above patents for the benefit of manufacturers of the items called-for in this military standard, either for the Government or for use in equipment to be delivered to the Government.
    (b) The Government does not have a royalty free licence under patent No. 2,746,022, owned by the Continental Connector Corporation, which patent will expire as of 15 May 73.

REDARWN

Ⓓ ENTIRE STANDARD REVISED

APPROVED 20 DEC 65 REVISED Ⓓ 11 APR 1974


P.A. Navy-EC Other Cust AF-85 Army-EL	International interest	TITLE JACKSCREW, ELECTRICAL CONNECTOR MALE AND FEMALE, LONG, TURNABLE	MILITARY STANDARD MS 18194
Procurement Specification MIL-C-28748		SUPERSEDES:	PAGE 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-1937-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

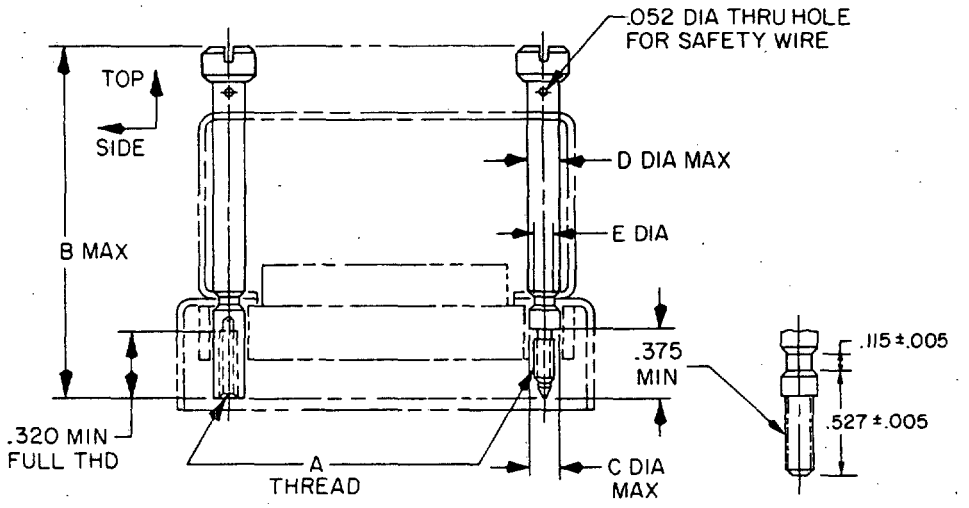

ONE PIECE CONSTRUCTION

INCHES	MM
.005	.13
.052	1.32
.115	2.92
.320	8.13
.375	9.53
.527	13.39

MS PART NUMBER	CONNECTOR SIZE (NO. OF CONTACTS)	STYLE	"A" THD	"B" MAX	"C" DIA MAX.	"D" DIA. MAX.	"E" DIA. ±.002 (.05)
MS18194-5	34, 42, 50, 66, 75	MALE	.138-32 UNC	2.438 (61.93)	.192 (4.88)	.192 (4.88)	.111 (2.82)
MS18194-6	34, 42, 50, 66, 75	FEMALE	.138-32 UNC	2.438 (61.93)	.192 (4.88)	.192 (4.88)	.111 (2.82)
MS18194-7	104	MALE	.164-32 UNC	3.282 (83.36)	.225 (5.72)	.225 (5.72)	.140 (3.56)
MS18194-8	104	FEMALE	.164-32 UNC	3.282 (83.36)	.225 (5.72)	.225 (5.72)	.140 (3.56)

For use with MS18192-10 thru -13, MS18193-3 and -4 and MS24133-9 thru -12 shields or MS18203-11 thru -16 and MS18204-11 thru -16 shells.

When MS18203-11 thru -16 or MS18204-11 thru -16 shells are required to be used with a shield, use MS18192-1 thru -9 or MS18193-1 or -2 shield.

APPROVED 20 DEC 65 REVISED Ⓓ ENTIRE STANDARD REVISED

User activities: Army ME, AM, WC; Navy MC, OS; Air Force

Reviewer activities: Army MI, AT; Navy AS; Air Force 11, 80

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy-EC	International interest	TITLE	MILITARY STANDARD
Other Cust AF-85 Army-EL		JACKSCREW, ELECTRICAL CONNECTOR MALE AND FEMALE, LONG, TURNABLE	MS 18194
Procurement Specification MIL-C-28748		SUPERSEDES:	PAGE 2 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-1937-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.