
QUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-F-18280

Form approved
OMB No. 0704-0188

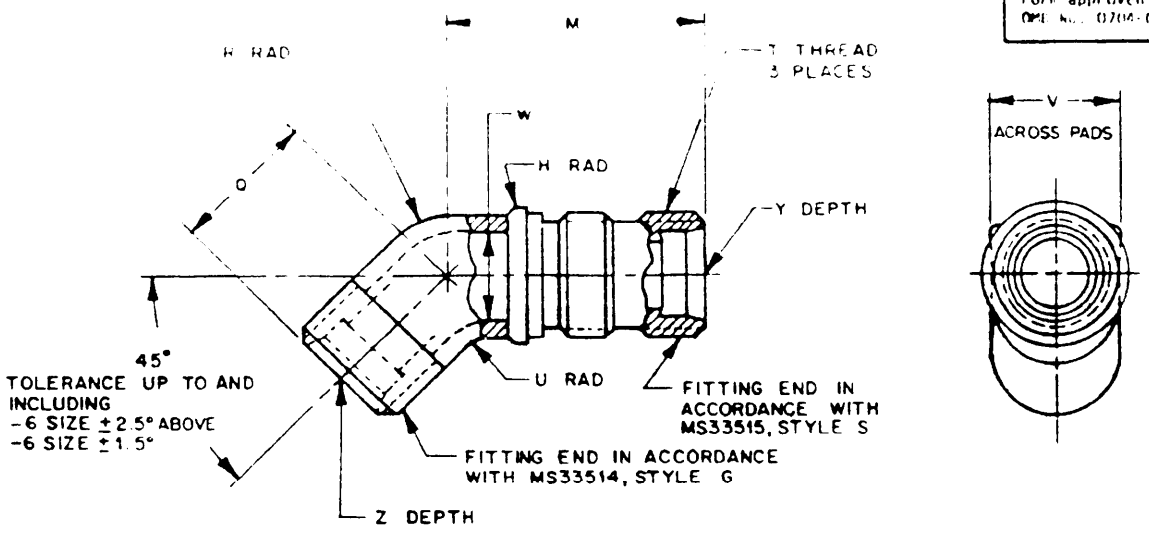

DASH NO.	TUBE OD	T THREAD MIL-S-8879	H RAD	M +.047 -0	Q +.047 -0	R RAD	U RAD	V	W APPROX	Y +.047 -0	Z +.047 -0	WT LB MAX STEEL	AL ALLOY	TI ALLOY
-2	1/8	.3125-24 UNJF-3A	.062	1.281	.625	.156	.062	.312	.219	1.281	.641	.035	.015	.020
-3	3/16	.3750-24 UNJF-3A		1.328	.656	.187		.375		1.359	.687	.051	.018	.029
-4	1/4	.4375-20 UNJF-3A		1.453	.687	.219		.437	.312	1.484	.719	.059	.024	.034
-5	5/16	.5000-20 UNJF-3A	.094		.719	.250		.500		1.500	.797	.098	.035	.056
-6	3/8	.5625-18 UNJF-3A		1.562	.812	.281	.094	.562	.375	1.625	.875	.104	.039	.060
-8	1/2	.7500-16 UNJF-3A		1.812	.969	.375		.750	.500	1.859	1.078	.212	.072	.122
-10	5/8	.8750-14 UNJF-3A		2.047	1.062	.437		.875	.625	2.125	1.156	.305	.109	.175
-12	3/4	1.0625-12 UNJ -3A		2.250	1.250	.531		1.062	.750	2.375	1.375	.493	.171	.284
-16	1	1.3125-12 UNJ -3A	.125	2.375	1.344	.656	.125	1.312	1.000	2.547	1.516	.670	.255	.386
-20	1-1/4	1.6250-12 UNJ -3A		2.406	1.437	.812		1.625	1.250	2.641	1.656	1.100	.410	.634
-24	1-1/2	1.8750-12 UNJ -3A		2.422	1.531	.937		1.875	1.500	2.687	1.797			
-32	2	2.5000-12 UNJ -3A		2.578	1.812	1.250	.250	2.562	2.000	2.703	2.187			

REQUIREMENTS:

1. MATERIAL: CARBON STEEL - FORGINGS
   ALUMINUM ALLOY - FORGINGS
   CORROSION RESISTANT STEEL - FORGINGS
   TITANIUM ALLOY - FORGINGS
   } SEE PROCUREMENT SPECIFICATION
   NOTE: PARTS MADE FROM 1137 OR 1141 FORGINGS QUALIFIED TO MIL-F-18280C SHALL NOT BE SUPPLIED AFTER 30 JUNE 1984.

2. FINISH: SEE PROCUREMENT SPECIFICATION.

NOTES:

1. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.

2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.

3. PART NUMBERS:
   NO CODE LETTER IN PART NUMBER FOR CARBON STEEL.
   ADD "D" IN PLACE OF DASH FOR ALUMINUM ALLOY (2014).
   ADD "W" IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).
   ADD "J" IN PLACE OF DASH FOR CORROSION-RESISTANT STEEL, TYPE 304.
   ADD "K" IN PLACE OF DASH FOR CORROSION-RESISTANT STEEL, TYPE 316.
   (G) ADD "R" AFTER DASH FOR CORROSION-RESISTANT STEEL, TYPE 321.
   ADD "T" AFTER DASH FOR TITANIUM ALLOY (6AL-4V).
   EXAMPLES OF PART NUMBERS:
   MS21907-4 - ELBOW, 1/4 TUBING, CARBON STEEL.
   MS21907D4 - ELBOW, 1/4 TUBING, ALUMINUM ALLOY (2014).
   MS21907W4 - ELBOW, 1/4 TUBING, ALUMINUM ALLOY (7075).
   MS21907J4 - ELBOW, 1/4 TUBING, CORROSION-RESISTANT STEEL, TYPE 304.
   MS21907K4 - ELBOW, 1/4 TUBING, CORROSION-RESISTANT STEEL, TYPE 316.
   MS21907-4R - ELBOW, 1/4 TUBING, CORROSION-RESISTANT STEEL, TYPE 321.
   MS21907-4T - ELBOW, 1/4 TUBING, TITANIUM ALLOY (6AL-4V).

(G) DENOTES CHANGES

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-AV NAVY-
AIR FORCE-99 DLA-
REVIEW: AF-82, 71, ARMY-AV, MI, DLA-CS
USER: ARMY-GL, CR, ME, AT
PROJECT NUMBER: 4730-0143

MILITARY SPECIFICATION SHEET

TITLE

ELBOW, BULKHEAD UNIVERSAL, 45°, FLARELESS TUBE

SPECIFICATION SHEET NUMBER
MS21907G 20 JUNE 1991

SUPERSEDING
MS21907F 31 JULY 1990

AMSC- N/A FSC 4730

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

GARDEN STATE REPRODUCTIONS

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:40Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-F-18280

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

4. ITEMS CODED "C" ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. UNLESS OTHERWISE SPECIFIED, PARTS CODED "J", "K", OR "R" (AT SUPPLIER'S OPTION) SHALL BE FURNISHED IN LIEU OF "C" CODED PARTS.

5. TITANIUM NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.

6. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 347 CRES AFTER 31 MAY 1992. HOWEVER, TYPE CODE "S" PARTS MAY BE USED UNTIL EXISTING STOCKS ARE DEPLETED.

IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

PREPARING ACTIVITY: NAVY - AS
CUSTODIANS: ARMY - AV NAVY - AS
AIR FORCE - 99 DLA
REVIEW: AF - 82, 71, ARMY - AV, MI, DLA - CS
USER: ARMY - GL, CR, ME, AT
PROJECT NUMBER: 4730 - 0143

MILITARY SPECIFICATION SHEET

TITLE

ELBOW, BULKHEAD UNIVERSAL, 45°, FLARELESS TUBE

SPECIFICATION SHEET NUMBER
MS21907G 20 JUNE 1991
SUPERSEDING
MS21907F 31 JULY 1990
AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:40Z
Check the source to verify that this is the current version before use.