
USER SYMBOLS:


REVIEWER SYMBOLS:
ARMY – AV
US AF – 11 AND 71
NAVY – AS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

FED. SUP CLASS
1660

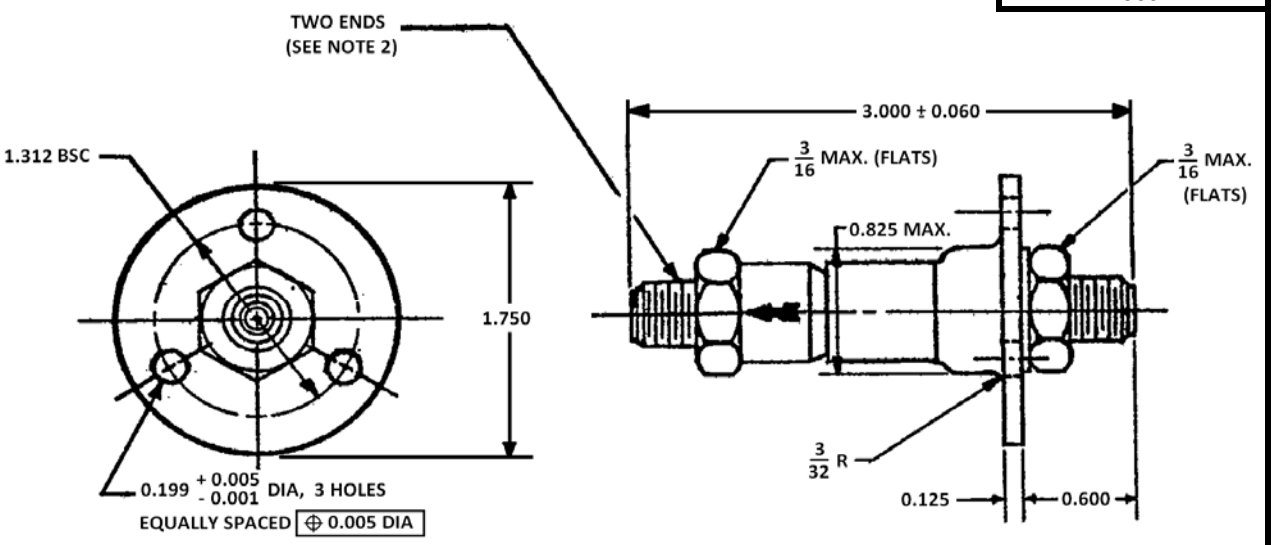

STYLE F

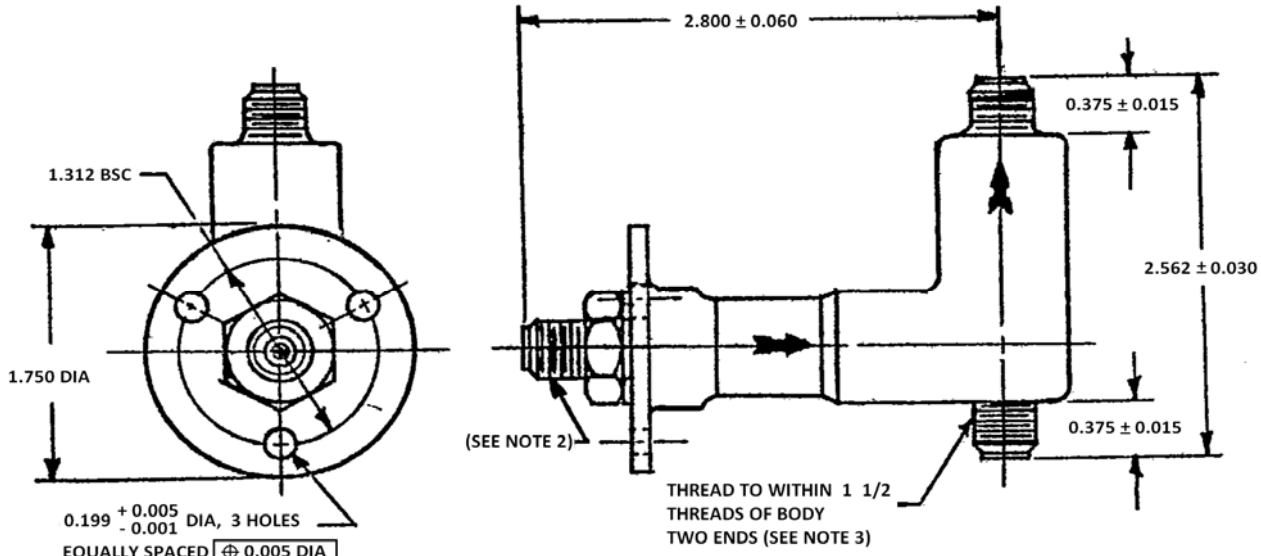

STYLE G

DASH NO.	STYLE
- 1	F
- 2	G

NOTE:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMAL ± 0.020.
2. FITTING ENDS SHALL BE IN ACCORDANCE WITH AND10089, STYLE E, SIZE NO .3 (NO THREAD RELIEF).
3. FITTING ENDS SHALL BE IN ACCORDANCE WITH AND10089, STYLE G, SIZE NO. 3 (NO THREAD RELIEF).
4. THE DIRECTION OF FLOW SHALL BE PERMANENTLY AND LEGIBLY MARKED WITH ARROWS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓑ **ENTIRE DRAWING REVISED**

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 5 JAN 59 REVISED Ⓐ 12 MARCH 1968 Ⓑ 14 JAN 72

P.A. NAVY – AS Other Cust. ARMY – AV US AF – 71	TITLE **VALVE, CHECK, OXYGEN, HIGH PRESSURE, FILLER CONNECTION**	**MILITARY STANDARD** **MS22035**
PROCUEMENT SPECIFICATION MIL-V-5027	SUPERSEDES MS22035(AER)	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.