FED SUP CLASS
5925

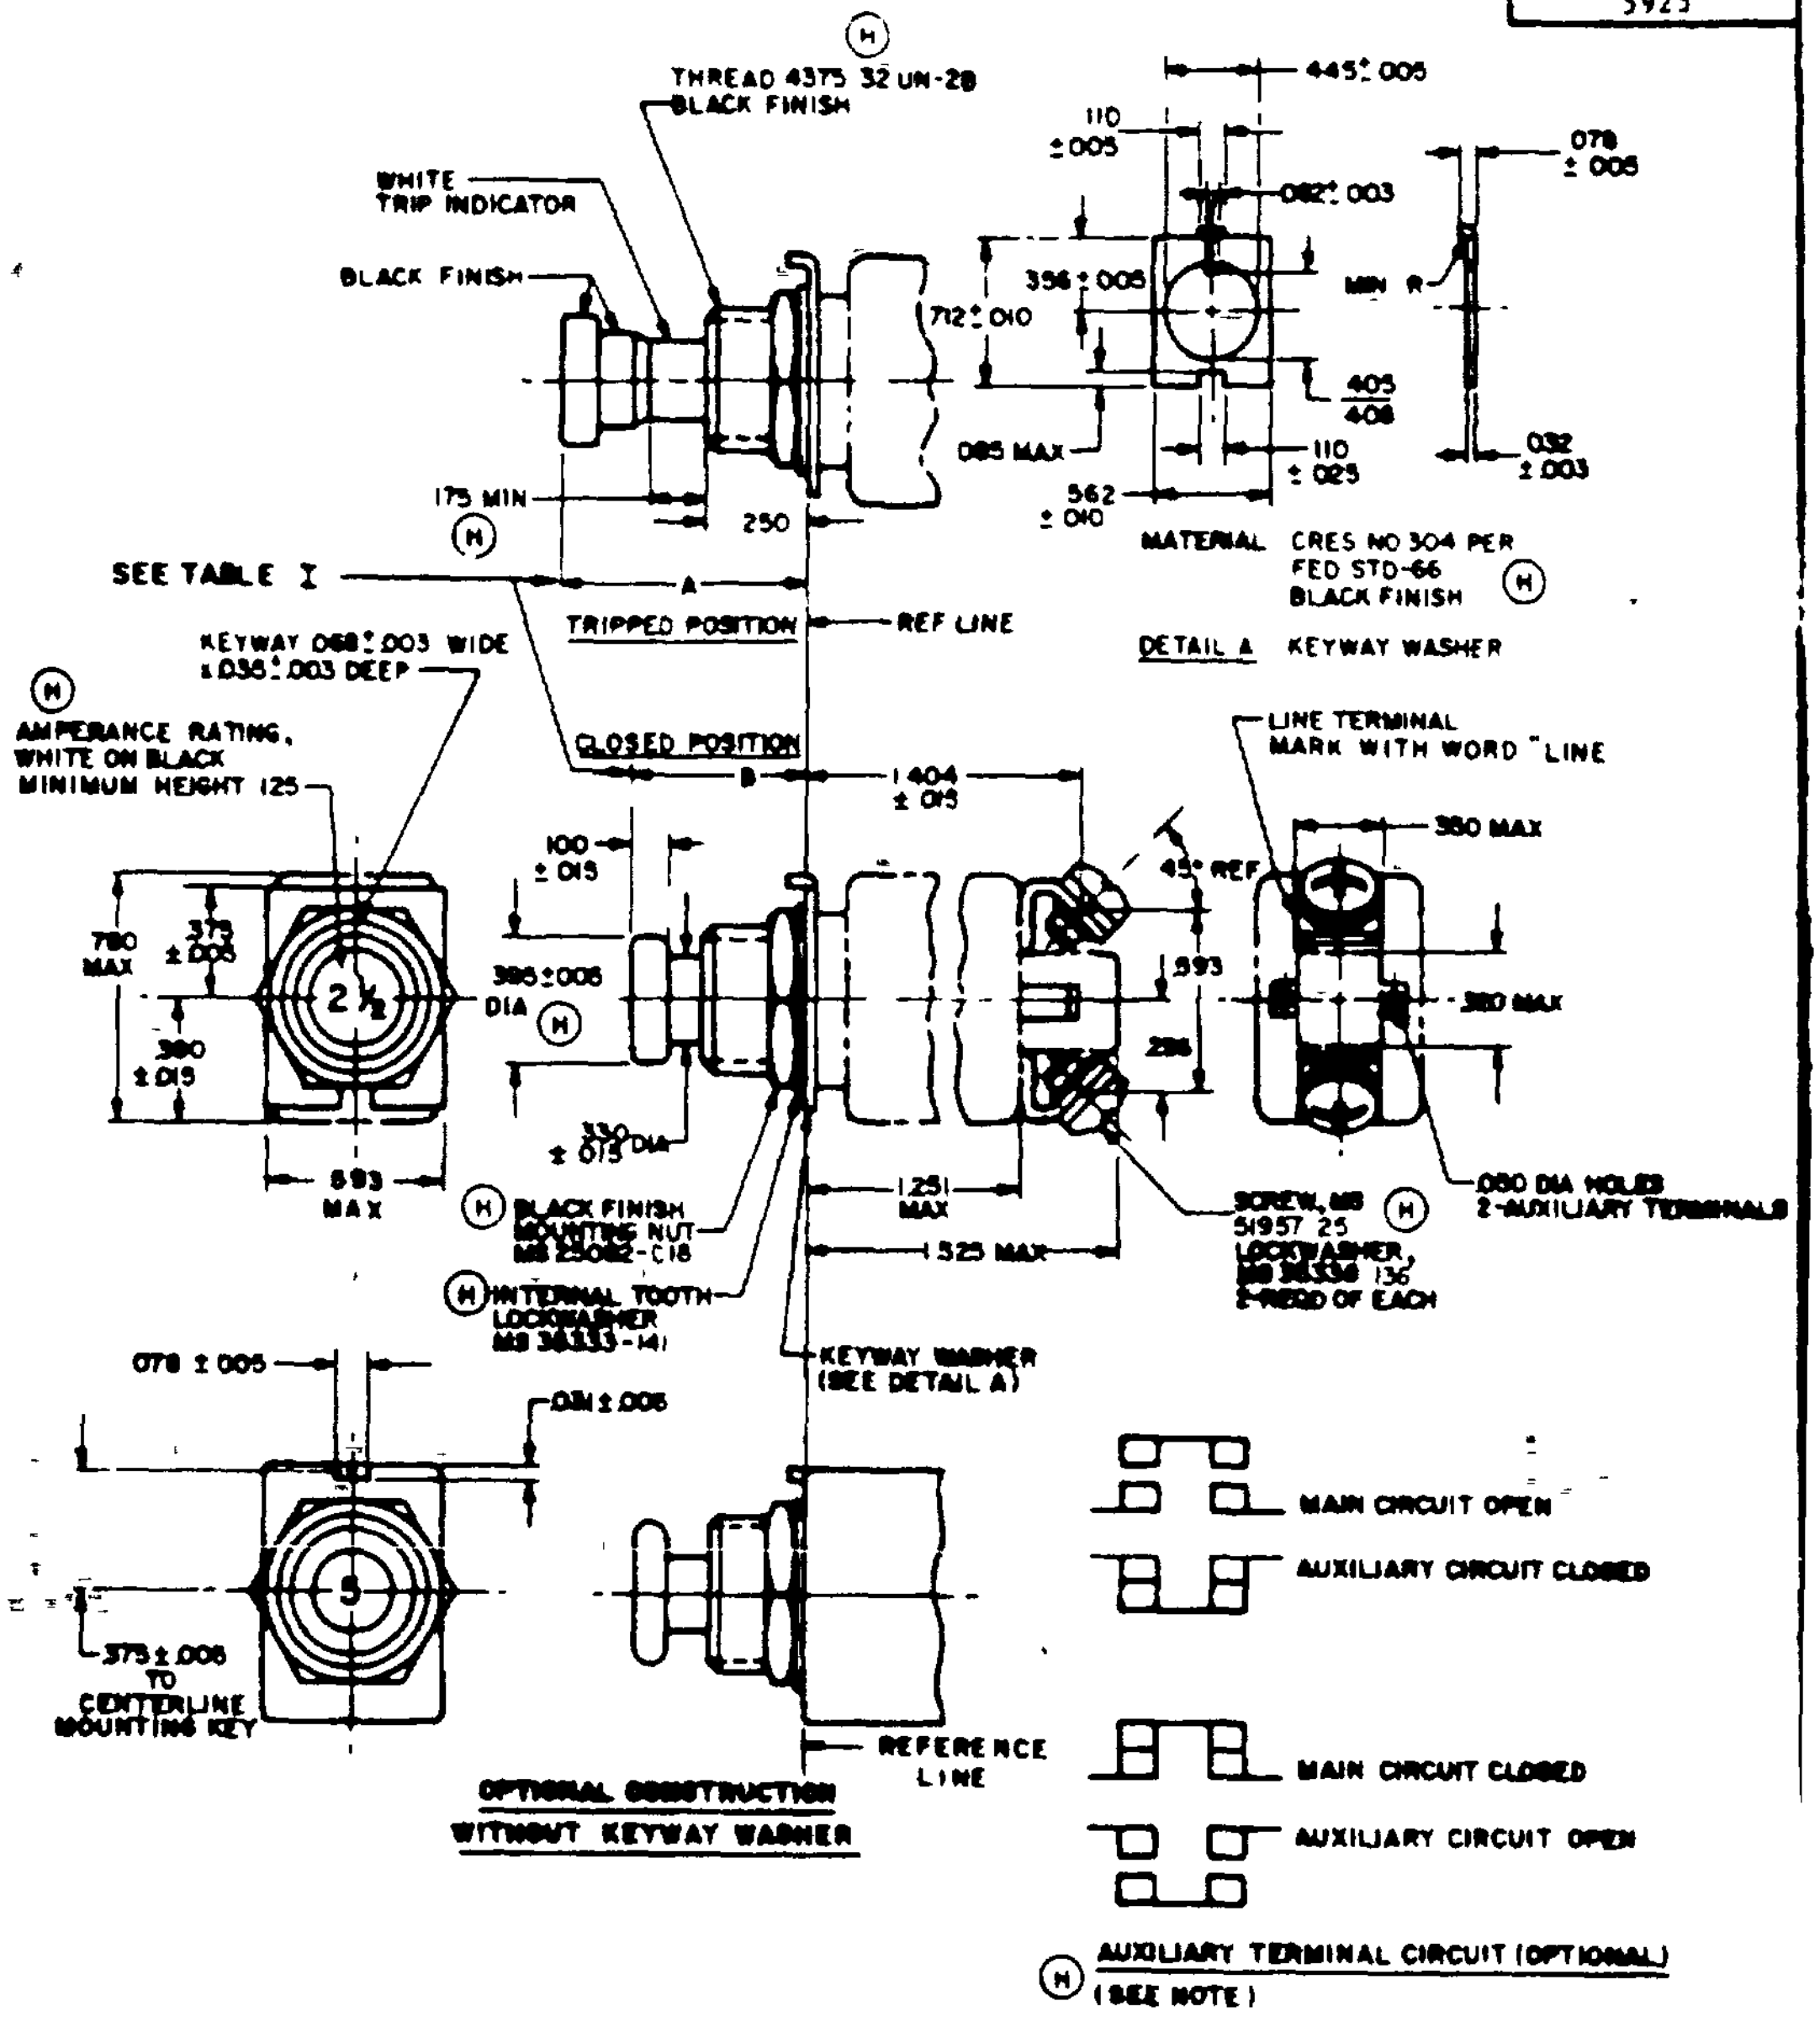
(H)
THREAD .4375-32 UN-2B
BLACK FINISH
WHITE TRIP INDICATOR
BLACK FINISH
.175 MIN
.250
.712 ± .010
.085 MAX
.562 ± .010
.110 ± .005
.445 ± .005
.082 ± .003
.356 ± .005
MIN R
.405 / .408
.110 ± .025
.078 ± .005
.032 ± .003
MATERIAL CRES NO 304 PER FED STD-66 BLACK FINISH
DETAIL A KEYWAY WASHER
SEE TABLE I
A
TRIPPED POSITION
REF LINE
CLOSED POSITION
B
KEYWAY .068 ± .003 WIDE ± .036 ± .003 DEEP
AMPERANCE RATING, WHITE ON BLACK MINIMUM HEIGHT .125
.780 MAX
.375 ± .005
.380 ± .015
2½
.593 MAX
.100 ± .015
.385 ± .005 DIA
.330 ± .015 DIA
1.404 ± .015
45° REF
.593
.286
.380 MAX
.380 MAX
LINE TERMINAL MARK WITH WORD "LINE"
.080 DIA HOLES 2-AUXILIARY TERMINALS
1.251 MAX
1.525 MAX
BLACK FINISH MOUNTING NUT MS 25082-C18
INTERNAL TOOTH LOCKWASHER MS 35333-141
SCREW, MS 51957-25 LOCKWASHER, MS 35338-136 2-REQD OF EACH
KEYWAY WASHER (SEE DETAIL A)
.078 ± .005
.031 ± .005
5
.375 ± .005 TO CENTERLINE MOUNTING KEY
REFERENCE LINE
OPTIONAL CONSTRUCTION WITHOUT KEYWAY WASHER
MAIN CIRCUIT OPEN
AUXILIARY CIRCUIT CLOSED
MAIN CIRCUIT CLOSED
AUXILIARY CIRCUIT OPEN
AUXILIARY TERMINAL CIRCUIT (OPTIONAL) (SEE NOTE)

(H)

PUSHBUTTON	A (MAX)	B (MIN)
STANDARD	759	407
EXTRA LENGTH	1 134	782

(H) DENOTES CHANGES

P.A. NAVY — AS Other Cust USAF - 85 ARMY - ER	INTERNATIONAL INTEREST •	TITLE CIRCUIT BREAKER TRIP-FREE PUSH-PULL 1/2 THRU 20 AMP TYPE	MILITARY STANDARD MS26574
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES:	SHEET 1 OF 4

DD FORM 672-1 (Continued)

PROJECT 0 5925-01

ENGINEERING SPECIFICATIONS

ARMY - AT SM MC

ARMY - AV
USAF - 11
DFSC - ES

AMSC N/A
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5925

ARMY - AT SM MC

ARMY - AV
USAF - 11
DESC - ES

TABLE (H)

ELECTRICAL AND MECHANICAL CHARACTERISTICS										
DASH NUMBER	NOMINAL CAPACITY AMPERES	VOLTAGE DROP MAX (V	WEIGHT MAX (LBS)	OPERATING FORCE MAX (LBS)		ENDURANCE CYCLES (MAIN)				
						RESISTIVE		INDUCTIVE		MECH NO LOAD
				PULLOUT	RESET	AC	DC	AC	DC	
1 2	0 5 (1/2)	2 0	066	5	5	1/ 5,000	2/ 5 000	1/ 2 500 6 TO 7 LAGGING POWER FACTOR	2/ 2 500	5 000
3/4	0 75 (3/4)	1 45								
1	1	1 1								
1-1/2	1 5 (1-1/2)	75								
2	2	75								
2-1/2	2 5 (2-1/2)	70								
3	3	55								
4	4	45								
5	5	35								
7-1/2	7 5 (7-1/2)	30								
10	10	28								
15	15	25								
20	20	25								
ENDURANCE CYCLES (AUXILIARY CIRCUIT)						1/ 5,000 WITH 3 AMP LOAD	2/ 5,000 WITH 5 AMP LOAD	1/ 5,000 WITH 2 AMP 6 TO 7 LAG P F	2/ 5,000 WITH 3 AMP LOAD	

1/ 400 CYCLE 115/200 VOLT SYSTEM TESTED AT 120 ± 5 VOLTS 380-420 HZ
2/ 28 VOLTS DC SYSTEM TESTED AT 30 ± 2 VOLTS

TABLE II (H)

DETAIL CALIBRATION REQUIREMENTS -- TRIP TIME IN SECONDS									
NOMINAL CAPACITY AMPERES	+25°C PERCENT RATED CURRENT					+55°C PERCENT RATED CURRENT		+71°C PERCENT RATED CURRENT	
	115	150	200	500	1000	135	180	90	130
0 5 (1/2)	MUST HOLD 1 HOUR MIN	MUST TRIP 1 HOUR MAX	2 TO 20	16 TO 1 2	046 TO 0 8	MUST HOLD - 1 HOUR MIN	MUST TRIP 1 HOUR MAX	MUST HOLD 1 HOUR MIN	MUST TRIP - 1 -HOUR MAX
0 75 (3/4)									
1									
1 5 (1-1/2)									
2									
2 5 (2-1/2)									
3									
4									
5									
7 5 (7-1/2)									
10									
15									
20									

AMBIENT TEMPERATURE TOLERANCE ±2°C

8 JUN 64 H FOR CHANGES SEE SHEETS 1 THRU 4

P.A. NAVY — AS Other Cust USAF - 85 ARMY - ER	INTER NATIONAL INTEREST SEE NOTE 6	TITLE CIRCUIT BREAKER TRIP FREE PUSH-PULL ? THRU ?? AMP TYPE
PROCUREMENT SPECIFICATION MIL-C-5809	SUPERSEDES	

MILITARY STANDARD

MS26574

SHEET OF 4

DD FORM 672-1 (Continued)

FED. SUP CLASS
5925

USER ACTIVITIES:
ARMY - AT, SM, WC

CUSTODIANS:
ARMY - AV
USAF - 11
DESC - ES

TABLE III Ⓗ

NOMINAL CAPACITY AMPERES	INTERRUPTING CURRENT (AMPERES) REQUIREMENTS					
	TEST DESIGNATION PER MIL-C-5809					
	A	B	C	D	E	F
0.5 (1/2)	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	(a) 2,000 (b) 1,000 (c) 750	(a) 3,000 (b) 1,500 (c) 1,000
0.75 (3/4)						
1						
1.5 (1-1/2)						
2	800	800			(a) 500 (b) 300 (c) 50	
2.5 (2-1/2)						
3						
4						
5						
7.5 (7-1/2)	500	500	2,000	2,000	(a) 300 (b) 50	(a) 1,500 (b) 1,000 (c) 500
10						
15						
20						

TABLE IV Ⓗ

ENVIRONMENTAL PERFORMANCE	
MAXIMUM OPERATING ALTITUDE - FT	80,000
OPERATING AMBIENT TEMPERATURE RANGE	-55°C to +71°C
VIBRATION - IN ACCORDANCE WITH MIL-C-5809	SINE - REQUIRED RANDOM - (OPTIONAL)
SHOCK	30G, MIL-STD-202, METHOD 213, TEST CONDITION J
ACCELERATION	10G

Ⓗ **REQUIREMENTS**

1 THE PART NUMBERS FOR CIRCUIT BREAKERS IN ACCORDANCE WITH THIS SPECIFICATION SHALL CONFORM TO THE EXAMPLE BELOW

```
MS26574 - DSAL
   |      ||||
   |      |||└──EXTRA LENGTH PUSHBUTTON (OPTIONAL)
   |      ||└───AUXILIARY TERMINALS (OPTIONAL)
   |      |└────AMPERAGE RATING
   |      └─────RANDOM VIBRATION LEVEL (OPTIONAL)
   └────────────BASIC PART NUMBER
```

WHEN A DESIGNATOR IS NOT APPLICABLE IT SHALL BE OMITTED FROM THE PART NUMBER

2 FOR CIRCUIT BREAKERS WITH AUXILIARY TERMINALS WHEN THE MAIN CIRCUIT IS OPEN THE AUXILIARY CIRCUIT IS CLOSED, AND WHEN THE MAIN CIRCUIT IS CLOSED THE AUXILIARY CIRCUIT IS OPEN

3 CIRCUIT BREAKERS ARE DESIGNED TO BE NONRECYCLING AS DEFINED IN MIL-C-5809

4 THE KEYWASHER OF DETAIL A SHALL BE PASSIVATED PER QQ-P-35

5 AUXILIARY TERMINALS ON THE CIRCUIT BREAKERS ARE INDICATED BY THE LETTER A IN THE PART NUMBER

Preparer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for an item for engineering and design applications and for repetitive use should be made from this document.

REVISED H FOR CHANGES SEE SHEETS 1 THRU 4

APPROVED 8 JUN 64

P.A. NAVY — AS Other Cust USAF - 85 ARMY - ER	INTER NATIONAL INTEREST SEE NOTE 6	TITLE CIRCUIT BREAKER, TRIP FREE, PUSH-PULL 1/2 THRU 20 AMP TYPE
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDING

MILITARY STANDARD

MS 26574

SHEET 3 OF 4

DD FORM 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

ENGINEERING SPECIFICATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5925

NOTES

1 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCE DECIMALS ± .031, ANGLES ±2°

2 PHANTOM LINES INDICATE THAT CONTOUR IS OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED

3 VOLTAGE RATING 28 VDC NOMINAL OR 115V 400 HZ NOMINAL

4 FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

5 REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

6 CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (ASCC 12/3) WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED

ARMY - AT, SM, MC

ARMY - AV
USAF - 11
DESC - ES

APPROVED 8 JUN 64

FOR CHANGES SEE SHEETS 1 THRU 4

P.A. NAVY — AS Other Cust USAF 85 ARMY ER INTERNATIONAL INTEREST SEE NOTE 6	TITLE CIRCUIT BREAKER TRIP-FREE PUSH-PULL 1 2 THRU 20 AMP TYPE	MILITARY STANDARD **MS26574**
PROCUREMENT SPECIFICATION MIL-C 5809	SUPERSEDES:	SHEET 4 OF 4

DD FORM 672-1 (Continued)