INCH-POUND

MS27710E
7 July 2021
SUPERSEDING
MS27710D
5 September 2003


MILITARY SPECIFICATION SHEET

FLASHER, SOLID STATE, AIRCRAFT NAVIGATIONAL LIGHT, 28 V DC

Inactive for new design and is no longer used except for replacement purposes.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the flasher described herein shall consist of this specification and the latest issue of MIL-F-26301.

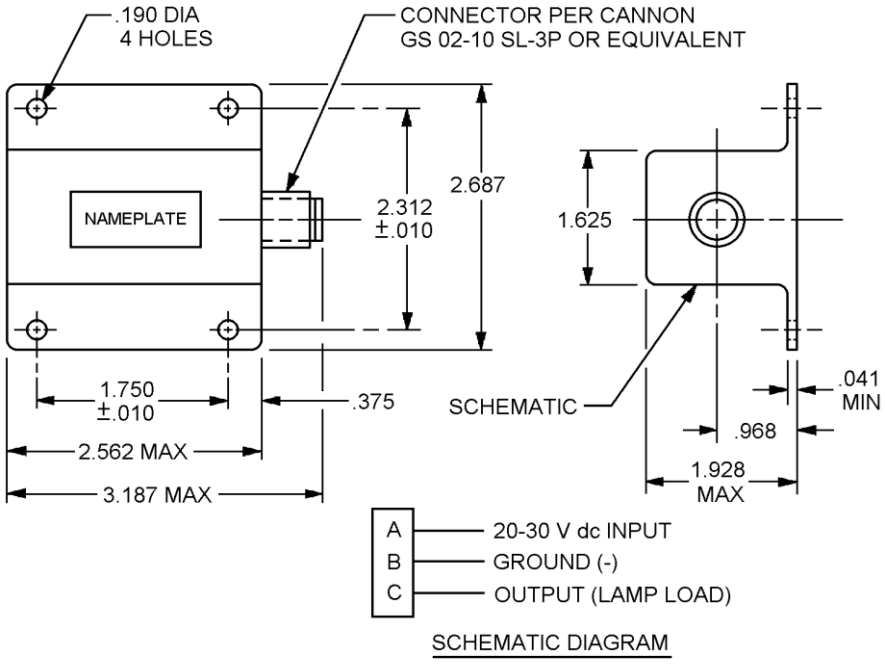

SCHEMATIC DIAGRAM

Inches	mm
.010	0.25
.041	1.04
.190	4.83
.968	24.59
1.625	41.28
1.750	44.45
1.928	48.97
2.312	58.72
2.562	65.07
2.687	68.25
3.187	80.95

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.032 (0.81 mm).
4. The flasher need not have the contour shown, but shall be contained within the outline shown.
5. Case-enclosure may be completely potted or hermetically sealed. If the enclosure is hermetically sealed, it shall be tested in accordance with MIL-STD-202-112, test condition C, procedure IV. Maximum total leakage rate shall not exceed 1 micron cubic foot per hour per cubic inch sealed volume at a pressure differential of 1 atmosphere.
6. Life paragraph 4.5.14 of MIL-F-26301 applies. The test shall consist of 2500 hours of operation, during and at end of which the unit shall meet the flash rate specified herein.
7. Flasher shall conform to MIL-F-26301, type II, style I, class I, and as specified herein.
8. For design purposes, this specification sheet takes precedence over MIL-F-26301.
9. Referenced documents shall be of the issue in effect on date of invitation for bid.
10. First article testing shall be performed in accordance with MIL-F-26301.

FIGURE 1. Dimensions and configuration - Continued.

REQUIREMENTS:

Input voltage: 20-30 V dc.

Output (contact rating): 2.5 amperes (lamp load at 28 V dc).

Flash rate: 85 ±10 flashes per minute (FPM).

Life: 2500 hours.

Weight: 10 ounces maximum.

Part number: MS27710-01.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-F-26301, this document references the following:
MIL-STD-202-112

Custodians:
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2021-018)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.