This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
Navy - AS
USAF - 11
Army - EL

User activities:

Ⓔ INACTIVE FOR NEW DESIGN AFTER 5 SEP 1975

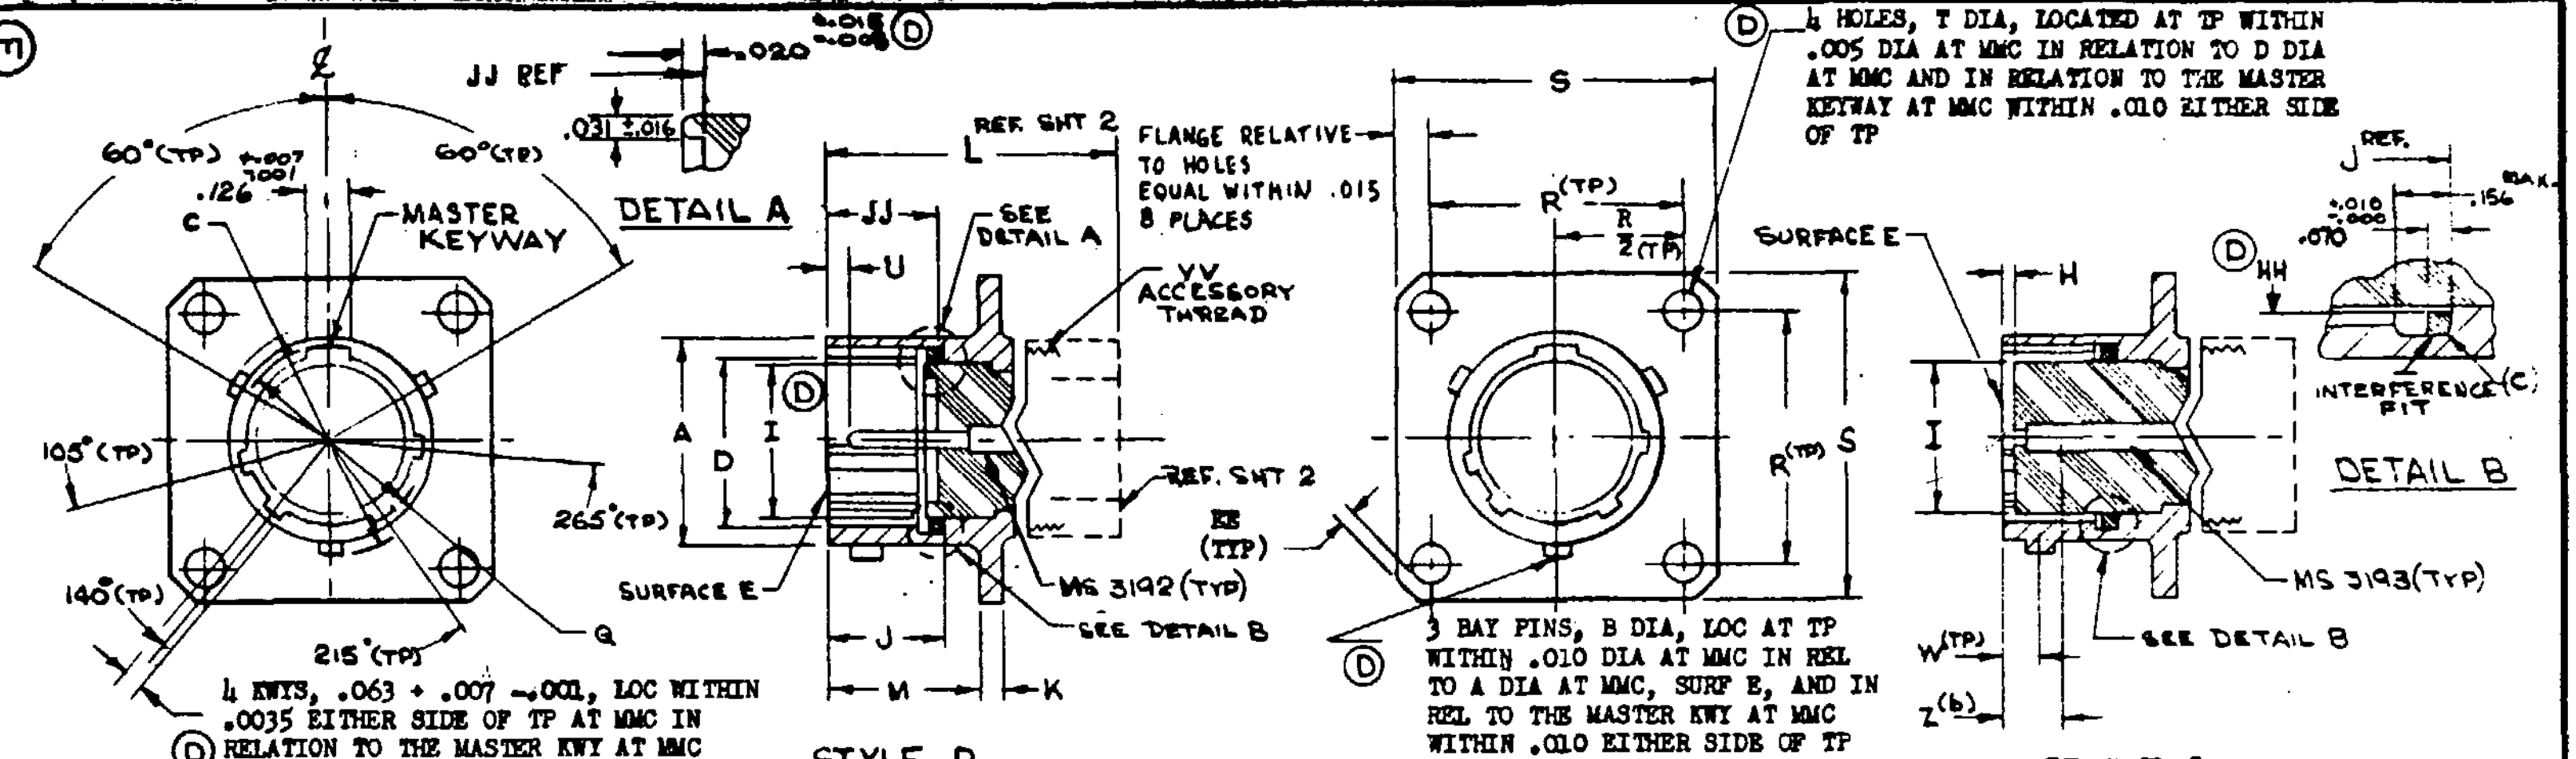

℄
60°(TP)
60°(TP)
.126 +.007 -.001
C
MASTER KEYWAY
105°(TP)
140°(TP)
215°(TP)
265°(TP)
SURFACE E
Q
JJ REF
.020 +.015 -.005 Ⓓ
.031 ±.016
DETAIL A
REF SHT 2
L
JJ
U
SEE DETAIL A
A
D
I
Ⓓ
VV ACCESSORY THREAD
REF. SHT 2
EE (TYP)
MS 3192 (TYP)
SEE DETAIL B
J
M
K
FLANGE RELATIVE TO HOLES EQUAL WITHIN .015 8 PLACES
S
R (TP)
R/2 (TP)
SURFACE E
H
I
W (TP)
Z (b)
MS 3193 (TYP)
SEE DETAIL B
J REF.
.156 MAX.
+.010 -.000
.070
Ⓓ HH
INTERFERENCE FIT (C)
DETAIL B

4 KWYS, .063 + .007 -.001, LOC WITHIN .0035 EITHER SIDE OF TP AT MMC IN Ⓓ RELATION TO THE MASTER KWY AT MMC AND D DIA AT MMC

Ⓓ 3 BAY PINS, B DIA, LOC AT TP WITHIN .010 DIA AT MMC IN REL TO A DIA AT MMC, SURF E, AND IN REL TO THE MASTER KWY AT MMC WITHIN .010 EITHER SIDE OF TP

Ⓓ 4 HOLES, T DIA, LOCATED AT TP WITHIN .005 DIA AT MMC IN RELATION TO D DIA AT MMC AND IN RELATION TO THE MASTER KEYWAY AT MMC WITHIN .010 EITHER SIDE OF TP

STYLE P (PIN INSERT)

CLASS E, F, P, RECEPTACLES

STYLE S (SOCKET INSERT)

SIZE	A DIA +.001 -.005 OD	B +.006 -.002 BAY PIN DIA	C DIA +.000 -.016 OVER BAY PINS	D DIA +.005 -.001 ID	H +.000 -.020 SOCKET INSERT LOC	I MAX INSERT DIA	J ±.010 PACKING LOC	JJ +.000 -.020 PIN INSERT LOC	K ±.016 THK MTG FLANGE	M +.031 -.000 MTG FLANGE LOC	Q DIA +.005 -.006 OVER KWYS	R (TP) MTG HOLES	S MAX LENGTH SIDE	T +.005 DIA MTG HOLES	U +.010 -.020 PIN CONTACT LOC	W (TP) BAY PIN LOC	Z (b) +.000 -.078 SOCKET CONTACT SPRING LOC	VV CLASS 2A ACCESSORY THREAD		EE MIN EDGE DIST	INSERT ARR (REF)
8	.473	.078	.563	.362	.025	.285	.382	.332	.062	.431	.412	.594	.828	.120	.085	.100	.153	7/16-28		.035	MS33708
10	.590		.680	.490		.402					.540	.719	.954					9/16-24			MS33709
12	.750		.859	.607		.516					.689	.812	1.047					11/16-24			MS33710
14	.875		.984	.732		.641					.814	.906	1.141					13/16-20			MS33711
16	1.000		1.108	.857		.766					.939	.969	1.234					15/16-20			MS33712
18	1.125		1.233	.962		.855					1.039	1.062	1.326					1-1/16-18			MS33713
20	1.250		1.358	1.087	.087	.980	.444	.394	.094	.556	1.164	1.156	1.453		.147		.215	1-3/16-18		.050	MS33714
22	1.375		1.483	1.212		1.105					1.289	1.250	1.578					1-5/16-18			MS33715
24	1.500	.125	1.610	1.337		1.229				.589	1.414	1.375	1.703	.147		.109		1-7/16-18			MS33716

(a) DIMENSIONS IN INCHES
(b) DISTANCE BETWEEN END OF SHELL AND THE POINT AT WHICH A GAGE PIN HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE FIRST ENGAGES SOCKET CONTACT SPRING Ⓓ
(c) PACKING MATERIAL SHALL MEET THE REQUIREMENTS OF MIL-STD-417.
(d) TRUE POSITION (TP) TOLERANCES SPECIFIED ARE IN ACCORDANCE WITH MIL-STD-8
(e) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED Ⓓ
(f) EXAMPLE OF PART NUMBER: MS3120 E 12-3 P W

MS NUMBER — CLASS — SIZE — INSERT ARRANGEMENT — CONTACT STYLE — ALTERNATE INSERT POSITION

SIZE	HH MAX ID GASKET Ⓓ	P MAX Ⓓ
8	.329	.087
10	.457	
12	.564	
14	.689	
16	.814	
18	.907	
20	1.039	.212
22	1.164	
24	1.289	



P
PANEL
B
P
PANEL

FRONT PANEL MTG (REF.)

REAR PANEL MTG. (REF.)

FED. SUP CLASS
5935

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓔ FOR CHANGES SEE SHEETS 1 AND 2.

APPROVED 5 OCT. 61 REVISED Ⓐ 18 JULY 1962 Ⓑ 24 AUG 62 Ⓒ 14 FEB 64 Ⓓ 15 SEP 67 Ⓔ 5 SEP 75

P.A. Navy - AS
Other Cust
USAF - 11
Army - EL Ⓓ

PROCUREMENT SPECIFICATION
MIL-C-26482

TITLE
CONNECTORS, RECEPTACLE, ELECTRIC CRIMP-TYPE, WALL MOUNTING, FLANGE, Nº 4 HOLES, BAYONET COUPLING

SUPERSEDES:

MILITARY STANDARD
MS3120

SHEET 1 OF 2

5935-1947-09

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
Navy - AS
USAF - 11
Army - EL

User activities:

CLASS E

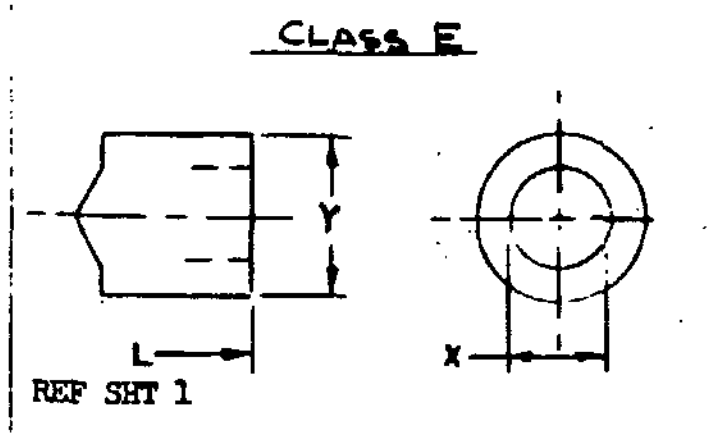

Ⓓ CLASS F

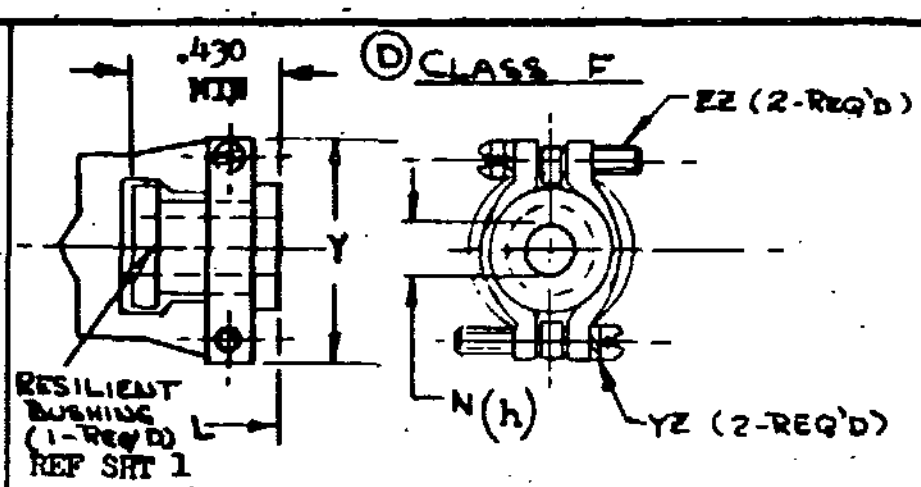

CLASS P

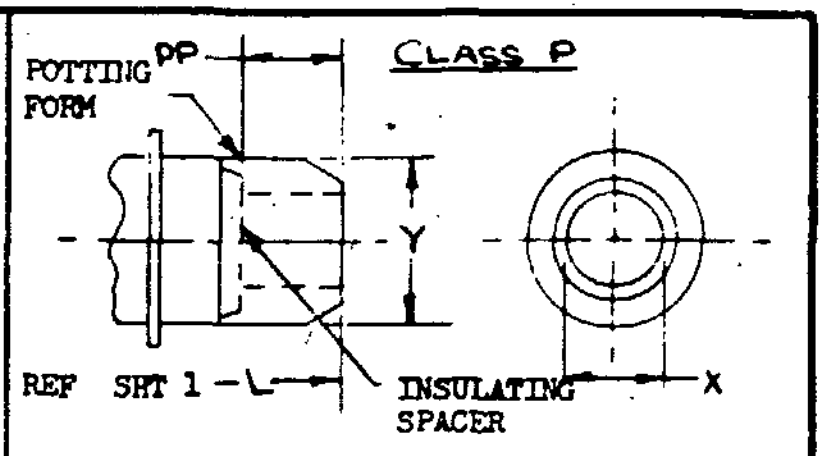

SIZE	CLASS E L MAX OVER-ALL LENGTH	CLASS E X DIA MIN ID	CLASS E Y DIA MAX OD	CLASS F L MAX OVER-ALL LENGTH	CLASS F X DIA MIN OPEN	CLASS F Y MAX	CLASS F V MAX CLOSED	CLASS P L Ⓓ MAX OVER-ALL LENGTH	CLASS P X Ⓓ DIA MIN ID	CLASS P Y Ⓓ DIA MAX OD	CLASS P PP Ⓓ MIN
8	1.552	.259	.608	2.422	.234	.828	.187	1.675	.317	.608	.250
10		.359	.734		.297	.891	.187		.434	.734	
12		.469	.858		.422	1.016	.281		.548	.858	
14		.589	.984		.547	1.141	.325		.673	.984	
16		.717	1.110	2.537	.609	1.203	.356		.798	1.110	
18		.779	1.234		.734	1:469	.456		.899	1.234	
20	1.709	.901	1.360	2.824			.519	1.963	1.024	1.360	
22		1.009	1.484		.922	1.656		1.963	1.149	1.484	
24		1.123	1.610	2.900	.984	1.750	.657	2.025	1.274	1.610	

SIZE		N (g) Ⓓ FREE DIA	ZZ SCREW THREADS	YZ (h) Ⓓ LOCKWASHERS AN935 OR AN936
8		.125	6-32UNC	AN935B6L OR -6L AN936-A6B OR -A6
10		.188		
12		.312		
14		.375		
16		.500		
18		.625	8-32UNC	AN935B8L OR -8L AN936-A8B OR -A8
20		.625		
22		.750		
24		.800		

Ⓓ DIMENSIONS WITH BUSHING REMOVED



(g) USE MS3420 BUSHING IF [illegible] OPENING IS REQUIRED
(h) LOCKWASHERS MAY BE CAPTIVE

FED. SUP CLASS
5935

APPROVED 5 oct 61 REVISED Ⓔ FOR CHANGES SEE SHEETS 1 AND 2.

P.A Navy - AS
Other Cust
USAF - 11
Army - EL Ⓓ

PROCUREMENT SPECIFICATION
MIL-C-26482

TITLE
CONNECTORS, RECEPTACLE, ELECTRIC,
CRIMP TYPE, WALL MOUNTING, FLANGE,
№ 4 HOLES, BAYONET COUPLING

SUPERSEDES:

MILITARY STANDARD
MS 3120

SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-1947-09

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.