
FED. SUP CLASS
6140

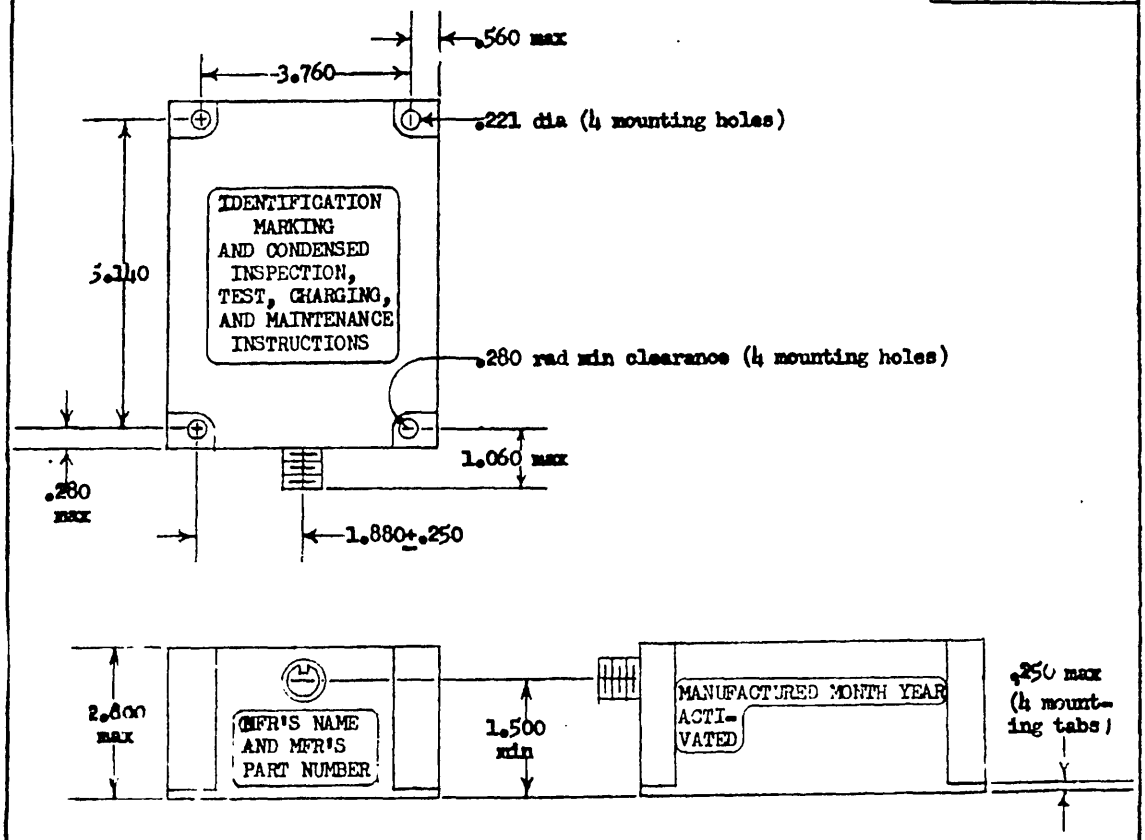

NOTES.

1. DIMENSIONS. The dimensions of each battery shall be as shown above. All dimensions are in inches. All tolerances are ±.010 unless otherwise specified. All recurrent dimensions are typical.

2. MS PART NUMBER. The MS part number of the battery shall be MS3319-1.

3. ELECTRIC CONNECTIONS. Each battery shall include as its electric connections a receptacle which shall be usable with an MS3106-12S-3P plug and which shall be installed on the battery in the location and orientation shown above. Socket A shall be negative, and socket B shall be positive.

4. NOMINAL CAPACITY. The nominal capacity of the battery shall be 3/4 ampere-hour.

5. MARKING. If the identification marking and instructions are on a removable cover, the manufacturer's name and manufacturer's part number shall also be marked in the location and orientation shown above.

6. WEIGHT. The weight of the battery filled with electrolyte shall not exceed 3.5 pounds in any state of charge.

APPROVED 29 Sep 67 REVISED (C) 30 Aug 72 (D) 24 Sept 82

This standard has been approved by the Naval Air Systems Command, Department of the Navy, and is mandatory for use by the activity. All other military activities are required to employ this standard where suitable.

P.A.	TITLE	MILITARY STANDARD
Navy - AS Other Cust	BATTERY, STORAGE, AIRCRAFT, HEAVY DUTY, 3/4 AMPERE-HOUR, 24-VOLT	MS 3319(AS)
Procurement Specification MIL-B-8565	SUPERSEDES:	SHEET 1 OF 2

Project No. 6140-N580

DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:01Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6140

7. SPECIFICATION. The batteries shall conform to requirements of MIL-B-8565 for maintainable, plate-mounted, heavy duty high discharge rate batteries modified as follows:

GENERAL.

A. Replace "design standard", wherever it occurs, with "procurement standard."
B. Requirements for receptacle-connected batteries are not applicable to this battery.

(D) 4.6.7.1 FOR THE LIFE TEST. Replace text with: "For each charge of the life test, a potential of 28.0 ± 0.5 VDC shall be applied across the terminals of the battery. The charging source shall have a current capacity of not less than 7.5 amperes.

(D) TABLE 5 - TEST VALUES. Change "-22°F" in two places, to "-10F."

(D) 4.7.16 ONE-HOUR DISCHARGE AT -22°F. Change "-22F" in the title and the text, to "-10F."

4.7.24 VIBRATION. Add to first sentence: "except that Curve A shall be changed so that the peak acceleration at frequencies between 5 and 16 Hz shall be ±0.5g."

4.7.25 SPECIAL TESTS. Add:

4.7.25.1 1.3-HOUR DISCHARGE. The battery shall be subjected to a 1.3-hour discharge with a current of 0.62 ampere and a minimum potential of 18 volts.

4.7.25.2 FIVE-MINUTE DISCHARGE AT -10F. The battery shall be subjected to a 5-minute discharge at -10F with a current of 3.5 amperes and a minimum potential of 17 volts.

4.7.25.3 TEN-SECOND DISCHARGE AT -10F. The battery shall be subjected to a 10-second discharge at -10F with a current of 2.6 amperes and a minimum potential of 18 volts.

4.7.25.4 1.3-MINUTE DISCHARGES. The battery shall be subjected to eleven 1.3-minute discharges, with a current of 1.7 amperes and a minimum potential of 20 volts, and a 5-minute rest period between each two consecutive discharges.

4.7.25.5 STEP DISCHARGE. The battery shall be subjected to a 5.02-hour discharge at -10F. The current shall be maintained at the value listed below for each period listed below during the discharge. The potential during each period of the discharge shall not be less than the value listed below.

PERIOD OF TIME	First 1 minute	Next 3 seconds	Next 5 hours
CURRENT, AMPERES	1.7	6.5	0.15
MINIMUM POTENTIAL, VOLTS	18	17	17

APPROVED 29 Sep 67 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2

This standard has been approved by the Naval Air Systems Command, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	TITLE BATTERY, STORAGE, AIRCRAFT, HEAVY DUTY, 3/4 AMPERE-HOUR, 24-VOLT	MILITARY STANDARD MS 3319(AS)
Procurement Specification MIL-B-8565	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:01Z
Check the source to verify that this is the current version before use.