DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities:
Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities:
Army - AV
Navy - MC
Air Force -

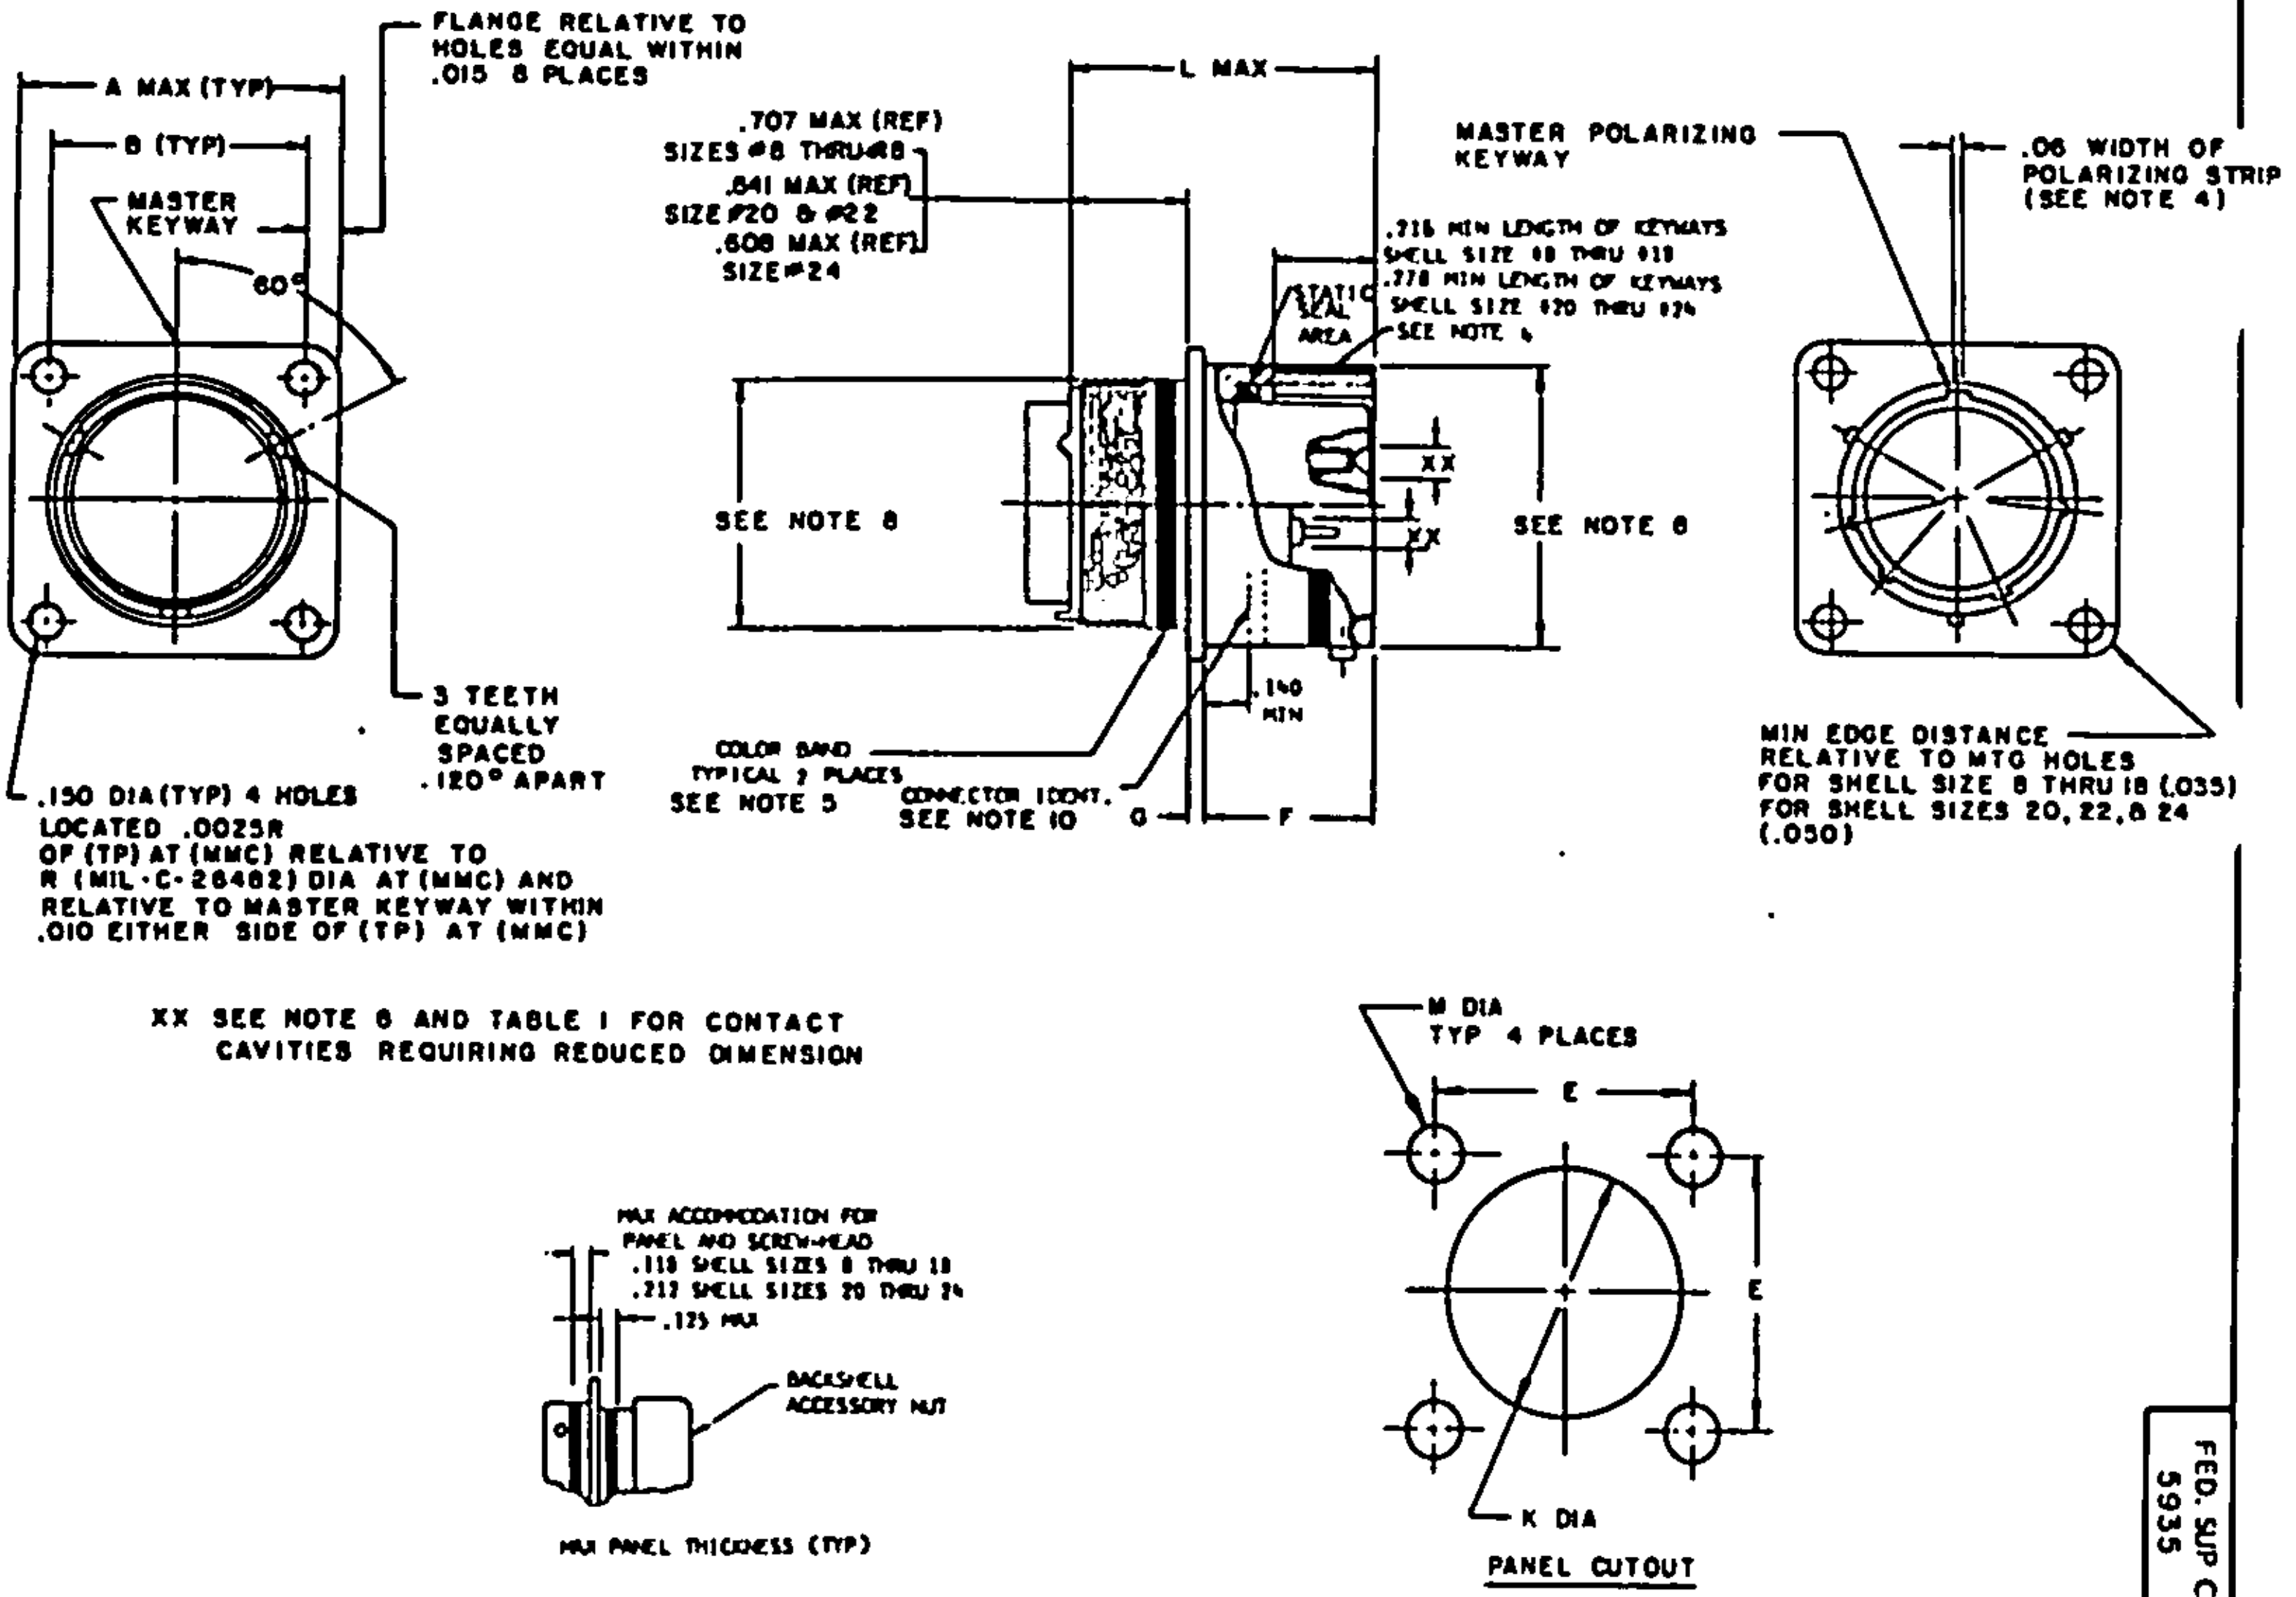
A MAX (TYP)
B (TYP)
MASTER KEYWAY
60°
FLANGE RELATIVE TO HOLES EQUAL WITHIN .015 8 PLACES
3 TEETH EQUALLY SPACED 120° APART
.150 DIA (TYP) 4 HOLES LOCATED .0025R OF (TP) AT (MMC) RELATIVE TO R (MIL-C-26482) DIA AT (MMC) AND RELATIVE TO MASTER KEYWAY WITHIN .010 EITHER SIDE OF (TP) AT (MMC)
L MAX
.707 MAX (REF) SIZES #8 THRU #18
.641 MAX (REF) SIZE #20 & #22
.608 MAX (REF) SIZE #24
SEE NOTE 8
STATIC SEAL AREA
.216 MIN LENGTH OF KEYWAYS SHELL SIZE #8 THRU #18
.278 MIN LENGTH OF KEYWAYS SHELL SIZE #20 THRU #24
SEE NOTE 4
XX
XX
SEE NOTE 8
.140 MIN
COLOR BAND TYPICAL 2 PLACES SEE NOTE 5
CONNECTOR IDENT. SEE NOTE 10
G
F
MASTER POLARIZING KEYWAY
.06 WIDTH OF POLARIZING STRIP (SEE NOTE 4)
MIN EDGE DISTANCE RELATIVE TO MTG HOLES FOR SHELL SIZE 8 THRU 18 (.035) FOR SHELL SIZES 20, 22, & 24 (.050)
XX SEE NOTE 6 AND TABLE I FOR CONTACT CAVITIES REQUIRING REDUCED DIMENSION
MAX ACCOMMODATION FOR PANEL AND SCREW-HEAD
.118 SHELL SIZES 8 THRU 18
.212 SHELL SIZES 20 THRU 24
.125 MAX
BACKSHELL ACCESSORY NUT
MAX PANEL THICKNESS (TYP)
M DIA TYP 4 PLACES
E
E
K DIA
PANEL CUTOUT

Ⓓ "ENTIRE STANDARD REVISED"

FED. SUP CLASS
5935

APPROVED 1 APR 71 REVISED Ⓓ 12 Jul 85

P.A ARMY-CR Other Cust NAVY-AS AF-85	International Interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, CRIMP TYPE, WIDE FLANGE MOUNTING, BAYONET COUPLING, CLASSES A, L, S, AND W	MILITARY STANDARD MS 3472
Procurement Specification MIL-C-26482		SUPERSEDES: MS3472 (NAVY) MIL-C-83723/38 MIL-C-83723/48	PAGE 1 OF 5

DD FORM 1 MAY 73 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3465-3

FED. SUP CLASS
5935

INCHES	MM
.0025	0.064
.015	0.38
.035	0.89
.050	1.27
.06	1.5
.118	3.00
.125	3.18
.150	3.81
.212	5.38
.216	5.49
.278	7.06
.608	15.44
.641	16.28
.707	17.96



ASSEMBLED TO STRAIGHT
BACKSHELL LESS STRAIN RELIEF
(SEE NOTE 7)



ASSEMBLED TO STRAIGHT
BACKSHELL WITH STRAIN RELIEF
(SEE NOTE 7)



ASSEMBLED TO 90° BACKSHELL
WITH STRAIN RELIEF
(SEE NOTE 7)

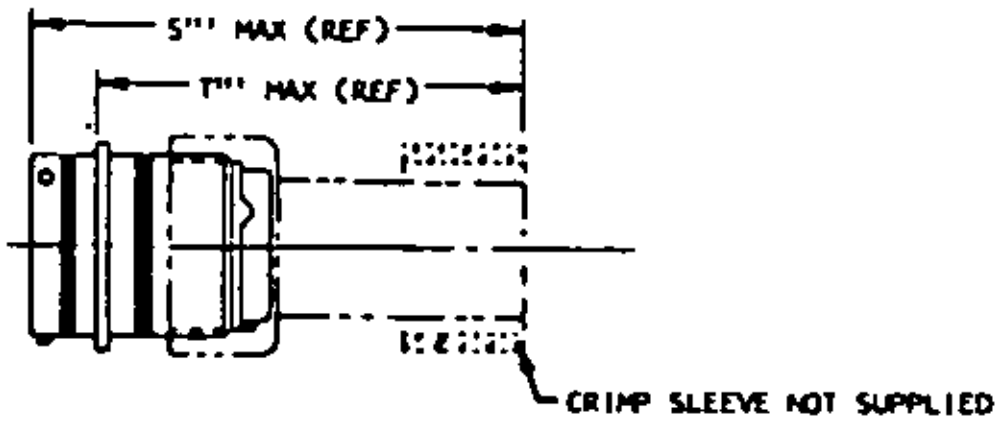

ASSEMBLED TO RFI BACKSHELL
(SEE NOTE 7)

P.A ARMY-CR Other Cust NAVY-AS AF-85	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, CRIMP TYPE, WIDE FLANGE MOUNTING, BAYONET COUPLING, CLASSES A, L, S, AND W	MILITARY STANDARD MS 3472
Procurement Specification MIL-C-26482		SUPERSEDES: MS3472 (NAVY) MIL-C-83723/3B MIL-C-83723/4B	PAGE 2 OF 5

DD FORM 1 MAY 73 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army - AV
Navy - MC
Air Force -

APPROVED 1 APR 71 REVISED (D) FOR CHANGES SEE PAGES 1,2,3,4, AND 5 12 Jul 85

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army - AV
Navy - MC
Air Force -

FED. SUP CLASS
5935

Size	A	B	E	F	G	K	L	M	S	S'
8	1.065 (27.05)	.734 (18.64)	.734 (18.64)	.493/.462 (12.52/11.73)	.078/.046 (1.98/1.17)	.563/.573 (14.30/14.55)	1.215 (30.86)	.140/.160 (3.56/4.06)	1.492 (37.90)	1.842 (46.79)
10	1.141 (28.98)	.812 (20.62)	.812 (20.62)	↑	↑	.689/.690 (17.27/17.53)	↑	↑	↑	1.842 (46.79)
12	1.266 (32.16)	.938 (23.83)	.938 (23.83)			.859/.869 (21.82/22.07)				1.842 (46.79)
14	1.360 (34.54)	1.031 (26.19)	1.031 (26.19)			.984/.994 (24.99/25.25)				2.077 (52.76)
16	1.453 (36.91)	1.125 (28.58)	1.125 (28.58)	↓	↓	1.108/1.118 (28.14/28.40)	↓			2.077 (52.76)
18	1.532 (38.91)	1.203 (30.56)	1.203 (30.56)	.493/.462 (12.52/11.73)	.078/.046 (1.98/1.17)	1.233/1.243 (31.32/31.57)	1.215 (30.86)		1.492 (37.90)	2.077 (52.76)
20	1.688 (42.88)	1.297 (32.94)	1.297 (32.94)	.587/.556 (14.91/14.12)	.110/.078 (2.79/1.98)	1.358/1.368 (34.49/34.75)	1.275 (32.39)		1.552 (39.42)	2.137 (54.28)
22	1.766 (44.86)	1.375 (34.93)	1.375 (34.93)	.587/.556 (14.91/14.12)	.110/.078 (2.79/1.98)	1.483/1.493 (37.67/37.92)	1.275 (32.39)	↓	1.552 (39.42)	2.137 (54.28)
24	1.891 (48.03)	1.500 (38.10)	1.500 (38.10)	.620/.589 (15.75/14.96)	.110/.078 (2.79/1.98)	1.610/1.620 (40.89/41.15)	1.275 (32.39)	.140/.160 (3.56/4.06)	1.552 (39.42)	2.137 (54.28)

APPROVED 1 APR 71 REVISED Ⓓ FOR CHANGES SEE PAGES 1, 2, 3, 4, AND 5 12 Jul 85

P.A ARMY-CR

Other Cust
NAVY-AS
AF-85

International interest

TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, CRIMP TYPE, WIDE FLANGE MOUNTING, BAYONET COUPLING, CLASSES A, L, S, AND W

MILITARY STANDARD

MS 3472

Procurement Specification
MIL-C-26482

SUPERSEDES: MS3472 (NAVY)
MIL-C-83723/3B MIL-C-83723/4B

PAGE 3 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army - AV
Navy - MC
Air Force -

FED. SUP CLASS
5935

Size	S"	S"'	T	T'	T"	T"'	U	Max weight (lbs)* Pin	Max weight (lbs)* Socket
8	2.115 (53.72)	2.339 (59.41)	1.030 (26.16)	1.380 (35.05)	1.653 (41.99)	1.920 (48.77)	.830 (21.08)	.0190 (.483)	.0200 (.508)
10	2.115 (53.72)	↕	↕	1.380 (35.05)	1.653 (41.99)	↕	.880 (22.35)	.0244 (.620)	.0258 (.655)
12	2.250 (57.15)			1.380 (35.05)	1.788 (45.42)		.950 (24.13)	.0375 (.953)	.0406 (1.031)
14	2.340 (59.44)			1.615 (41.02)	1.878 (47.70)		1.010 (25.65)	.0449 (1.140)	.0502 (1.275)
16	2.475 (62.87)			1.615 (41.02)	2.013 (51.13)		1.070 (27.18)	.0547 (1.389)	.0667 (1.694)
18	2.574 (65.38)	2.339 (59.41)	1.030 (26.16)	1.615 (41.02)	2.112 (53.64)	1.920 (48.77)	1.130 (28.70)	.0685 (1.740)	.0790 (2.006)
20	2.767 (70.28)	2.399 (60.93)	.996 (25.30)	1.581 (40.16)	2.211 (56.16)	1.855 (47.12)	1.190 (30.23)	.0851 (2.162)	.0979 (2.487)
22	2.890 (73.41)	2.399 (60.93)	.995 (25.30)	1.581 (40.16)	2.334 (59.28)	1.855 (47.12)	1.260 (32.00)	.0968 (2.459)	.1128 (2.865)
24	3.012 (76.50)	2.399 (60.93)	.996 (25.30)	1.548 (39.32)	2.423 (61.54)	1.822 (46.28)	1.320 (33.53)	.1142 (2.900)	.1341 (3.406)

* Less contacts and accessories. Maximum weights do not apply to class S.

APPROVED 1 APR 71 REVISED (D) FOR CHANGES SEE PAGES 1,2,3,4, AND 5 12 Jul 85

P.A ARMY-CR Other Cust NAVY-AS AF-85	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, CRIMP TYPE, WIDE FLANGE MOUNTING, BAYONET COUPLING, CLASSES A, L, S, AND W	MILITARY STANDARD MS3472
Procurement Specification MIL-C-26482		SUPERSEDES: MS3472 (NAVY) MIL-C-83723/3B MIL-C-83723/4B	PAGE 4 OF 5

DD FORM 1 MAY 73 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
5935

TABLE I. Reduced diameters (XX).

Shell size	Insert arrangements	Contact cavities
8	-33 & -98	A, B, C
12	-10	C, G
14	-12	A, B, C, D, E, F, G, H
14	-18	A, C, E, G, J, L
14	-19	B, D, F, H, K, M
16	-26	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R
18	-32	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T
22	-41	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y

Connector part numbering

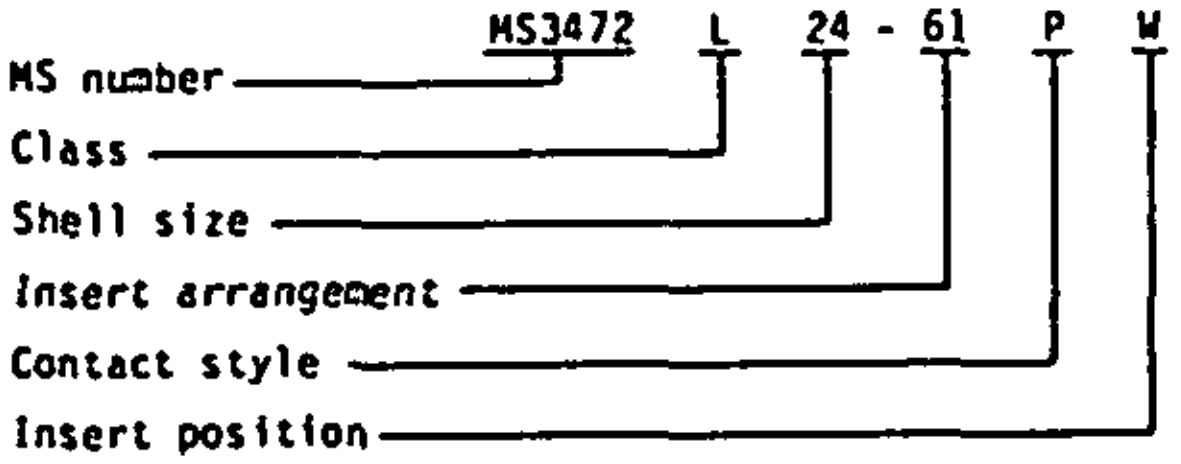

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 (0.3 mm) for two place decimals, and angular tolerances are ±0° ±1° and 0° 0' ±30'.
3. True position (TP) tolerances specified are in accordance with ANSI Y14.5-1973.
4. Polarizing stripe, color optional.
5. Color band: .070 ±.031 wide, color blue. Band location must be such that it is visible when mounted.
6. Insert arrangements requiring reduced diameters for raised seal barriers or lead-in chamfer on outer row of contact cavities as indicated. (See table I).
7. Connector assembly must be used with a backshell. Backshell must be procured separately. See MIL-C-85049 for applicable backshells.
8. Intermateability and rear accessory interchangeability dimensions shall be in accordance with MIL-C-26482.
9. For insert arrangements see MIL-STD-1669.
10. Connector identification marking shall be in accordance with MIL-C-26482. Example: MS3472 L----, M83723-04 R----, (minimum height does not apply to shell sizes 8, 10 and 12).
11. Class E cancelled and replaced by class L.
12. The complete requirements for procuring this connector described herein shall consist of this document and the issue in effect of MIL-C-26482.
13. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
14. Referenced documents shall be of the issue in effect on date of invitations for bids.
15. Metric equivalents are given for general information only.
16. Metric equivalents are in parentheses.

User activities: Army - AV
Navy - MC
Air Force -

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 1 APR 71 REVISED (D) FOR CHANGES SEE PAGES 1,2,3,4 AND 5 12 Jul 85

P.A ARMY-CR

Other Cust
NAVY-AS
AF-85

International interest

TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, CRIMP TYPE, WIDE FLANGE MOUNTING, BAYONET COUPLING, CLASSES A, L, S, AND W

MILITARY STANDARD

MS 3472

Procurement Specification
MIL-C-26482

SUPERSEDES: MS3472 (NAVY)
MIL-C-83723/38 MIL-C-83723/48

PAGE 5 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.