INCH-POUND
MS35265E
3 May 2023
SUPERSEDING
MS35265D
4 February 2022

DETAIL SPECIFICATION SHEET

SCREW, MACHINE DRILLED FILLISTER HEAD, SLOTTED, CARBON STEEL, UNC-2A

Reactivated after 4 February 2022 and may be used for new and existing designs and acquisitions.

The requirements for acquiring the described herein shall consist of this specification sheet and procurement specification FF-S-92.

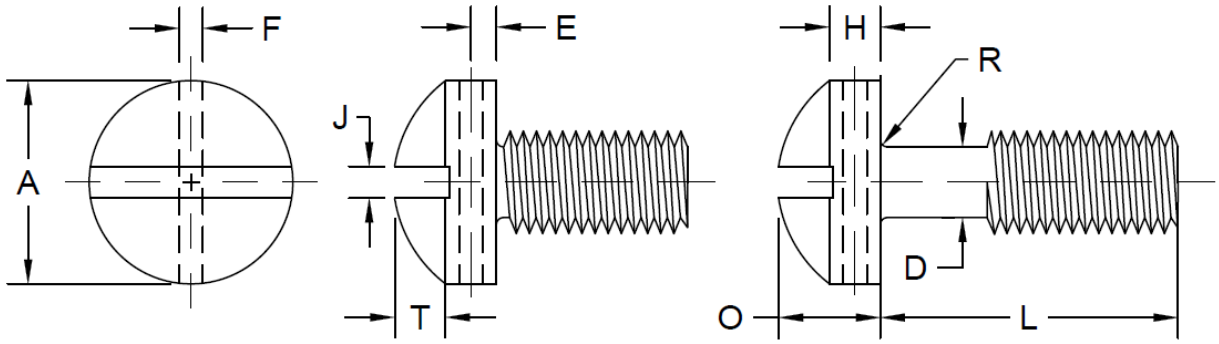


FIGURE 1. Screw, machine - drilled fillister head, slotted, carbon steel, UNC-2A.

Comments, suggestions, or questions on this document should be addressed to DLA Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or emailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 5305

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions (inch).

NOMINAL SIZE			0.0863	0.1120	0.1375	0.1640	0.1900	0.2500	0.3125	0.3750
THREADS PER INCH, UNC 2A			56	40	32	32	24	20	18	16
D	BODY DIAMETER	MAX	0.0860	0.1120	0.1380	0.1640	0.1900	0.2500	0.3125	0.3750
		MIN	0.0717	0.0925	0.1141	0.1399	0.1586	0.2127	0.2712	0.3287
A	HEAD DIAMETER	MAX	0.140	0.183	0.226	0.270	0.313	0.414	0.518	0.622
		MIN	0.124	0.166	0.208	0.250	0.292	0.389	0.490	0.590
H	HEAD SIDE HIEGHT	MAX	0.062	0.079	0.096	0.113	0.130	0.170	0.211	0.253
		MIN	0.055	0.072	0.089	0.106	0.123	0.161	0.201	0.242
O	TOTAL HEAD HIEGHT	MAX	0.083	0.107	0.132	0.156	0.180	0.237	0.295	0.355
		MIN	0.070	0.094	0.118	0.141	0.165	0.219	0.276	0.333
J	SLOT WIDTH	MAX	0.031	0.039	0.048	0.054	0.060	0.075	0.084	0.094
		MIN	0.023	0.031	0.039	0.043	0.050	0.064	0.072	0.081
T	SLOT DEPTH	MAX	0.030	0.038	0.045	0.065	0.075	0.102	0.130	0.154
		MIN	0.022	0.030	0.035	0.054	0.064	0.087	0.110	0.134
E	DRILL LOCATION	NOM	0.026	0.035	0.043	0.043	0.043	0.062	0.078	0.094
F	DRILLED HOLE DIAMETER	NOM	0.031	0.037	0.046	0.046	0.046	0.062	0.070	0.070
R	RADIUS	MAX	0.013	0.017	0.021	0.025	0.028	0.038	0.047	0.056
Tensile Strength (psi)		MIN	55,000	55,000	55,000	55,000	55,000	55,000	55,000	55,000
L	LENGTH	TOLERANCE	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
0.12			501	511	524	539				
0.19			502	512	525	540	558			
0.25			503	513	526	541	559			
0.31			504	514	527	542	560	576		
0.38			505	515	528	543	561	577	592	
0.44		+0.00 -0.03	506	516	529	544	562	578	593	
0.50			507	517	530	545	563	579	594	607
0.62			508	518	531	546	564	580	595	608
0.75			509	519	532	547	565	581	596	609
0.88			510	520	533	548	566	582	597	610
1.00				521	534	549	567	583	598	611
1.25				522	535	550	568	584	599	612
1.50		+0.00 -0.06		523	536	551	569	585	600	613
1.75					537	552	570	586	601	614
2.00					538	553	571	587	602	615
2.25						554	572	588	603	616
2.50		+0.00 -0.09				555	573	589	604	617
2.75						556	574	590	605	618
3.00						557	575	591	606	619

NOTES:

Screws cannot be used for metric use when directly converted to metric, as such, no metric conversion is given.

All dimensions are in inches.

REQUIREMENTS:

1. Material. Carbon steel in accordance with SAE-AIR4127. The minimum ultimate tensile strength shall be 60,000 PSI.

2. Protective finish: Zinc-Nickel plate in accordance with MIL-PRF-32647, Type K16 or Cadmium plate /1 in accordance with SAE AMS-QQ-P-416, Type II, Class 3. Note: Original dash numbers using Cadmium are inactive for new design, replacement dash numbers are Zinc-Nickel only, see Table II for replacement information.

/1 Cadmium is an R1, R2, and D1 substance in the Aerospace and Defense Declarable Substance List. Zinc-Nickel plate per MIL-PRF-32647, Type K16 is the preferred replacement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

3. Threads. Threads shall be in accordance with ASME B1.1.
4. Thread length. Full form threads shall extend to within two (2) threads or less of the head bearing surface for full lengths thru 3.00 inches. Longer lengths shall have a minimum full form thread length of 1.50 inches.
5. Part or Identifying Number (PIN). The PIN consists of the following:

MS35265 – 576

- 576: Dash number from Table I indicating size/dimensions (cross-referenced to Figure 1.)
- MS35265: Specification sheet number

Example: MS27952-576 is a slotted machine screw with a drilled fillister head, nominal diameter of 0.2500 inch, 20 threads per inch, with a length of 0.031 inch, and Type K16 Zinc-Nickel plated.

TABLE II. Inactive for new design and replacement part numbers.

PIN					
MS35265 - Inactive for new Design	MS35265 - Superseded by	MS35265 - Inactive for new Design	MS35265 - Superseded by	MS35265 - Inactive for new Design	MS35265 - Superseded by
1	501	41	541	81	581
2	502	42	542	82	582
3	503	43	543	83	583
4	504	44	544	84	584
5	505	45	545	85	585
6	506	46	546	86	586
7	507	47	547	87	587
8	508	48	548	88	588
9	509	49	549	89	589
10	510	50	550	90	590
11	511	51	551	91	591
12	512	52	552	92	592
13	513	53	553	93	593
14	514	54	554	94	594
15	515	55	555	95	595
16	516	56	556	96	596
17	517	57	557	97	597
18	518	58	558	98	598
19	519	59	559	99	599
20	520	60	560	100	600
21	521	61	561	101	601
22	522	62	562	102	602
23	523	63	563	103	603
24	524	64	564	104	604
25	525	65	565	105	605
26	526	66	566	106	606
27	527	67	567	107	607
28	528	68	568	108	608
29	529	69	569	109	609
30	530	70	570	110	610
31	531	71	571	111	611
32	532	72	572	112	612
33	533	73	573	113	613
34	534	74	574	114	614
35	535	75	575	115	615
36	536	76	576	116	616
37	537	77	577	117	617
38	538	78	578	118	618
39	539	79	579	119	619
40	540	80	580		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

NOTE: Replacement part numbers are Zinc-Nickel, Type K16 plated screws. These are for new design and may be used for sustainment.

6. Drilled hole. The drilled hole shall be approximately at right angle to the slot and may be permitted to break through the bottom of the slot. All burrs and sharp edges shall be removed.

7. Conformance. Certificates of compliance to paragraph 1, 2, and 3 shall be provided to verify conformance.

8. Design. For design feature purposes, this document takes precedence over all other documents.

9. Documents. Referenced documents shall be of the issue in effect on the date of the invitation for bids. Copies of FF-S-92, and MIL-PRF-32647 are available online at https://quicksearch.dla.mil. Copies of SAE AIR4127 and SAE AMS-QQ-P-416 specifications are available online at https://www.sae.org/standards. Copies of ASME B1.1 are available online at https://www.asme.org/.

CONCLUDING MATERIAL

Custodians:
Army – AR
Air Force – 99
DLA – GS

Review Activity:
Army – AT, AV, CR4, MI

Preparing Activity:
DLA – GS7

(Project 5305-2023-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.