DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities:
ARMY-AV,EA
AIR FORCE-82
DLA-IS

User activities:
ARMY-AT,MI
NAVY-MC,OS,YD
NSA-NS



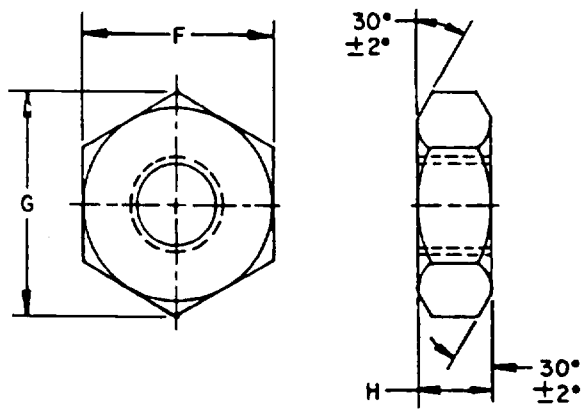



TABLE I. DASH NUMBERS AND DESIGN CONFIGURATIONS.

| DASH NUMBER | | | | THREAD SIZE | F WIDTH ACROSS FLATS | | G WIDTH ACROSS CORNERS | | E THICKNESS | |
|---|---|---|---|---|---|---|---|---|---|---|
| CARBON STEEL | | CRES STEEL | BRASS | | MAX | MIN | MAX | MIN | MAX | MIN |
| CAD | PHOS | | | | | | | | | |
| 312 | 13 | 314 | 315 | .0600-80UNF-2B | .156 | .150 | .180 | .171 | .050 | .043 |
| 322 | 23 | 324 | 325 | .0860-64UNF-2B | .187 | .180 | .217 | .205 | .066 | .057 |
| 342 | 43 | 344 | 345 | .1120-48UNF-2B | .250 | .241 | .289 | .275 | .096 | .087 |
| 362 | 63 | 364 | 365 | .1380-40UNF-2B | .312 | .302 | .361 | .344 | .114 | .102 |
| 382 | 83 | 384 | 386 | .1640-36UNF-2B | .344 | .332 | .397 | .378 | .130 | .117 |
| 302 | 103 | 304 | 305 | .1900-32UNF-2B | .375 | .362 | .433 | .413 | .130 | .117 |
| 3252 | — | 3254 | 3255 | .2500-28UNF-2B | .437 | .423 | .505 | .489 | .193 | .178 |
| 3312 | — | 3314 | 3315 | .3125-24UNF-2B | .562 | .545 | .650 | .621 | .225 | .208 |
| 3382 | — | 3384 | 3385 | .3750-24UNF-2B | .625 | .607 | .722 | .692 | .257 | .239 |
| 3392 | — | 3394 | 3395 | .5000-20UNF-2B | .813 | .788 | .940 | .898 | .443 | .402 |
| 3402 | — | 3404 | 3405 | .6250-18UNF-2B | 1.000 | .969 | 1.155 | 1.104 | .553 | .509 |

REQUIREMENTS:

1. MATERIAL: STEEL, CARBON, SHALL BE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
STEEL, CORROSION RESISTANT, SERIES 302 THRU 305 (UNS S30200 THRU UNS S30500), 316 (UNS S31600), 317 (UNS S31700) AND 347 (UNS S34700), IN ACCORDANCE WITH PROCUREMENT SPECIFICATION
BRASS, ALLOY 462 (UNS C46200) OR 464 (UNS C46400) IN ACCORDANCE WITH QQ-B-637 OR ALLOY 360 (UNS C36000), IN ACCORDANCE WITH QQ-B-626.

2. MAGNETIC PERMEABILITY: CORROSION RESISTANT STEEL FASTENERS SHALL HAVE A MAGNETIC PERMEABILITY OF 2.00 MAXIMUM (AIR = 1.00) AT A FIELD STRENGTH OF H = 200 OERSTEDS USING A MAGNETIC INDICATOR IN ACCORDANCE WITH MIL-I-17214.

3. PROTECTIVE COATING AND SURFACE TREATMENT: STEEL, CARBON-CADMIUM PLATING OR PHOSPHATE COATING IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
STEEL, CRES - CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH ASTM A380.
BLACK OXIDE COATING IN ACCORDANCE WITH MIL-C-13924, CLASS 1.
BRASS - BLACK OXIDE COATED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
TIN PLATED IN ACCORDANCE WITH ASTM B545 , .0001 INCH THICK.
SILVER PLATED IN ACCORDANCE WITH QQ-S-365, .0001 INCH THICK.
NICKEL PLATED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

4. THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/21, SYSTEM 21.

Ⓖ ENTIRE STANDARD REVISED

APPROVED 22 DEC 55 REVISED Ⓖ 7 OCT 85

| P.A. | INTERNATIONAL INTEREST | TITLE | |
|---|---|---|---|
| AR | | NUT, PLAIN, HEXAGON, MACHINE SCREW, UNF-2B | MILITARY STANDARD |
| Other Cust 99 | | | MS35650 |
| PROCUREMENT SPECIFICATION FF-N-836 | SUPERSEDES: AN341 IN PART, AN345 IN PART, MS20341 IN PART | | PAGE 1 OF 3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.

5. PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS SHEET NUMBER FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I, FOLLOWED BY THE FINISH CODE LETTERS ("B" FOR BLACK OXIDE), ("N" FOR NICKEL PLATED), ("S" FOR SILVER PLATED), ("T" FOR TIN PLATED) AND NO CODE LETTER FOR CADMIUM PLATE OR PHOSPHATE COATING.

EXAMPLE: MS35650-325B

- FINISH CODE (SEE REQT 3)
  - "B" BLACK OXIDE
  - "N" NICKEL PLATED
  - "S" SILVER PLATED
  - "T" TIN PLATED
  - NO CODE LETTER FOR CADMIUM PLATE OR PHOSPHATE COATING (SEE TABLE I)
- DASH NUMBER
- BASIC MS SHEET NUMBER

MS35650-325B INDICATES - NUT, PLAIN, HEXAGON, MACHINE SCREW, THREAD SIZE .0860-64UNF-2B; BRASS, BLACK OXIDE COATED.

MS PART NUMBERS FOR BRASS NUTS SINCE MS 35650 REVISION F HAVE REQUIRED A "B" IN THE PART NUMBER TO INDICATE BLACK OXIDE COATING. PRIOR TO MS35650 REVISION F, PAST REVISIONS DID NOT REQUIRE THE "B" IN THE BRASS NUT PART NUMBER TO DENOTE BLACK OXIDE COATING. IN EITHER CASE i.e., FORMER PRACTICE (WITHOUT THE "B") OR PRESENT PRACTICE (WITH THE "B") THE MS35650 PART NUMBER FOR BRASS NUTS REQUIRE BLACK OXIDE COATING.

NOTES

1. DIMENSIONS ARE IN INCHES.
2. NUTS SHALL BE FREE OF ALL LOOSE OR HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
3. NUTS SPECIFIED HEREIN ARE TYPE II, STYLE 13 IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCE CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
5. REFERENCED GOVERNMENT (OR NON GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 22 DEC 85 REVISED (G) FOR CHANGES SEE PAGES 1, 2 AND 3

User activities:
ARMY-AT,MI
NAVY-MC,OS,YD
NSA-NS

Review activities:
ARMY-AV,EA
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A. AR | INTERNATIONAL INTEREST | TITLE NUT, PLAIN, HEXAGON, MACHINE SCREW, UNF-2B | MILITARY STANDARD MS35650 |
|---|---|---|---|
| Other Cust 99 | | | |
| PROCUREMENT SPECIFICATION FF-N-836 | SUPERSEDES AN341 IN PART, AN345 IN PART, MS20341 IN PART | | PAGE 2 OF 3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLES OF CANCELLED AND SUPERSEDING PART NUMBERS

THE FOLLOWING DASH NUMBERS AS GIVEN IN THE ORIGINAL ISSUE OF THIS STANDARD ARE CANCELLED AFTER 8 SEP 1966. THE CANCELLED NUTS SHOULD BE USED FOR MAINTENANCE PURPOSES UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE SUPERSEDING NUTS FOR NEW DESIGN.

TABLE II

| DASH NUMBERS | | | | | | | |
|---|---|---|---|---|---|---|---|
| CANCELLED MS35650 | SUPERSEDING MS35650 | CANCELLED MS35650 | SUPERSEDING MS35650 | CANCELLED MS35650 | SUPERSEDING MS35650 | CANCELLED MS35650 | SUPERSEDING MS35650 |
| 21 | 322 | 44 | 344 | 65 | 365 | 86 | 386 |
| 22 | 322 | 45 | 345 | 66 | 365 | 101 | 302 |
| 24 | 324 | 46 | 345 | 81 | 382 | 102 | 302 |
| 25 | 325 | 61 | 362 | 82 | 382 | 104 | 304 |
| 26 | 325 | 62 | 362 | 84 | 384 | 105 | 305 |
| 41 | 342 | 64 | 364 | 85 | 386 | 106 | 305 |
| 42 | 342 | | | | | | |

THE FOLLOWING DASH NUMBERS OF AN341, AN345, AND MS20341 ARE CANCELLED AFTER 17 APR 1968. THE CANCELLED NUTS SHOULD BE USED FOR MAINTENANCE PURPOSES UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE SUPERSEDING NUTS OF MS35650 FOR NEW DESIGN.

TABLE III

| DASH NUMBERS | |
|---|---|
| CANCELLED | SUPERSEDING |
| AN345 | MS35650 |
| 0 | 312 |
| C0 | 314 |
| B0 | 315 |
| 2 | 322 |
| C2 | 324 |
| B2 | 325 |
| 4 | 342 |
| C4 | 344 |
| B4 | 345 |
| 6 | 362 |
| C6 | 364 |
| B6 | 365 |
| 8 | 382 |
| C8 | 384 |
| B8 | 386 |

| DASH NUMBERS | | | |
|---|---|---|---|
| CANCELLED | | | SUPERSEDING |
| AN345 | AN341 | MS20341 | MS35650 |
| 10 | — | 10S | 302 |
| C10 | — | 10C | 304 |
| B10 | — | — | 305 |
| — | 10 | 10A | 305T |
| — | — | 10B | 305S |
| 416 | — | 416S | 3252 |
| C416 | — | 416C | 3254 |
| B416 | — | — | 3255 |
| — | 416 | 416A | 3255T |
| — | — | 416B | 3255S |
| 516 | — | 516S | 3312 |
| C516 | — | 516C | 3314 |
| B516 | — | — | 3315 |
| — | 516 | 516A | 3315T |
| — | — | 516B | 3315S |
| 616 | — | 616S | 3382 |
| C616 | — | 616C | 3384 |
| B616 | — | — | 3385 |

| DASH NUMBERS | | |
|---|---|---|
| CANCELLED | | SUPERSEDING |
| AN341 | MS20341 | MS35650 |
| 616 | 616A | [illegible] |
| — | 616B | [illegible] |
| — | 816S | [illegible] |
| — | 816C | [illegible] |
| 816 | 816A | [illegible] |
| — | 816B | [illegible] |
| — | 1016S | [illegible] |
| — | 1016C | [illegible] |
| 1016 | 1016A | [illegible] |
| — | 1016B | [illegible] |

FOR CHANGES SEE PAGES 1, 2 AND 3

Approved 22 DEC 65 REVISED

User activities:
ARMY-AT, MI
NAVY-MC, OS, YD
NSA-NS

Review activities:
ARMY-AV, EA
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A. AR | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| Other Cust 99 | | NUT, PLAIN, HEXAGON, MACHINE SCREW, UNF-2B | MS35650 |
| PROCUREMENT SPECIFICATION FF-N-836 | SUPERSEDES AN341 IN PART, AN345 IN PART, MS20341 IN PART | | PAGE 3 OF 3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.