FED. SUP CLASS
4730

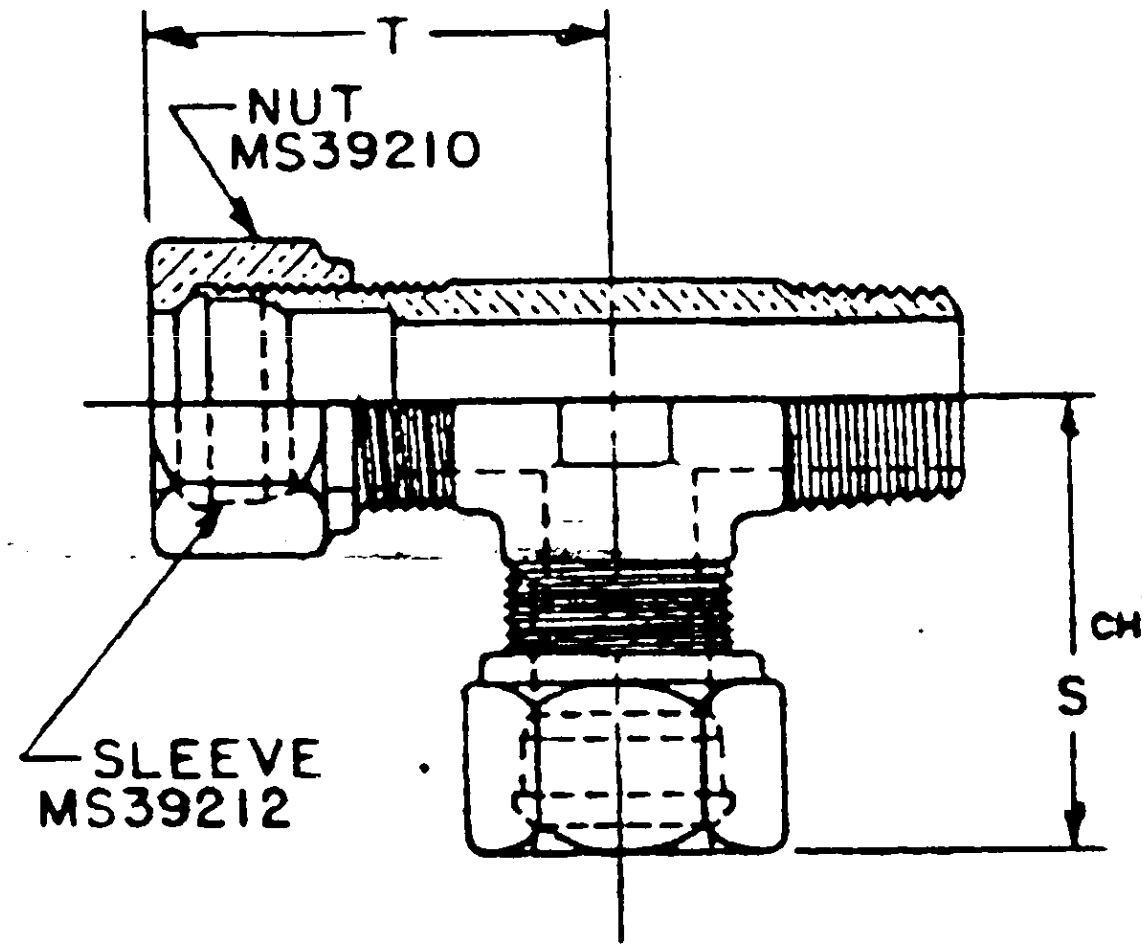

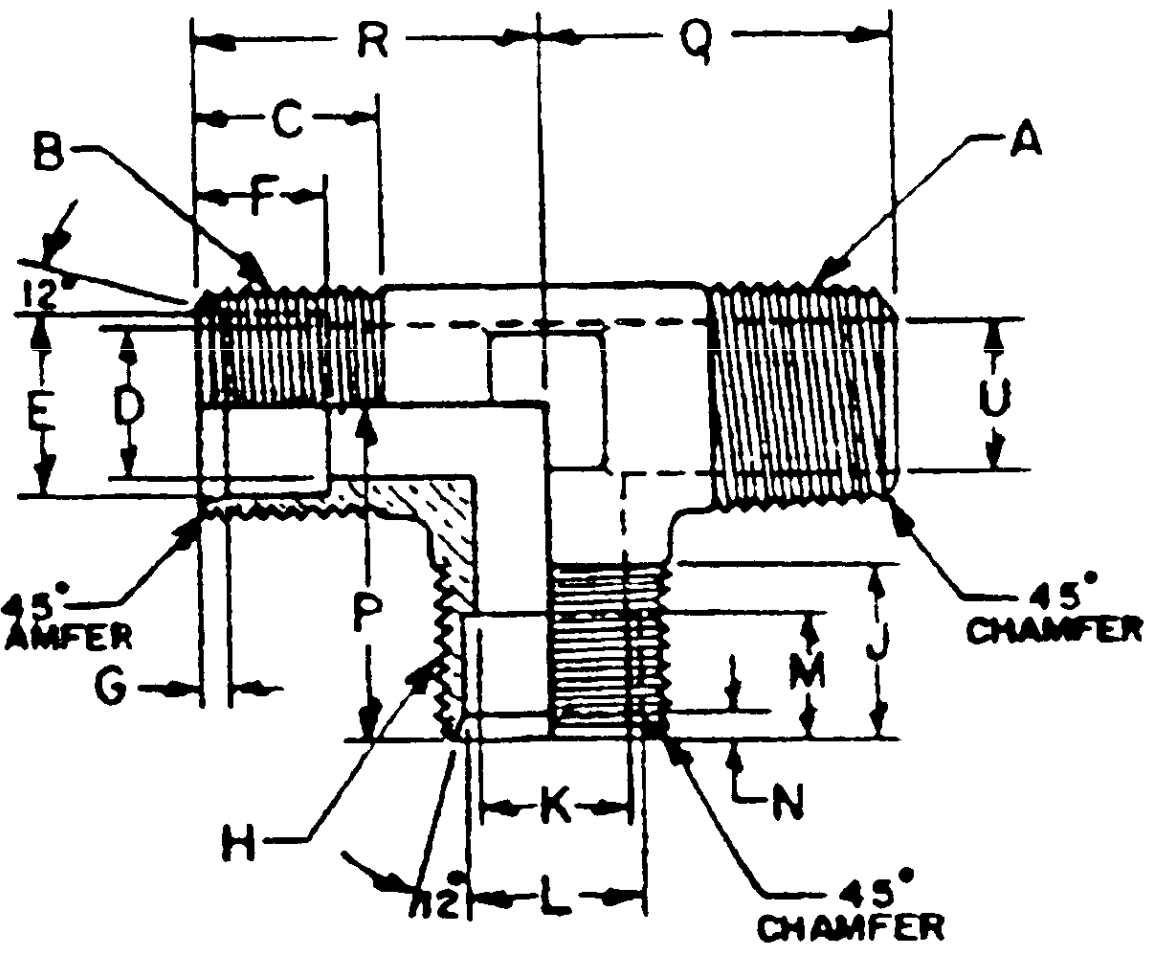

DETAIL OF BODY

DASH NO.	TUBE O.D.		A PIPE THREADS NPTF	B	C	D	E	F	G	H	J	K	L
1	1/8	1/8	1/8	5/16-24UNF-2A	9/32	3/32	.135 .139	13/64	1/8	5/16-24UNF-2A	9/32	3/32	.135 .139
2	3/16	3/16	1/8	3/8 -24UNF-2A	9/32	1/8	.196 .200	1/4	5/32	3/8 -24UNF-2A	9/32	1/8	.196 .200
3	1/4	1/4	1/8	1/2 -20UNF-2A	13/32	13/64	.261 .265	19/64	13/64	1/2 -20UNF-2A	13/32	13/64	.261 .265
4	5/16	5/16	1/8	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64	9/16-18UNF-2A	13/32	13/64	.324 .328
5	1/4	1/4	1/4	1/2 -20UNF-2A	13/32	13/64	.261 .265	19/64	13/64	1/2 -20UNF-2A	13/32	13/64	.261 .265
6	3/8	3/8	1/4	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	5/8 -18UNF-2A	7/16	9/32	.386 .390
7	1/2	1/4	1/4	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	1/2 -20UNF-2A	13/32	13/64	.261 .265
8	1/2	3/8	1/4	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	5/8 -18UNF-2A	7/16	9/32	.386 .390

INACTIVE FOR NEW DESIGN. USE FOR MAINTENANCE PURPOSES ONLY. FOR NEW DESIGN USE MS51824.
Ⓒ

DASH NO.	M	N	P	Q	R	S	T	U
1	13/64	1/8	21/32	3/4	21/32	31/32	31/32	13/64
2	1/4	5/32	21/32	3/4	21/32	1	1	13/64
3	19/64	13/64	3/4	25/32	3/4	1 5/32	1 5/32	13/64
4	19/64	13/64	13/16	25/32	13/16	1 3/16	1 3/16	13/64
5	19/64	13/64	7/8	1 1/16	7/8	1 9/32	1 9/32	9/32
6	19/64	13/64	15/16	1 1/16	15/16	1 3/8	1 3/8	9/32
7	19/64	13/64	1 1/8	1 3/16	1 1/8	1 17/32	1 21/32	9/32
8	19/64	13/64	1 1/8	1 3/16	1 1/8	1 9/16	1 21/32	9/32

APPROVED 24 APRIL 1962 REVISED Ⓐ 29 DEC 67 Ⓑ 10 OCT 74 Ⓒ 3 FEB 75 Ⓓ 13 MAY 77 Ⓔ 26 FEB 82

This military ...ndard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

P.A. ARMY-AT Other Cust	TITLE TEES, PIPE TO TUBE - SAFETY SLEEVE COMPRESSION TYPE, MALE PIPE END	MILITARY STANDARD MS39211(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination)   4730-A224

Source: https://assist.dla.mil -- Downloaded: 2026-04-23T17:48Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

DASH NO.	TUBE O.D.		A PIPE THREADS NPTF	B	C	D	E	F	G	H	J	K	L
9	1/2	1/2	1/4	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	3/4 -16UNF-2A	7/16	27/64	.514 .518
10	3/8	1/2	3/8	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	3/4 -16UNF-2A	7/16	27/64	.514 .518
11	1/2	1/2	3/8	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	3/4 -16UNF-2A	7/16	27/64	.514 .518
12	3/8	3/8	1/2	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	5/8 -18UNF-2A	7/16	9/32	.386 .390
13	1/2	1/2	1/2	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	3/4 -16UNF-2A	7/16	27/64	.514 .518
14	5/8	5/8	1/2	15/16-16UN-2A	5/32	1/2	.641 .645	11/32	15/64	15/16-16UN-2A	15/32	1/2	.641 .645
15	3/4	3/4	3/4	1 1/16-16UN-2A	15/32	21/32	.766 .770	11/32	13/64	1 1/16-16UN-2A	15/32	21/32	.766 .770
16	7/8	7/8	3/4	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64	1 3/16-16UN-2A	15/32	23/32	.891 .895
17	1	1	1	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64	1 5/16-16UN-2A	15/32	7/8	1.016 1.020
18	1 1/4	1 1/4	1 1/4	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274
19	1 1/2	1 1/2	1 1/2	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524

DASH NO.	M	N	P	Q	R	S	T	U
9	5/16	13/64	1 1/8	1 3/16	1 1/8	1 21/32	1 21/32	9/32
10	5/16	13/64	1 1/8	1 3/16	1 1/8	1 21/32	1 9/16	7/16
11	5/16	13/64	1 1/8	1 3/16	1 1/8	1 21/32	1 21/32	27/64
12	19/64	13/64	1 1/16	1 11/32	1 1/16	1 1/2	1 1/2	1/2
13	5/16	13/64	1 1/8	1 1/4	1 1/8	1 21/32	1 21/32	1/2
14	11/32	15/64	1 5/16	1 7/16	1 5/16	1 27/32	1 27/32	1/2
15	11/32	13/64	1 1/2	1 9/16	1 1/2	2 3/32	2 3/32	23/32
16	11/32	13/64	1 3/4	1 3/4	1 3/4	2 11/32	2 11/32	23/32
17	13/32	13/64	1 3/4	1 15/16	1 3/4	2 11/32	2 11/32	7/8
18	13/32	13/64	2 1/4	2 5/16	2 1/4	2 7/8	2 7/8	1 3/32
19	15/32	13/64	2 3/8	2 9/16	2 3/8	3 1/16	3 1/16	1 11/32

MATERIAL: STEEL, IN ACCORDANCE WITH FEDERAL STANDARD NO. 66, AISI-C-1112, C-1113, C-1117, C-1118 OR C-1137.

FINISH: CADMIUM PLATED, SPECIFICATION QQ-P-416, TYPE II, CLASS 3.

TOLERANCE: UNLESS OTHERWISE SPECIFIED, DECIMALS ± .005, FRACTIONS ± 1/64, DEGREES ± 2°.

THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH MIL-STD-H28/2/8.

DIMENSIONS: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.

PART NUMBER: THE PART NUMBER CONSISTS OF MS NUMBER PLUS THE DASH NUMBER, EXAMPLE: MS39211-1.
THE PART NUMBER COVERS THE COMPLETE ITEM (WITH NUTS AND SLEEVES).

NOTES: 1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

2. THIS ILLUSTRATION IS FOR IDENTIFICATION AND IS NOT INTENDED TO RESTRICT DESIGNS OR SHAPES NOT DIMENSIONED.

INACTIVE – SEE SHEET 1.

APPROVED 24 APRIL 1962 REVISED

P.A.
Other Cust

TITLE
TEES, PIPE TO TUBE - SAFETY SLEEVE COMPRESSION
TYPE, MALE PIPE END

MILITARY STANDARD
MS39211 (AT)

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES

SHEET 2 OF 2

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:48Z
Check the source to verify that this is the current version before use.