INCH-POUND

MS51514C
27 October 2016
SUPERSEDING
MS51514B
14 December 2015


DETAIL SPECIFICATION SHEET

TEE, PIPE TO TUBE, FEMALE PIPE ON RUN 37 DEGREE FLARED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design after 17 August 1999. For new design, use SAE-J514.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18866.

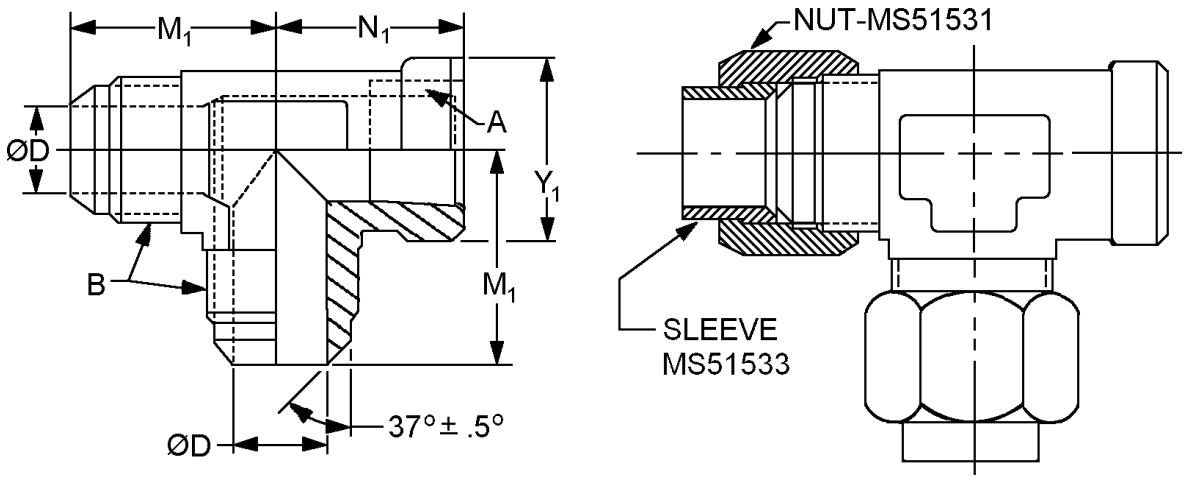

See notes at end of figure.

FIGURE 1. Tee, female pipe on run.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

Suffix designator		Tube OD nom.	A Thread NPTF	B Straight thread	D diameter	
Assembly (see note 4)	Body				Basic inches (mm)	Tolerance inches (mm)
A2	B2	.1250 (3.175)	.125 -27	.3125-24 UNF-2A	.062 (1.57)	±.003 (0.08)
A3	B3	.1875 (4.763)	.125 -27	.3750-24 UNF-2A	.125 (3.18)	
A4	B4	.2500 (6.350)	.125 -27	.4375-20 UNF-2A	.172 (4.37)	
A5	B5	.3125 (7.938)	.125 -27	.5000-20 UNF-2A	.234 (5.94)	
A6	B6	.3750 (9.525)	.250 - 18	.5625-18 UNF-2A	.297 (7.54)	±.004 (0.10)
A8	B8	.5000 (12.700)	.375 - 18	.7500-16 UNF-2A	.391 (9.93)	
A10	B10	.6250 (15.875)	.500 - 14	.8750-14 UNF-2A	.484 (12.29)	
A12	B12	.7500 (19.050)	.750 - 14	1.0625-12 UN-2A	.609 (15.47)	±.005 (0.13)
A14	B14	.8750 (22.225)	.750 - 14	1.1875-12 UN-2A	.718 (18.24)	
A16	B16	1.0000 (25.400)	1.000 - 11 1/2	1.3125-12 UN-2A	.844 (21.44)	±.007 (0.18)
A20	B20	1.2500 (31.750)	1.250 - 11 1/2	1.6250-12 UN-2A	1.078 (27.38)	+.008 -.005 (+0.20 -0.13)
A24	B24	1.5000 (38.100)	1.500 - 11 1/2	1.8750-12 UN-2A	1.312 (33.32)	
A32	B32	2.0000 (50.800)	2.000 - 11 1/2	2.500-12 UN-2A	1.781 (45.24)	+.010 -.005 (+0.25 -.013)

Suffix designator		M_1 inches (mm) ±.030 (0.76)	N_1 inches (mm) ±.030 (0.76)	Y_1 inches (mm) ±.020 (0.51)
Assembly	Body			
A2	B2	1.000 (25.40)	.660 (16.76)	.562 (14.27)
A3	B3	1.030 (26.16)	.660 (16.76)	.562 (14.27)
A4	B4	1.080 (27.43)	.660 (16.76)	.562 (14.27)
A5	B5	1.080 (27.43)	.660 (16.76)	.562 (14.27)
A6	B6	1.230 (31.24)	.880 (22.35)	.750 (19.05)
A8	B8	1.420 (36.07)	1.020 (25.91)	.875 (22.23)
A10	B10	1.640 (41.66)	1.230 (31.24)	1.062 (26.97)
A12	B12	1.890 (48.01)	1.360 (34.54)	1.312 (33.32)
A14	B14	1.860 (47.24)	1.420 (36.07)	1.312 (33.32)
A16	B16	2.170 (55.12)	1.620 (41.15)	1.625 (41.28)
A20	B20	2.330 (59.18)	1.700 (43.18)	1.875 (47.63)
A24	B24	2.890 (73.41)	2.080 (52.83)	2.562 (65.07)
A32	B32	3.300 (83.82)	2.390 (60.71)	2.812 (71.42)

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Break all sharp edges, remove all burrs, and slivers.
4. Assemblies are only furnished to this specification (body, nuts, and sleeves). Bodies are not to be stocked, stored, or issued.
5. Dimensions and tolerances not shown shall be in accordance with SAE-J514 for 37° flared fittings.
6. The drawing is for identification purposes only and is not intended to restrict designs and shapes not dimensioned.

FIGURE 1. Tee, female pipe on run. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Fittings shall be as specified on figure 1 and in table I.

Components of the assemblies shall be of the same material and finish.

Materials shall be in accordance with MIL-DTL-18866.

Finish. Finishes shall be as specified in table I. All platings shall be capable of meeting a minimum of 96 hours salt spray test in accordance with ASTM B117. The fittings shall show no evidence of corrosion after 96 hours of salt spray. Fluid passages, other openings and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.

TABLE I. Material and finish identification codes.

PIN code material/plating finish	Material	Plating finish
Blank	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2. 1/
H	Steel	Zinc-Aluminum in accordance with ASTM F1136/F1136M, grade 3, NC.
J	Steel	Zinc-nickel in accordance with SAE-AMS2417, type 2, grade B. 2/
M	Nickel-copper alloy UNS N04400	No additional finish.
N	High-chromium nickel alloy UNS N06690	No additional finish.
P	Steel	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 1. 3/ 4/
R	Steel	Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 8. 4/
S	Corrosion resistant steel	No additional finish. Passivation in accordance with SAE-AMS2700, method 1, type 6 or 7.
T	Titanium	Anodize in accordance with SAE-AMS2488 type 2. 5/
TF	Titanium	Fluoride phosphate in accordance with SAE-AMS2486. 5/
Z	Steel	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 8, or ASTM B695, type II, class 8. 4/
ZC	Steel	Zinc may be any zinc plating from PIN codes H, J, and R with a colored chromate coating. 4/

1/ Embrittlement test need not be run. Cadmium shall not be used in oxygen or potable water systems.
2/ The zinc-nickel alloy plate shall contain 12% to 16% nickel. The coating thickness shall be 315µ inches (8µm) minimum.
3/ Hexavalent chromium free. Finish shall be ROHS compliant.
4/ Not for use in aircraft. Requires approval from the Program Office for all applications.
5/ A pretreatment, a modification of the fluoride treatment, or a post treatment shall be applied so the final color of the fittings shall be similar to FED-STD-595 colors 36076 through 36293. Titanium shall not be used in oxygen or potable water systems.


Trivalent wrenchability. When the finish has been damaged due to poor wrenchability, the surface of the connector shall be touched up using one of the brush plating processes below as appropriate to primary finish. The term “trivalent wrenchability” is used to evaluate the ability of the finish to withstand abrasion from an excessive amount of wrenching.

a. Brush plating of hard chromium by electrodeposition shall be in accordance with SAE-AMS-2451/5.
b. Brush plating of medium-hardness, low stress nickel by electrodeposition shall be in accordance with SAE-AMS-2451/9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

Maximum operating pressure. Maximum operating pressure shall be in accordance with SAE-J514.

PIN: The PIN consists of the letters “MS”, the specification number, a letter and number for tee size, and a letter for material finish designator.

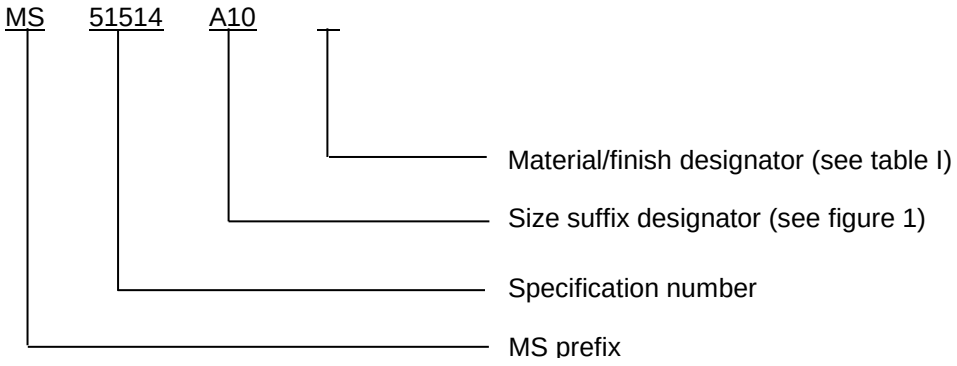

PIN example: MS51514A10 indicates a tee, pipe to tube, .6250 inch (15.875 mm), steel cadmium plated.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Table II provides a detailed cross-reference of inactive MS51514 PIN’s and for new design SAE-J514 PIN’s.

MS51514 parts have straight threads in accordance with ASME B1.1 the SAE parts have straight threads in accordance with SAE-J425.

Plating “P” SAE allows a range of nickel from 6% to 20%. Below 12%, ZnNi is not much better than zinc plating, which is less expensive and easier to apply. Above 16%, ZnNi becomes more cathodic and no longer acts as a sacrificial coating - if a high nickel coating is damaged the steel beneath the coating will corrode at an accelerated rate.

SAE parts are exposed to a 72-hour salt spray test in lieu of 96 hours.

Users are cautioned to evaluate replacement parts for their particular application.

CAUTION: The superseding information is valid as of the date of this specification and may be superseded by subsequent revisions of the superseding document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE II. MS51514 to SAE-J514 cross reference.

Inactive for new design MS51514 PIN		Tube O.D.	Pipe thread NPTF	For new design SAE-J514 PIN	
Assembly	Body			Assembly	Body
MS51514A2	MS51514B2	1/8	1/8	Not available	Not available
MS51514A2H	MS51514B2H	1/8	1/8	Not available	Not available
MS51514A2J	MS51514B2J	1/8	1/8	Not available	Not available
MS51514A2M	MS51514B2M	1/8	1/8	J514-2-2-2-070426MA	J514-2-2-2-070426MB
MS51514A2N	MS51514B2N	1/8	1/8	J514-2-2-2-070426NA	J514-2-2-2-070426NB
MS51514A2P	MS51514B2P	1/8	1/8	J514-2-2-2-070426PA	J514-2-2-2-070426PB
MS51514A2R	MS51514B2R	1/8	1/8	Not available	Not available
MS51514A2S	MS51514B2S	1/8	1/8	J514-2-2-2-070426SA	J514-2-2-2-070426SB
MS51514A2T	MS51514B2T	1/8	1/8	J514-2-2-2-070426TA	J514-2-2-2-070426TB
MS51514A2TF	MS51514B2TF	1/8	1/8	Not available	Not available
MS51514A2Z	MS51514B2Z	1/8	1/8	J514-2-2-2-070426ZA	J514-2-2-2-070426ZB
MS51514A2ZC	MS51514B2ZC	1/8	1/8	Not available	Not available
MS51514A3	MS51514B3	3/16	1/8	Not available	Not available
MS51514A3H	MS51514B3H	3/16	1/8	Not available	Not available
MS51514A3J	MS51514B3J	3/16	1/8	Not available	Not available
MS51514A3M	MS51514B3M	3/16	1/8	J514-3-3-2-070426MA	J514-3-3-2-070426MB
MS51514A3N	MS51514B3N	3/16	1/8	J514-3-3-2-070426NA	J514-3-3-2-070426NB
MS51514A3P	MS51514B3P	3/16	1/8	J514-3-3-2-070426PA	J514-3-3-2-070426PB
MS51514A3R	MS51514B3R	3/16	1/8	Not available	Not available
MS51514A3S	MS51514B3S	3/16	1/8	J514-3-3-2-070426SA	J514-3-3-2-070426SB
MS51514A3T	MS51514B3T	3/16	1/8	J514-3-3-2-070426TA	J514-3-3-2-070426TB
MS51514A3TF	MS51514B3TF	3/16	1/8	Not available	Not available
MS51514A3ZC	MS51514B3ZC	3/16	1/8	J514-3-3-2-070426ZA	J514-3-3-2-070426ZB
MS51514A3ZC	MS51514B3ZC	3/16	1/8	Not available	Not available
MS51514A4	MS51514B4	1/4	1/8	Not available	Not available
MS51514A4H	MS51514B4H	1/4	1/8	Not available	Not available
MS51514A4J	MS51514B4J	1/4	1/8	Not available	Not available
MS51514A4M	MS51514B4M	1/4	1/8	J514-4-4-2-070426MA	J514-4-4-2-070426MB
MS51514A4N	MS51514B4N	1/4	1/8	J514-4-4-2-070426NA	J514-4-4-2-070426NB
MS51514A4P	MS51514B4P	1/4	1/8	J514-4-4-2-070426PA	J514-4-4-2-070426PB
MS51514A4R	MS51514B4R	1/4	1/8	Not available	Not available
MS51514A4S	MS51514B4S	1/4	1/8	J514-4-4-2-070426SA	J514-4-4-2-070426SB
MS51514A4T	MS51514B4T	1/4	1/8	J514-4-4-2-070426TA	J514-4-4-2-070426TB
MS51514A4TF	MS51514B4TF	1/4	1/8	Not available	Not available
MS51514A4Z	MS51514B4Z	1/4	1/8	J514-4-4-2-070426ZA	J514-4-4-2-070426ZB
MS51514A4ZC	MS51514B4ZC	1/4	1/8	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE II. MS51514 to SAE-J514 cross reference - Continued.

Inactive for new design MS51514- PIN		Tube O.D.	Pipe thread NPTF	For new design SAE-J514 PIN	
Body	Assembly			Body	Assembly
MS51514A5	MS51514B5	5/16	1/8	Not available	Not available
MS51514A5H	MS51514B5H	5/16	1/8	Not available	Not available
MS51514A5J	MS51514B5J	5/16	1/8	Not available	Not available
MS51514A5M	MS51514B5M	5/16	1/8	J514-5-5-2-070426MA	J514-5-5-2-070426MB
MS51514A5N	MS51514B5N	5/16	1/8	J514-5-5-2-070426NA	J514-5-5-2-070426NB
MS51514A5P	MS51514B5P	5/16	1/8	J514-5-5-2-070426PA	J514-5-5-2-070426PB
MS51514A5R	MS51514B5R	5/16	1/8	Not available	Not available
MS51514A5S	MS51514B5S	5/16	1/8	J514-5-5-2-070426SA	J514-5-5-2-070426SB
MS51514A5T	MS51514B5T	5/16	1/8	J514-5-5-2-070426TA	J514-5-5-2-070426TB
MS51514A5TF	MS51514B5TF	5/16	1/8	Not available	Not available
MS51514A5Z	MS51514B5Z	5/16	1/8	J514-5-5-2-070426ZA	J514-5-5-2-070426ZB
MS51514A5ZC	MS51514B5ZC	5/16	1/8	Not available	Not available
MS51514A6	MS51514B6	3/8	1/4	Not available	Not available
MS51514A6H	MS51514B6H	3/8	1/4	Not available	Not available
MS51514A6J	MS51514B6J	3/8	1/4	Not available	Not available
MS51514A6M	MS51514B6M	3/8	1/4	J514-6-6-4-070426MA	J514-6-6-4-070426MB
MS51514A6N	MS51514B6N	3/8	1/4	J514-6-6-4-070426NA	J514-6-6-4-070426NB
MS51514A6P	MS51514B6P	3/8	1/4	J514-6-6-4-070426PA	J514-6-6-4-070426PB
MS51514A6R	MS51514B6R	3/8	1/4	Not available	Not available
MS51514A6S	MS51514B6S	3/8	1/4	J514-6-6-4-070426SA	J514-6-6-4-070426SB
MS51514A6T	MS51514B6T	3/8	1/4	J514-6-6-4-070426TA	J514-6-6-4-070426TB
MS51514A6TF	MS51514B6TF	3/8	1/4	Not available	Not available
MS51514A6Z	MS51514B6Z	3/8	1/4	J514-6-6-4-070426ZA	J514-6-6-4-070426ZB
MS51514A6ZC	MS51514B6ZC	3/8	1/4	Not available	Not available
MS51514A8	MS51514B8	1/2	3/8	Not available	Not available
MS51514A8H	MS51514B8H	1/2	3/8	Not available	Not available
MS51514A8J	MS51514B8J	1/2	3/8	Not available	Not available
MS51514A8M	MS51514B8M	1/2	3/8	J514-8-8-6-070426MA	J514-8-8-6-070426MB
MS51514A8N	MS51514B8N	1/2	3/8	J514-8-8-6-070426NA	J514-8-8-6-070426NB
MS51514A8P	MS51514B8P	1/2	3/8	J514-8-8-6-070426PA	J514-8-8-6-070426PB
MS51514A8R	MS51514B8R	1/2	3/8	Not available	Not available
MS51514A8S	MS51514B8S	1/2	3/8	J514-8-8-6-070426SA	J514-8-8-6-070426SB
MS51514A8T	MS51514B8T	1/2	3/8	J514-8-8-6-070426TA	J514-8-8-6-070426TB
MS51514A8TF	MS51514B8TF	1/2	3/8	Not available	Not available
MS51514A8Z	MS51514B8Z	1/2	3/8	J514-8-8-6-070426ZA	J514-8-8-6-070426ZB
MS51514A8ZC	MS51514B8ZC	1/2	3/8	Not available	Not available
MS51514A10	MS51514B10	5/8	1/2	Not available	Not available
MS51514A10H	MS51514B10H	5/8	1/2	Not available	Not available
MS51514A10J	MS51514B10J	5/8	1/2	Not available	Not available
MS51514A10M	MS51514B10M	5/8	1/2	J514-10-10-8-070426MA	J514-10-10-8-070426MB
MS51514A10N	MS51514B10N	5/8	1/2	J514-10-10-8-070426NA	J514-10-10-8-070426NB
MS51514A10P	MS51514B10P	5/8	1/2	J514-10-10-8-070426PA	J514-10-10-8-070426PB
MS51514A10R	MS51514B10R	5/8	1/2	Not available	Not available
MS51514A10S	MS51514B10S	5/8	1/2	J514-10-10-8-070426SA	J514-10-10-8-070426SB
MS51514A10T	MS51514B10T	5/8	1/2	J514-10-10-8-070426TA	J514-10-10-8-070426TB
MS51514A10TF	MS51514B10TF	5/8	1/2	Not available	Not available
MS51514A10Z	MS51514B10Z	5/8	1/2	J514-10-10-8-070426ZA	J514-10-10-8-070426ZB
MS51514A10ZC	MS51514B10ZC	5/8	1/2	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE II. MS51514 to SAE-J514 cross reference - Continued.

Inactive for new design MS51514- PIN		Tube O.D.	Pipe thread NPTF	For new design SAE-J514 PIN	
Body	Assembly			Body	Assembly
MS51514A12	MS51514B12	3/4	3/4	Not available	Not available
MS51514A12H	MS51514B12H	3/4	3/4	Not available	Not available
MS51514A12J	MS51514B12J	3/4	3/4	Not available	Not available
MS51514A12M	MS51514B12M	3/4	3/4	J514-12-12-12-070426MA	J514-12-12-12-070426MB
MS51514A12N	MS51514B12N	3/4	3/4	J514-12-12-12-070426NA	J514-12-12-12-070426NB
MS51514A12P	MS51514B12P	3/4	3/4	J514-12-12-12-070426PA	J514-12-12-12-070426PB
MS51514A12R	MS51514B12R	3/4	3/4	Not available	Not available
MS51514A12S	MS51514B12S	3/4	3/4	J514-12-12-12-070426SA	J514-12-12-12-070426SB
MS51514A12T	MS51514B12T	3/4	3/4	J514-12-12-12-070426TA	J514-12-12-12-070426TB
MS51514A12TF	MS51514B12TF	3/4	3/4	Not available	Not available
MS51514A12Z	MS51514B12Z	3/4	3/4	J514-12-12-12-070426ZA	J514-12-12-12-070426ZB
MS51514A12ZC	MS51514B12ZC	3/4	3/4	Not available	Not available
MS51514A14	MS51514B14	7/8	3/4	Not available	Not available
MS51514A14H	MS51514B14H	7/8	3/4	Not available	Not available
MS51514A14J	MS51514B14J	7/8	3/4	Not available	Not available
MS51514A14M	MS51514B14M	7/8	3/4	J514-14-14-12-070426MA	J514-14-14-12-070426MB
MS51514A14N	MS51514B14N	7/8	3/4	J514-14-14-12-070426NA	J514-14-14-12-070426NB
MS51514A14P	MS51514B14P	7/8	3/4	J514-14-14-12-070426PA	J514-14-14-12-070426PB
MS51514A14R	MS51514B14R	7/8	3/4	Not available	Not available
MS51514A14S	MS51514B14S	7/8	3/4	J514-14-14-12-070426SA	J514-14-14-12-070426SB
MS51514A12T	MS51514B12T	3/4	3/4	J514-12-14-12-070426TA	J514-12-14-12-070426TB
MS51514A12TF	MS51514B12TF	3/4	3/4	Not available	Not available
MS51514A12Z	MS51514B12Z	3/4	3/4	J514-12-14-12-070426ZA	J514-12-14-12-070426ZB
MS51514A12ZC	MS51514B12ZC	3/4	3/4	Not available	Not available
MS51514A16	MS51514B16	1	1	Not available	Not available
MS51514A16H	MS51514B16H	1	1	Not available	Not available
MS51514A16J	MS51514B16J	1	1	Not available	Not available
MS51514A16M	MS51514B16M	1	1	J514-16-16-16-070426MA	J514-16-16-16-070426MB
MS51514A16N	MS51514B16N	1	1	J514-16-16-16-070426NA	J514-16-16-16-070426NB
MS51514A16P	MS51514B16P	1	1	J514-16-16-16-070426PA	J514-16-16-16-070426PB
MS51514A16R	MS51514B16R	1	1	Not available	Not available
MS51514A16S	MS51514B16S	1	1	J514-16-16-16-070426SA	J514-16-16-16-070426SB
MS51514A16T	MS51514B16T	1	1	J514-16-16-16-070426TA	J514-16-16-16-070426TB
MS51514A16TF	MS51514B16TF	1	1	Not available	Not available
MS51514A16Z	MS51514B16Z	1	1	J514-16-16-16-070426ZA	J514-16-16-16-070426ZB
MS51514A16ZC	MS51514B16ZC	1	1	Not available	Not available
MS51514A20	MS51514B20	1 1/4	1 1/4	Not available	Not available
MS51514A20H	MS51514B20H	1 1/4	1 1/4	Not available	Not available
MS51514A20J	MS51514B20J	1 1/4	1 1/4	Not available	Not available
MS51514A20M	MS51514B20M	1 1/4	1 1/4	J514-20-20-20-070426MA	J514-20-20-20-070426MB
MS51514A20N	MS51514B20N	1 1/4	1 1/4	J514-20-20-20-070426NA	J514-20-20-20-070426NB
MS51514A20P	MS51514B20P	1 1/4	1 1/4	J514-20-20-20-070426PA	J514-20-20-20-070426PB
MS51514A20R	MS51514B20R	1 1/4	1 1/4	Not available	Not available
MS51514A20S	MS51514B20S	1 1/4	1 1/4	J514-20-20-20-070426SA	J514-20-20-20-070426SB
MS51514A20T	MS51514B20T	1 1/4	1 1/4	J514-20-20-20-070426TA	J514-20-20-20-070426TB
MS51514A20TF	MS51514B20TF	1 1/4	1 1/4	Not available	Not available
MS51514A20Z	MS51514B20Z	1 1/4	1 1/4	J514-20-20-20-070426ZA	J514-20-20-20-070426ZB
MS51514A20ZC	MS51514B20ZC	1 1/4	1 1/4	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE II. MS51514 to SAE-J514 cross reference - Continued.

Inactive for new design MS51514- PIN		Tube O.D.	Pipe thread NPTF	For new design SAE-J514 PIN	
Body	Assembly			Body	Assembly
MS51514B24	MS51514A24	1 1/2	1 1/2	Not available	Not available
MS51514B24H	MS51514A24H	1 1/2	1 1/2	Not available	Not available
MS51514B24J	MS51514A24J	1 1/2	1 1/2	Not available	Not available
MS51514B24M	MS51514A24M	1 1/2	1 1/2	J514-24-24-24-070426MB	J514-24-24-24-070426MA
MS51514B24N	MS51514A24N	1 1/2	1 1/2	J514-24-24-24-070426NB	J514-24-24-24-070426NA
MS51514B24P	MS51514A24P	1 1/2	1 1/2	J514-24-24-24-070426PB	J514-24-24-24-070426PA
MS51514B24R	MS51514A24R	1 1/2	1 1/2	Not available	Not available
MS51514B24S	MS51514A24S	1 1/2	1 1/2	J514-24-24-24-070426SB	J514-24-24-24-070426SA
MS51514B24T	MS51514A24T	1 1/2	1 1/2	J514-24-24-24-070426TB	J514-24-24-24-070426TA
MS51514B24TF	MS51514A24TF	1 1/2	1 1/2	Not available	Not available
MS51514B24Z	MS51514A24Z	1 1/2	1 1/2	J514-24-24-24-070426ZB	J514-24-24-24-070426ZA
MS51514B24ZC	MS51514A24ZC	1 1/2	1 1/2	Not available	Not available
MS51514B32	MS51514A32	2	2	Not available	Not available
MS51514B32H	MS51514A32H	2	2	Not available	Not available
MS51514B32J	MS51514A32J	2	2	Not available	Not available
MS51514B32M	MS51514A32M	2	2	J514-32-32-32-070426MB	J514-32-32-32-070426MA
MS51514B32N	MS51514A32N	2	2	J514-32-32-32-070426NB	J514-32-32-32-070426NA
MS51514B32P	MS51514A32P	2	2	J514-32-32-32-070426PB	J514-32-32-32-070426PA
MS51514B32R	MS51514A32R	2	2	Not available	Not available
MS51514B32S	MS51514A32S	2	2	J514-32-32-32-070426SB	J514-32-32-32-070426SA
MS51514B32T	MS51514A32T	2	2	J514-32-32-32-070426TB	J514-32-32-32-070426TA
MS51514B32TF	MS51514A32TF	2	2	Not available	Not available
MS51514B32Z	MS51514A32Z	2	2	J514-32-32-32-070426ZB	J514-32-32-32-070426ZA
MS51514B32ZC	MS51514A32ZC	2	2	Not available	Not available

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

FED-STD-595/36076	FED-STD-595/36176	MS51533	SAE-AMS2417
FED-STD-595/36081	FED-STD-595/36231	ASME B1.1	SAE-AMS2451/5
FED-STD-595/36099	FED-STD-595/36251	ASTM B117	SAE-AMS2451/9
FED-STD-595/36118	FED-STD-595/36270	ASTM B633	SAE-AMS2486
FED-STD-595/36134	FED-STD-595/36280	ASTM B695	SAE-AMS2488
FED-STD-595/36152	FED-STD-595/36293	ASTM F1136/F1136M	SAE-AMS2700
FED-STD-595/36170	MIL-DTL-16232	SAE-AMS-C-81562	SAE-J425
FED-STD-595/36173	MS51531	SAE-AMS-QQ-P-416	SAE-J514

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AR
Navy - OS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2016-062)

Review activities:
Army - AT, MI
Navy - MC
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.