DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


AMSC N/A


REVIEW ACTIVITIES: ARMY - ME

FED SUP CLASS
2320


INACTIVE FOR DESIGN AFTER 16 FEB 88.
©NO SUPERSEDING STANDARD. SEE
MIL-STD-962 FOR STATUS CRITERIA.

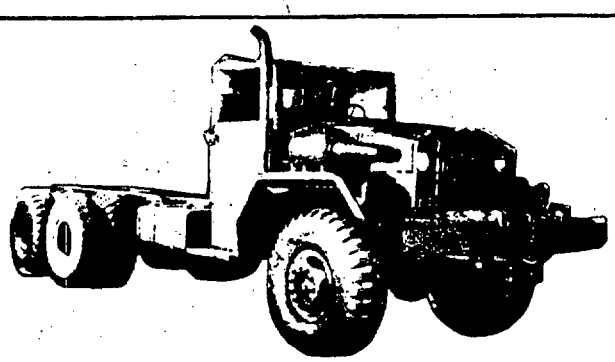

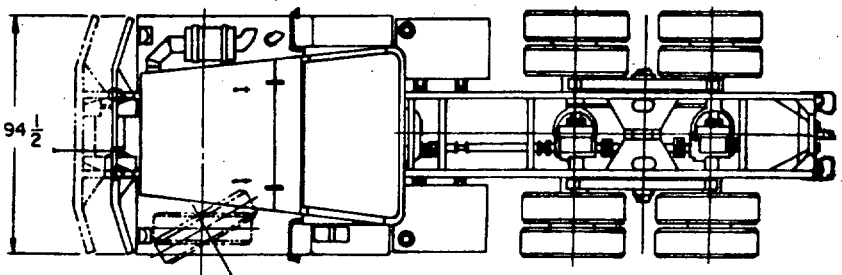

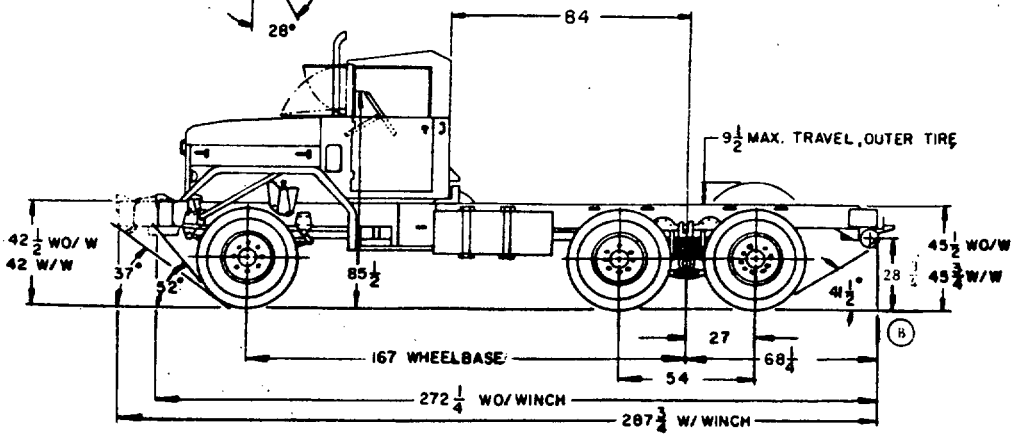

CERTAIN PROVISIONS OF THIS STANDARD, IDENTIFIED BY AN ASTERISK(*) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 2805-A (EDITION 3). WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

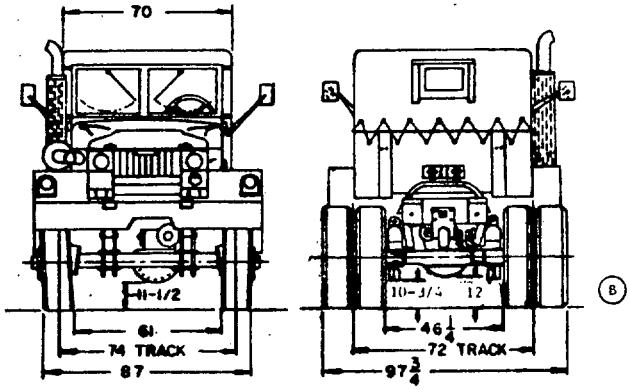

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

(B) DENOTES CHANGE

MS PART NO.	REFERENCE DRAWING	
MS52101 -1	8736524	WITH WINCH
MS 52101 -2	8736525	LESS WINCH

APPROVED 16 DEC. 1968 REVISED (A) 21 OCT 74 (B) 19 FEB 81 (C) 16 FEBRUARY 88

P.A. ARMY-AT Other Cust NAVY-MC AF-99	INTERNATIONAL INTEREST	TITLE CHASSIS, TRUCK, 5 TON, 6X6, 167 INCH WHEELBASE, MILITARY DESIGN, M61A2	MILITARY STANDARD MS 52101
PROCUREMENT SPECIFICATION MIL-T- 740		SUPERSEDES	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2320-A384

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CURB WEIGHT: CHASSIS AND CAB LESS PAYLOAD AND PERSONNEL

	W/WINCH	WO/WINCH
FRONT AXLE	8780 LBS	7770 LBS
REAR AXLE	9100 LBS	9250 LBS
TOTAL	17880 LBS	17020 LBS

GROSS VEHICLE WEIGHT:

	W/W	WO/W
CROSS COUNTRY	32880 LBS.	32020 LBS.
HIGHWAY	42880 LBS.	42020 LBS.

TOWED LOAD, MAXIMUM:
CROSS COUNTRY 15000 LBS
HIGHWAY 30000 LBS

MINIMUM TURNING RADIUS:

	W/WINCH	WO/WINCH
OVER BUMPER	38 FT. 6 IN.	37 FT. 7 IN.

***FORDING DEPTH:** W/KIT- 78 IN. WO/KIT- 30 IN.

POWER PLANT: INSTL. 10938275-1
ENGINE 10951400
SIX CYLINDER, IN LINE
DISPLACEMENT-478 CU. IN. BORE-4.56
STROKE-4.87
COMPRESSION RATIO-22 TO 1
GOVERNED SPEED-2800 RPM
MAX. GROSS HP-210 NET-198 @ 2800 RPM
MAX. GROSS TORQUE-450 FT/LBS
NET-440 FT/LBS @ 2000 RPM
COOLING SYSTEM CAPACITY-38 QTS.
(B) FUEL SYSTEM INSTL. 11608800-1
EXHAUST SYSTEM INSTL. 11593176
CLUTCH-8675958 INSTL. 10871497
CLUTCH, DRIVEN MEMBER (ASSY) 8735503
PRESSURE PLATE ASSY. 8735507

TRANSMISSION ASSY: 8333627
TYPE-SYNCHROMESH
FORWARD SPEEDS-7.31, 4.09, 2.41, 1.44, 1.00:1
REVERSE SPEEDS-7.33:1

TRANSFER TRANSMISSION: INSTL. 10899367
TRANSFER TRANSMISSION 7748580
GEAR RATIO-HIGH 1:1 LOW 2.024:1

FRONT SUSPENSION: INSTL. 10871261
FRONT AXLE- 7346805
FRONT SPRINGS- 7409345
SHOCK ABSORBERS- 7409617

REAR SUSPENSION: INSTL. 10883209
(B) REAR AXLE- 8327007
REAR SPRINGS- 7409613
TORQUE ROD ASSY- 8728126

(B) **FRAME ASSEMBLY:** 11608814
GROSS MEMBERS, SEVEN
SIDE RAIL 9x3x5/16
SECTION MODULUS= 10.7 IN.^{3}
FRONT BUMPER AND LIFTING SHACKLES {WO/WINCH 10883138 / W/WINCH 10883120}
REAR BUMPER AND LIFTING SHACKLES 10883121

TIE DOWNS: 16 W/WINCH 10883123

MIRROR ASSEMBLY, R.V.: 10938274
MIRROR REF. 10906266 MS53015-1
BRACKET 7372703
ARM ASSEMBLY 10883206

(B) FAN: ENGINE COOLING, SIX BLADES 10889866

WHEELS: INCLUDING RIMS MS53044-6
SIZE-20x7.5 OFFSET 6-11/16
RING- MS53045-3

(B) **TIRES:** TEN PLUS ONE SPARE MIL-T-12459D
SIZE-11.00x20, 12 PLY, TREAD-NDOG

TUBES: MS35392-15

(B) **CAB:** INSTL. 11593192-4
CAB ASSEMBLY, SOFT TOP 10883174-1

GENERAL:
TRUCK FRONT END INSTL. 10938339
STEERING INSTL. 8758369
RUNNING BRD. AND BAT'RY BOX INSTL. 10883279
RUNNING BRD. AND TOOL BOX INSTL. 10871471
(B) INSTRUMENT PANEL W/WINCH-10938210-12, WO/WINCH 10938210-13
TACHOMETER INSTL. 10938366
SPEEDOMETER INSTL. 10883378
THROTTLE LINKAGE INSTL. 10938349-1
AIR CLEANER INSTL. 10938336
(B) PROPELLER SHAFT INSTL. 8758182
WINCH INSTL. 10871078
PINTLE INSTL. 10883506
PINTLE HOOK MS51117-1

BRAKES: SERVICE INSTL. 10938410-3
DRUM SIZE-FRONT AND REAR, 16-1/2x5-1/2
(B) PARKING BRAKE CONTROL INSTL. 11608801-1
P.B. DRUM SIZE-14x3

ELECTRICAL SYSTEM:
POTENTIAL-24 VOLT
STARTING MOTOR 10911018-1
(B) GENERATOR-25 AMPS 10950808 OR 7355736
BATTERIES, TWO, 12 VOLT-6TN MS35000
REGULATOR MS51356-1
B.O. DRIVING LIGHTS MS51318
B.O. MARKER LIGHTS MS51303
(B) TRAILER COUPLING SOCKET 8376209

PERFORMANCE:
FUEL TANK CAPACITY- 110 GALLONS
CRUISING RANGE, HIGHWAY- 396 MILES
MAXIMUM SPEED, HIGHWAY- 53 MPH

(B) **ADDITIONAL EQUIPMENT AVAILABLE:**
ARCTIC HEATER KIT, PERSONNEL- 10932106
POWER PLANT, HEATER, INSTL.- 10938375
HOT WATER HEATER, PERSONNEL- 10938450
A-FRAME KIT- 8390117
AIR BRAKE KIT- 8758174
FORDING KIT- 11593175
CLOSURE ASSEMBLY, HARDTOP- 735-176
ELECTRIC BRAKE KIT- 5701909
THERMAL BARRIER KIT- 10938249

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.)

(B) THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM:

US ARMY-TANK AUTOMOTIVE COMMAND
ATTN: DRSTA-GSS
WARREN, MICHIGAN 48090

APPROVED 16 DEC. 1968 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2 (C) 16 FEBRUARY 88

INACTIVE FOR DESIGN AFTER 16 FEB 88.
(C) NO SUPERSEDING STANDARD. SEE MIL-STD-962 FOR STATUS CRITERIA.

P.A. Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		CHASSIS, TRUCK, 5 TON, 6X6, 167 INCH WHEELBASE, MILITARY DESIGN, M61A2	MS 52101
PROCUREMENT SPECIFICATION		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.